

STATE OF DELAWARE

THIS COPY IS FOR INFORMATION
ONLY. YOU MUST PURCHASE
THE PROPOSAL IN ORDER TO
SUBMIT A BID.



DEPARTMENT OF TRANSPORTATION

BID PROPOSAL

for

CONTRACT T201380203.01

CHRISTIANA HIGH SCHOOL STORMWATER MANAGEMENT RETROFITS

NEW CASTLE COUNTY

ADVERTISEMENT DATE: AUGUST 5, 2013

Completion Date 54 Calendar Days

SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION
DELAWARE DEPARTMENT OF TRANSPORTATION
AUGUST 2001

Bids will be received in the Bidder's Room (B1.11.01), Transportation Administration Center, 800 Bay Road,

Dover, Delaware until 2:00 P.M. local time August 27, 2013

**CHRISTIANA HIGH SCHOOL STORMWATER MANAGEMENT RETROFITS
NEW CASTLE COUNTY**

LOCATION

These improvements are located in NEW CASTLE County more specifically shown on the Location Map(s) of the enclosed Plans.

DESCRIPTION

The improvements consist of furnishing all labor and materials for the CONSTRUCTION OF STORMWATER MANAGEMENT RETROFITS INCLUDING A RAIN GARDEN, BIORETENTION FACILITIES, AND OTHER DRAINAGE IMPROVEMENTS AND BMPS AT THE CHRISTIANA HIGH SCHOOL, and other incidental construction in accordance with the location, notes and details shown on the plans and as directed by the Engineer.

COMPLETION DATE

All work on this contract must be complete within 54 Calendar Days . The Contract Time includes an allowance for 4 Weather Days

It is the Department's intent to issue a Notice to Proceed such that work starts on or about October 11, 2013

ELECTRONIC BIDDING

This project incorporates a newer version of the electronic bidding system, Expedite 5.9a. Bidders wishing to use the electronic bidding option will find the installation file on the plan holders bid file disk. The installation file and instructions are also available at: http://www.deldot.gov/information/business/bids/const_proj_bid_info.shtml.



PROSPECTIVE BIDDERS NOTE:

1. No retainage will be withheld on this contract.
2. The Department has adopted an External Complaint Procedure. The procedure can be viewed on our website at; <http://www.deldot.gov/information/business/>, or you may request a copy by calling (302) 760-2555.
3. Make note of the new version of Electronic Bidding software as noted above.

**STATE OF DELAWARE
CONSTRUCTION ITEMS UNITS OF MEASURE**

English Code	English Description	Multiply By	Metric Code	Metric Description	Suggested CEC Metric Code
ACRE	Acre	0.4047	ha	Hectare	HECTARE
BAG	Bag	N/A	Bag	Bag	BAG
C.F.	Cubic Foot	0.02832	m ³	Cubic Meter	M3
C.Y.	Cubic Yard	0.7646	m ³	Cubic Meter	M3
EA-DY	Each Day	N/A	EA-DY	Each Day	EA-DY
EA-MO	Each Month	N/A	EA-MO	Each Month	EA-MO
EA/NT	Each Night	N/A	EA-NT	Each Night	EA/NT
EACH	Each	N/A	EA	Each	EACH
GAL	Gallon	3.785	L	Liter	L
HOUR	Hour	N/A	h	Hour	HOUR
INCH	Inch	25.4	mm	Millimeter	MM
L.F.	Linear Foot	0.3048	m	Linear Meter	L.M.
L.S.	Lump Sum	N/A	L.S.	Lump Sum	L.S.
LA-MI	Lane Mile	1.609	LA-km	Lane-Kilometer	LA-KM
LB	Pound	0.4536	kg	Kilogram	KG
MFBM	Thousand Feet of Board Measure	2.3597	m ³	Cubic Meter	M3
MGAL	Thousand Gallons	3.785	kL	Kiloliter	KL
MILE	Mile	1.609	km	Kilometer	KM
S.F.	Square Foot	0.0929	m ²	Square Meter	M2
S.Y.	Square Yard	0.8361	m ²	Square Meter	M2
SY-IN	Square Yard-Inch	0.8495	m ² -25 mm	Square Meter-25 Millimeter	M2-25 MM
TON	Ton	.9072	t	Metric Ton (1000kg)	TON
N.A.*	Kip	4.448	kN	Kilonewton	N.A.*
N.A.*	Thousand Pounds per Square Inch	6.895	MPa	Megapascal	N.A.*

*Not used for units of measurement for payment.

LOCATION.	<u>i</u>
DESCRIPTION.	<u>i</u>
CONSTRUCTION ITEMS UNITS OF MEASURE.	<u>ii</u>
GENERAL NOTICES.	<u>1</u>
SPECIFICATIONS.....	<u>1</u>
CLARIFICATIONS.	<u>1</u>
ATTESTING TO NON-COLLUSION.....	<u>1</u>
QUANTITIES.	<u>1</u>
PREFERENCE FOR DELAWARE LABOR.....	<u>1</u>
EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS.	<u>1</u>
TAX CLEARANCE.	<u>2</u>
LICENSE.....	<u>2</u>
DIFFERING SITE CONDITIONS.....	<u>2</u>
PREVAILING WAGES.....	<u>3</u>
SUPPLEMENTAL SPECIFICATIONS.	<u>7</u>
SPECIAL PROVISIONS.	<u>9</u>
CONSTRUCTION ITEM NUMBERS.....	<u>11</u>
401502 - ASPHALT CEMENT COST ADJUSTMENT.	<u>12</u>
251503 - PERIMETER FILTER.	<u>13</u>
401699 - QUALITY CONTROL/QUALITY ASSURANCE OF BITUMINOUS CONCRETE	
.....	<u>18</u>
401821 - WMA, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 64-22, PATCHING.....	<u>35</u>
401822 - WMA, SUPERPAVE, TYPE B, 160 GYRATIONS, PG 64-22, PATCHING.....	<u>35</u>
605544 - OBSERVATION WELL.	<u>42</u>
612501 - PVC PIPE, 4".....	<u>43</u>
612502 - PVC PIPE, 6".....	<u>43</u>
701505 - PORTLAND CEMENT CONCRETE PARKING BUMPER.....	<u>44</u>
701506 - REMOVE AND RESET P.C.C. PARKING BUMPER.	<u>45</u>
712535 - CELLULAR CONFINEMENT SHOULDER PROTECTION.	<u>46</u>
715514 - GEOTEXTILE FILTER.	<u>48</u>
720556 - BOLLARD.	<u>49</u>
737523 - PLANTINGS.	<u>50</u>
748530 - REMOVAL OF PAVEMENT STRIPING.	<u>52</u>
763501 - CONSTRUCTION ENGINEERING.	<u>53</u>
763573 - SIGN.	<u>57</u>
UTILITY STATEMENT.	<u>59</u>
RIGHT OF WAY CERTIFICATE.....	<u>61</u>
ENVIRONMENTAL STATEMENT.	<u>63</u>
BID PROPOSAL FORMS.	<u>65</u>
BREAKOUT SHEETS.	<u>79</u>

GENERAL NOTICES

SPECIFICATIONS:

The specifications entitled "Delaware Standard Specifications, for Road and Bridge Construction, August, 2001", hereinafter referred to as the Standard Specifications, Supplemental Specifications, the Special Provisions, notes on the Plans, this Bid Proposal, and any addenda thereto shall govern the work to be performed under this contract.

CLARIFICATIONS:

Under any Section or Item included in the Contract, the Contractor shall be aware that when requirements, responsibilities, and furnishing of materials are outlined in the details and notes on the Plans and in the paragraphs preceding the "Basis of Payment" paragraph in the Standard Specifications or Special Provisions, no interpretation shall be made that such stipulations are excluded because reiteration is not made in the "Basis of Payment" paragraph.

ATTESTING TO NON-COLLUSION:

The Department requires as a condition precedent to acceptance of bids a sworn statement executed by, or on behalf of, the person, firm, association, or corporation to whom such contract is to be awarded, certifying that such person, firm, association, or corporation has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with such contract. The form for this sworn statement is included in the proposal and must be properly executed in order to have the bid considered.

QUANTITIES:

The quantities shown are for comparison of bids only. The Department may increase or decrease any quantity or quantities without penalty or change in the bid price.

PREFERENCE FOR DELAWARE LABOR:

Delaware Code, Title 29, Chapter 69, Section 6962, Paragraph (d), Subsection (4)b

"In the construction of all public works for the State or any political subdivision thereof, or by firms contracting with the State or any political subdivision thereof, preference in employment of laborers, workmen or mechanics shall be given to bona fide legal citizens of the State who have established citizenship by residence of at least 90 days in the State. Each public works contract for the construction of public works for the State or any political subdivision thereof shall contain a stipulation that any person, company or corporation who violates this section shall pay a penalty to the Secretary of Finance equal to the amount of compensation paid to any person in violation of this section."

EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS:

Delaware Code, Title 29, Chapter 69, Section 6962, Paragraph (d), Subsection (7)

"a. As a condition of the awarding of any contract for public works financed in whole or in part by State appropriation, such contracts shall include the following provisions:

During the performance of this contract, the contractor agrees as follows:

1. The contractor will not discriminate against any employee or applicant for employment because of race, creed, color, sex or national origin. The contractor will take positive steps to ensure that applicants are employed, and that employees are treated during employment, without regard to their race, creed, color, sex or national origin. Such action shall include, but not be limited to, the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The contractor agrees

to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.

2. The contractor will, in all solicitations or advertisements for employees placed by or on behalf of the contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, color, sex or national origin.'

TAX CLEARANCE:

As payments to each vendor or contractor aggregate \$2,000, the Division of Accounting will report such vendor or contractor to the Division of Revenue, who will then check the vendor or contractor's compliance with tax requirements and take such further action as may be necessary to insure compliance.

LICENSE:

A person desiring to engage in business in this State as a contractor shall obtain a license upon making application to the Division of Revenue. Proof of said license compliance to be made prior to, or in conjunction with, the execution of a contract to which he has been named.

DIFFERING SITE CONDITIONS,

SUSPENSIONS OF WORK and SIGNIFICANT CHANGES IN THE CHARACTER OF WORK:

Differing site conditions: During the progress of the work, if subsurface or latent physical conditions are encountered at the site differing materially from those indicated in the contract or if unknown physical conditions of an unusual nature, differing materially from those ordinarily encountered and generally recognized as inherent in the work provided for in the contract are encountered at the site, the party discovering such conditions shall promptly notify the other party in writing of the specific differing conditions before they are disturbed and before the affected work is performed.

Upon written notification, the engineer will investigate the conditions, and if he/she determines that the conditions materially differ and cause an increase or decrease in the cost or time required for the performance of any work under the contract, an adjustment, excluding loss of anticipated profits, will be made and the contract modified in writing accordingly. The engineer will notify the contractor of his/her determination whether or not an adjustment of the contract is warranted.

No contract adjustment which results in a benefit to the contractor will be allowed unless the contractor has provided the required written notice.

No contract adjustment will be allowed under their clause for any effects caused on unchanged work.

Suspensions of work ordered by the engineer: If the performance of all or any portion of the work is suspended or delayed by the engineer in writing for an unreasonable period of time (not originally anticipated, customary or inherent to the construction industry) and the contractor believes that additional compensation and/or contract time is due as a result of such suspension or delay, the contractor shall submit to the engineer in writing a request for adjustment within 7 calendar days of receipt of the notice to resume work. The request shall set forth the reasons and support for such adjustment.

Upon receipt, the engineer will evaluate the contractor's request. If the engineer agrees that the cost and/or time required for the performance of the contract has increased as a result of such suspension and the suspension was caused by conditions beyond the control of and not the fault of the contractor, its suppliers, or subcontractors at any approved tier, and not caused by weather, the engineer will make an adjustment (excluding profit) and modify the contract in writing accordingly. The engineer will notify the contractor of his/her determination whether or not an adjustment of the contract is warranted.

No contract adjustment will be allowed unless the contractor has submitted the request for adjustment within the time prescribed.

No contract adjustment will be allowed under this clause to the extent that performance would have been suspended or delayed by any other cause, or for which an adjustment is provided for or excluded under any other term or condition of this contract.

Significant changes in the character of work: The engineer reserves the right to make, in writing, at any time during the work, such changes in quantities and such alterations in the work as are necessary to satisfactorily complete the project. Such changes in quantities and alterations shall not invalidate the contract nor release the surety, and the contractor agrees to perform the work as altered.

If the alterations or changes in quantities significantly change the character of the work under the contract, whether or not changed by any such different quantities or alterations, an adjustment, excluding loss of anticipated profits, will be made to the contract. The basis for the adjustment shall be agreed upon prior to the performance of the work. If a basis cannot be agreed upon, then an adjustment will be made either for or against the contractor in such amount as the engineer may determine to be fair and equitable.

The term "significant change" shall be construed to apply only to the following circumstances:

- (A) When the character of the work as altered differs materially in kind or nature from that involved or included in the original proposed construction or
- (B) When a major item of work, as defined elsewhere in the contract, is increased in excess of 125 percent or decreased below 75 percent of the original contract quantity. Any allowance for an increase in quantity shall apply only to that portion in excess of 125 percent of original contract item quantity, or in case of a decrease below 75 percent, to the actual amount of work performed.

PREVAILING WAGES

Included in this proposal are the minimum wages to be paid various classes of laborers and mechanics as determined by the Department of Labor of the State of Delaware in accordance with Title 29 Del.C. §6960, relating to wages and the regulations implementing that Section.

REQUIREMENT BY DEPARTMENT OF LABOR FOR SWORN PAYROLL INFORMATION

Title 29 Del.C. §6960 stipulates;

(b) Every contract based upon these specifications shall contain a stipulation that the employer shall pay all mechanics and laborers employed directly upon the site of the work, unconditionally and not less often than once a week and without subsequent deduction or rebate on any account, the full amounts accrued at time of payment, computed at wage rates not less than those stated in the specifications, regardless of any contractual relationship which may be alleged to exist between the employer and such laborers and mechanics. The specifications shall further stipulate that the scale of wages to be paid shall be posted by the employer in a prominent and easily accessible place at the site of the work, and that there may be withheld from the employer so much of accrued payments as may be considered necessary by the Department of Labor to pay to laborers and mechanics employed by the employer the difference between the rates of wages required by the contract to be paid laborers and mechanics on the work and rates of wages received by such laborers and mechanics to be remitted to the Department of Labor for distribution upon resolution of any claims.

(c) Every contract based upon these specifications shall contain a stipulation that sworn payroll information, as required by the Department of Labor, be furnished weekly. The Department of Labor shall keep and maintain the sworn payroll information for a period of 6 months from the last day of the work week covered by the payroll.

Bidders are specifically directed to note the Department of Labor's prevailing wage regulations implementing §6960 relating to the effective date of the wage rates, at Part VI., Section C., which in relevant part states:

"Public agencies (covered by the provisions of 29 Del.C. §6960) are required to use the rates which are in effect on the date of the publication of specifications for a given project. In the event that a contract is not executed within one hundred twenty (120) days from the date the specifications were published, the rates in effect at the time of the execution of the contract shall be the applicable rates for the project."

STATE OF DELAWARE
DEPARTMENT OF LABOR
DIVISION OF INDUSTRIAL AFFAIRS
OFFICE OF LABOR LAW ENFORCEMENT
PHONE: (302) 451-3423

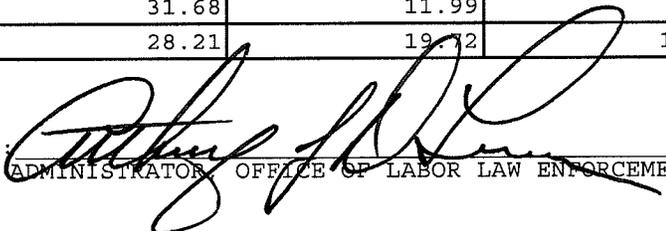
Mailing Address:
225 CORPORATE BOULEVARD
SUITE 104
NEWARK, DE 19702

Located at:
225 CORPORATE BOULEVARD
SUITE 104
NEWARK, DE 19702

PREVAILING WAGES FOR HEAVY CONSTRUCTION EFFECTIVE MARCH 15, 2013

CLASSIFICATION	NEW CASTLE	KENT	SUSSEX
ASBESTOS WORKERS	21.14	18.60	40.43
BOILERMAKERS	69.82	30.73	56.37
BRICKLAYERS	44.98	22.19	23.83
CARPENTERS	50.06	50.06	39.82
CEMENT FINISHERS	23.15	23.30	17.35
ELECTRICAL LINE WORKERS	34.86	26.30	25.89
ELECTRICIANS	60.60	60.60	60.60
GLAZIERS	19.54	16.96	11.48
INSULATORS	51.48	51.48	51.48
IRON WORKERS	58.70	25.54	55.78
LABORERS	38.30	38.30	38.30
MILLWRIGHTS	62.18	62.18	48.75
PAINTERS	58.07	58.07	58.07
PILEDRIVERS	67.87	37.64	29.30
PLASTERERS	18.40	15.97	10.80
PLUMBERS/PIPEFITTERS/STEAMFITTERS	72.03	21.62	17.12
POWER EQUIPMENT OPERATORS	57.06	23.65	57.06
SHEET METAL WORKERS	29.40	18.23	17.13
SPRINKLER FITTERS	31.68	11.99	9.93
TRUCK DRIVERS	28.21	19.72	19.27

CERTIFIED: 7/17/13

BY: 
ADMINISTRATOR OFFICE OF LABOR LAW ENFORCEMENT

NOTE: THESE RATES ARE PROMULGATED AND ENFORCED PURSUANT TO THE PREVAILING WAGE REGULATIONS ADOPTED BY THE DEPARTMENT OF LABOR ON APRIL 3, 1992.

CLASSIFICATIONS OF WORKERS ARE DETERMINED BY THE DEPARTMENT OF LABOR. FOR ASSISTANCE IN CLASSIFYING WORKERS, OR FOR A COPY OF THE REGULATIONS OR CLASSIFICATIONS, PHONE (302) 451-3423.

NON-REGISTERED APPRENTICES MUST BE PAID THE MECHANIC'S RATE.

PROJECT: T201380203-01 Christiana High School Stormwater Management Retrofits, New Castle County

**SUPPLEMENTAL SPECIFICATIONS
TO THE
AUGUST 2001
STANDARD SPECIFICATIONS**

**EFFECTIVE AS OF THE ADVERTISEMENT
DATE OF THIS PROPOSAL
AND INCLUDED BY REFERENCE**

**The Supplemental Specifications can be viewed and printed from
the Department's Website.**

To access the Website;

- in your internet browser, enter; <http://www.deldot.gov>
- on the left side of the page under 'INFORMATION', Click; 'Publications'
- scroll down under 'MANUALS' and Click; "Standard Specifications 2001"

The full Website Link is;

http://www.deldot.gov/information/pubs_forms/manuals/standard_specifications/index.shtml

Printed copies of the Supplemental Specifications are available upon request. A printed copy of the above referenced Supplemental Specifications will be included in the final contract documents upon award.

The Contractor shall make himself aware of these revisions and corrections (Supplemental Specifications), and apply them to the applicable item(s) of this contract.

SPECIAL PROVISIONS

CONSTRUCTION ITEM NUMBERS

All construction pay items are assigned a six (6) digit number, shown as Item Number on the Plans and/or in the Special Provisions, and shall be interpreted in accordance with the following:

Standard Item Number:

The first three digits of the construction item numbers indicates the Section number as described in the Standard Specifications, and all applicable requirements of the Section shall remain effective unless otherwise modified by the Special Provisions. The last three digits of the construction item identifies the item by sequential number under that Section. Sequential numbers for all items covered under Standard Specifications range from 000 to 499. A comprehensive list of construction item numbers begins on page 421 of the Standard Specifications. Additions to this list will be made as required.

Special Provisions Item Number:

The first three digits of the construction items, covered under Special Provisions, indicates the applicable Section number of the Standard Specifications, and shall be governed fully by the requirements of the Special Provisions. The last three digit of the items covered under Special Provisions identifies the item by sequential number. Sequential numbers for Special Provision items, range from 500 to 999.

Examples

Standard Item Number - 202000 Excavation and Embankment

202 Indicates Section Number

000 Indicates Sequential Number

Special Provision Item Number - 202500 Grading and Reshaping Roadway

202 Indicates Section Number

500 Indicates Sequential Number

401502 - ASPHALT CEMENT COST ADJUSTMENT

For Sections 304, 401, 402, 403, 404, and 405, payments to the Contractor shall be adjusted to reflect increases or decreases in the Delaware Posted Asphalt Cement Price when compared to the Project Asphalt Cement Base Price, as defined in these Special Provisions.

The Delaware Posted Asphalt Cement Price will be issued monthly by the Department and will be the industry posted price for Asphalt Cement, F.O.B. Philadelphia, Pennsylvania.

The Project Asphalt Cement Base Price will be the anticipated Delaware Posted Asphalt Cement Price expected to be in effect at the time of receipt of bids.

All deviations of the Delaware Posted Asphalt Cement Price from the Project Asphalt Cement Base Price are eligible for cost adjustment. No minimum increases or decreases or corresponding percentages are required to qualify for cost adjustment.

Actual quantity of asphalt cement qualifying for any Asphalt Cement Cost Adjustment will be computed on the basis of weight tickets and asphalt percentage from the approved job mix formula.

For Recycled Hot-Mix the asphalt percentage eligible for cost adjustment shall be only the new asphalt cement added to the mix.

There shall be no separate payment per ton (metric ton) cost of asphalt cement. That cost shall be included in the various unit prices bid per ton (metric ton) for those bid items that contain asphalt cement (mentioned above).

The Asphalt cement cost adjustment will be calculated on grade PG 64-22 asphalt regardless of the actual grade of asphalt used. The Project Asphalt Cement Base Price for the project will be \$578.33 per ton (\$637.51 per metric ton).

If the Contractor exceeds the authorized allotted completion time, the price of asphalt cement on the last authorized allotted work day, shall be the prices used for cost adjustment during the time liquidated damages are assessed. However, if the industry posted price for asphalt cement goes down, the asphalt-cement cost shall be adjusted downward accordingly.

NOTE

Application of Asphalt Cement Cost Adjustment requirements as indicated above shall apply only to those contracts involving items related to bituminous base and pavements, and with bitumen, having a total of 1,000 tons (1,000 metric tons) or more of hot-mix bid quantity in case of Sections 401, 402 and 403; and 15,000 gallons (60 000 liters) or more in case of Sections 304, 404 and 405.

251503 - PERIMETER FILTER

Description:

This work consists of furnishing, installing, maintain and ultimately removing perimeter filter control as a temporary measure to control sedimentation within the limits of construction. Perimeter filter shall be installed as shown on the details in the Plans, at the locations noted on the Plans, around all stockpile areas and as directed by the Engineer.

Materials:

Perimeter filter control shall be 8" diameter tubular rolls containing filter media, such as SiltSoxx by Filtrexx, Biodegradable Fiber Rolls by American Fiber Rolls and Erosion Control Inc. or an approved equal.

Construction Methods:

Perimeter filter shall be installed according to the manufacturer's specifications. Tubular rolls shall be placed at the locations as indicated on the Plans and shall be anchored to the ground according to the manufacturer's specifications. The tubular rolls shall be in continuous contact with the ground so that all runoff is filtered through the rolls. Any displacement or damage to the rolls shall be addressed as soon as it is brought to the Contractor's attention and the rolls shall be restored to original condition.

Method of Measurement:

The quantity of perimeter filter control will be measured as the actual number of linear feet of perimeter filter placed and accepted.

Measurement and Payment:

The quantity of Perimeter Filter will be paid for at the Contract unit price per linear foot. Price and payment will constitute full compensation for furnishing all materials; for maintain the perimeter filter control during the Project construction period; for removing the perimeter filter with all related hardware after completion of the project; for restoring the site; for seeding and mulching; and for all labor, equipment, tools and incidentals required to complete the work.

No payment will be made for any replacement of or repair to the perimeter filter damaged prior to installation, during installation, or during the life of the Contract. No payment will be made for the replacement of the perimeter filter due to clogging or deterioration.

3/22/13

271502 - BIORETENTION FACILITIES

Description:

This work shall consist of furnishing and placing a soil mixture of peat, shredded mulch, sand, compost and soil for planting in Bioretention facilities, small landscaped basins that provide water quality management by filtering stormwater runoff before it is released into stormdrain systems and waterways, at locations as shown on the Plans, or as directed by the Engineer.

Materials:

The Bioretention Soil, Mix 1 (BSM) is a homogeneous mixture composed by loose volume of 4 parts sand, 2 parts topsoil, 1 part compost material and 3 parts of the following mixture consisting of peat, mulch, and sand:

<u>Item</u>	<u>Composition by Volume</u>	<u>Reference</u>
Peat	33%	See below.
Shredded 3x Hardwood Mulch	33%	See below.
Sand	33%	ASTM C33 Fine Aggregate

Peat shall conform to the requirements of Section 737.07(a). All mulch shall be 3x shredded hardwood bark from a deciduous hardwood source and be relatively free of bark fines dust and shall exclude all foreign and toxic substances.

Topsoil

Topsoil shall conform to the requirement of Section 732.

Compost Material

The compost material shall be the result of biological degradation and transformation of plant-derived materials under conditions that promote anaerobic decomposition. The material shall be well composted, free of viable weed seed, and stable with regard to oxygen consumption and carbon dioxide generation. The compost shall have a moisture content that has no visible free water or dust produced when handling the material. It shall also be tested and meet the following criteria:

<u>Item</u>	<u>Criteria</u>	<u>* Test Method</u>
pH	6.0-8.0	TMECC 4.11
Particle Size	100% pass through a 1/2" screen	TMECC 2.02-B
Maturity	>90% relative to positive control	TMECC 5.05-A
Carbon to Nitrogen Ratio (C:N)	<25:1	
Soluble Salt Concentration	≤6.0mmhos/cm	TMECC 4.10-A
Manufactured Inert Material	<1% dry weight basis	TMECC 3.08-A
Organic Matter	35-95% dry weight basis	TMECC 5.07-A
Moisture Content	40-50%	

* Testing according to the Test Methods for the Examination of Composting and Compost (TMECC).

At least 45 days prior to the start of construction of bio-retention facilities, the Contractor shall submit the BSM to the Engineer for approval. No time extensions will be granted should the proposed BSM fail to meet the minimum requirements stated above. Once a stockpile of the BSM has been sampled, no material shall be added to the stockpile.

The BSM shall be a uniform mix, free of stones, stumps, roots or other similar objects larger than two inches excluding mulch. No other materials or substances shall be mixed or dumped within the bio- retention area that may be harmful to plant growth, or prove a hindrance to the planting or maintenance operations. The BSM shall be free of Bermuda grass, Quackgrass, Johnson grass, Mugwort, Nutsedge, Poison Ivy, Canadian Thistle, or Teathumb.

The Bio-retention Soil Mixture shall be tested and meet the following criteria:

<u>Item</u>	<u>Criteria</u>	<u>Test Method</u>
Corrected pH	5.5-7.5	D4972
Magnesium	Minimum 32 ppm	*
Phosphorus (Phosphate-P2O5)	Not to exceed 69 ppm	*
Potassium (K2O)	Minimum 78 ppm	*
Soluble Salts	Not to exceed 500 ppm	*

* A certificate of chemical analysis shall be provided to the Engineer.

Should the pH fall outside of the acceptable range, it may be modified with lime (to raise) or iron sulfate plus sulfur (to lower). The lime or iron sulfate must be mixed uniformly into the BSM prior to use in bio-retention facilities.

Should the BSM not meet the minimum requirement for magnesium, it may be modified with magnesium sulfate. Likewise, should the BSM not meet the minimum requirement for potassium, it may be modified with potash. Magnesium sulfate and potash must be mixed uniformly into the BSM prior to use in bioretention facilities.

Planting soil and/or BSM that fails to meet the minimum requirements shall be replaced at no additional cost. Mixing of the corrective additives to the BSM is incidental and shall be at no additional cost.

Mixing of the BSM to a homogeneous consistency shall be done to the satisfaction of the Engineer.

Water

Water shall conform to the requirement of Section 803.

Bioretention Facility Vegetation

The Bioretention Facility Vegetation shall conform to the requirements of Section 737.

Triple-Shredded Aged Hardwood Mulching

Triple-Shredded Aged Hardwood Mulch shall conform to the requirements of Section 737.09.

Construction Methods:

Trucks used for hauling of material from the source to the placement site shall be covered with tarp and appropriate measures shall be taken to prevent any leakage or spillage of the material. During hauling operations, the trucks shall not be overloaded in order to prevent spillage. Measures shall be also taken to control odor and dust during haulage.

The Contractor, at all times, shall exercise all practicable and reasonable measures to prevent leakage/spillage during transportation. If hauling operations resulted in any leaking/spilling of material to the road surface, the Contractor shall immediately clean the road surface.

If temporary stockpiling of material is required prior to mixing with other material components and placement, the Contractor shall locate an area for stockpiling as directed by the Engineer. Temporary stockpile area shall be graded flat and polyethylene sheeting with a minimum thickness of 10 mils shall be placed prior to stockpiling. Stockpiled material shall be covered with polyethylene sheeting with a minimum thickness of 10 mils. Dead weights shall be placed on the sheeting on stockpile. The Contractor shall exercise adequate measures to prevent any run-off or run-on from and to the material stockpile as required and as directed by the Engineer.

Bioretention facilities shall be excavated to the dimensions, side slopes, and elevations as specified in the Contract Documents or as directed by the Engineer. The method of excavation shall minimize the compaction of the bottom of the bioretention facilities. Excavators and backhoes, operating on the ground adjacent to the bioretention facilities, shall be used for excavation whenever possible. Otherwise, excavators, backhoes and other equipment shall be wide-track or marsh-track for use within the bioretention facilities. The use of light equipment with turf tires operating within the facility is also acceptable. The use of equipment with narrow tracks or narrow tires, rubber tires with large lugs, or high-pressure tires is prohibited within the perimeter of bioretention facilities.

Excavated materials shall be used or disposed of in conformance with Section 201.

After the excavation is complete, and prior to placing bioretention media, the bottom of the excavation shall be roto-tilled to a minimum depth of 6 in. to alleviate compaction from excavation activities. Any substitute method for roto-tiling must be approved by the Engineer prior to use. Any standing water shall be removed from the bottom of the excavation and the soil shall be friable before roto-tiling. The excavation bottom shall not be roto-tilled while in a muddy or frozen condition.

Observation Well

Observation wells using perforated and non-perforated P.V.C. shall be placed vertically in bioretention facilities as specified in the Contract Documents. The wells shall terminate above the maximum design water surface elevation, as described in the Contract Documents or as directed by the Engineer. The observation well shall be capped with a screw cap. The perforated P.V.C. portion of the well shall be wrapped with an appropriate geotextile sock or filter fabric as recommended and supplied by the manufacturer.

Placement and Compaction of the Bioretention Soil Mix (BSM)

The BSM shall be placed and graded by using excavation hoes operating on the ground adjacent to bioretention facilities or, if the configuration of the bioretention facilities is exceedingly large, wide-track or marsh-track equipment, or light equipment with turf type tires operating within the perimeter of bioretention facilities may be used to place and grade the BSM. The use of equipment with narrow tracks or narrow tires, rubber tires with large lugs or high-pressure tires is prohibited within the perimeter of bioretention facilities.

The BSM shall be placed in horizontal layers not to exceed 12 in. After each lift of BSM is placed, it shall be compacted by saturating with water until the water level in the observation well rises above the BSM layer. Water for saturation shall be applied by spraying or sprinkling. Saturation of each lift shall be performed in the presence and to the satisfaction of the Engineer. An appropriate sediment control device shall be used to treat any sediment-laden water discharged from the perforated pipe system. If the BSM becomes contaminated during the construction of bioretention facilities, the contaminated material shall be removed and replaced with uncontaminated material at no additional cost to the Administration. Final grading of the BSM shall be performed after a 24-hour settling period. Final elevations shall be within 2 in. of elevations specified in the Contract Documents.

Plant Installation

Plant material shall be installed immediately after final grading of bioretention facilities as specified in the Contract Documents.

Mulching

Bioretention facilities shall be mulched in accordance with the following, as appropriate:

Typical

Immediately following plant installation, occurring immediately after final grading, bioretention facilities shall be mulched to a uniform thickness of 3 in., and the mulch shall be raked to an even surface.

Temporary

For plant installation that will commence within 30 calendar days of final grading, bioretention facilities shall be mulched to a minimum thickness of 1 in. immediately following final grading. The mulch shall be raked to an even surface. During plant installation, care shall be taken to prevent contamination of the mulch and BSM. Immediately after plant installation, bioretention facilities shall be mulched to a total uniform thickness of 3 in. and raked to an even surface.

Extended Temporary

For plant installation that will commence beyond 30 calendar days of final grading, bioretention facilities shall be mulched to a uniform thickness of 3 in., and the mulch shall be raked to an even surface. Prior to plant installation, the extended temporary mulching layer shall be removed in its entirety from bioretention facilities and disposed of as excess or unsuitable material. Care shall be taken to prevent the removal of BSM during the mulch removal. Immediately after plant installation, bioretention facilities shall be mulched to a uniform thickness of 3 in. and raked to an even surface.

Method of Measurement and Basis of Payment:

The quantities for bioretention facilities will be measured as each of the various pay items comprising the facility components.

Payment for excavation of the facilities will be made in accordance with Section 202.

The quantity of Bioretention Soil Mix I will be paid for at the Contract unit price per cubic yard. Price and payment will constitute full compensation for all applicable sheeting, shoring, dewatering, roto-tiling necessary to install the BSM; for furnishing all material components of the BSM including the sand, topsoil, compost material, peat and mulch; for all mixing, pH correction, potassium correction, magnesium correction, hauling, storing, re-hauling of material and placement of the BSM backfill, compaction of the BSM backfill by saturation, grading and slope adjustments, and for all material, labor, equipment, tools, and incidentals necessary to satisfactorily complete the work.

Furnishing hauling and placing geotextile will be paid for under Section 715.

Furnishing hauling and placing Delaware No. 57 Stone and Delaware No. 8 stone will be paid for under Section 302.

Furnishing hauling and placing coarse sand will be paid for under Section 209.

Payment for furnishing hauling and placing underdrain, cleanouts and observations wells will be made in accordance with Sections 715 and 605 respectively.

Payment for Furnishing hauling and installing the mulch and plants will be paid at the Contract lump sum price for "Planting" under Section 737.

4/1/13

401699 - QUALITY CONTROL/QUALITY ASSURANCE OF BITUMINOUS CONCRETE

.01 Description.

This item shall govern the Quality Control/Quality Assurance Testing for supplying hot-mix asphalt plant materials and constructing hot-mix asphalt pavements.

The Contractor shall be responsible for providing the quality level of materials and construction incorporated into the Contract that will meet the requirements of the Contract. The Contractor shall perform all necessary quality control inspection, sampling, and testing. The Engineer will evaluate all materials and construction for acceptance. The procedures for Quality Control and Acceptance are described in this Section.

.02 Definitions.

Acceptable Quality Level (AQL): That level of percent within limits (PWL) to which the Engineer will consider the work completely acceptable.

Acceptance Plan: Factors that comprise the Engineer's determination of the degree of compliance with contract requirements and value of the product. These factors include the Engineer's sampling, testing, and inspection.

Delaware Asphalt Pavement Association (DAPA): The organization representing the interests of hot-mix asphalt producers and Contractors. The Engineer has a copy of the DAPA officers' names and point(s) of contact.

Dispute Resolution: The procedure used to resolve conflicts resulting from discrepancies between the Engineer's and the Contractor's results of sufficient magnitude to impact payment. The testing will take place at a location and time mutually agreeable by both the Engineer and the Contractor.

Full Depth Construction – Construction of an adequate pavement box on a subgrade and subbase prepared by the contractor

Independent Assurance: An unbiased and independent verification of the Quality Assurance system used, and the reliability of the test results obtained in regular sampling and testing activities. The results of Independent Assurance are not to be directly used as a basis of material acceptance.

Job Mix Formula (JMF)/Mixture Identification (ID): The target values for individual aggregate size gradation percentages and the asphalt percentage, the sources of each of the component materials, the proposed proportions of component materials to be used to meet those target values, the asphalt proportion, and the mixing temperature. The Engineer will assign uniquely individual mixture identification for each JMF submitted and approved.

Lower Quality Index (QL): The index reflecting the statistic related to the lower boundary to which a sample (or sample statistic) may deviate from the target value and still be considered acceptable.

Mean: A statistical measure of the central tendency – the average value.

Operational Day: A day in which the Engineer has approved a lane closure for the Contractor to perform work within an approved MOT plan.

Percent Within Limits (PWL): That amount of material or workmanship that has been determined, by statistical method, to be within the pre-established characteristic boundary(ies).

Qualified Laboratory: A laboratory mutually agreed upon by both DAPA and the Engineer as having proper test equipment that has been calibrated in accordance to AASHTO.

Qualified Technician: Personnel mutually agreed upon by both DAPA and the Engineer as having adequate training, experience, and abilities to perform the necessary testing. The minimum qualifications are either a recognized nationally accredited or certified Superpave testing certificate or been working in hot-mix asphalt testing for at least one year.

Quality Assurance (QA): All those planned and systematic actions necessary to provide adequate confidence that a product or service will satisfy given requirements for quality.

Quality Control (QC): The sum total of the activities performed by the Contractor in order to assure that the product meets contract requirements.

Quality Control (QC) Plan: The detailed description of the type and frequency of inspection, sampling, and testing deemed necessary to measure and control the various properties governed by the Specifications. The QC Plan must address the actions needed to keep the process in control, detect when the process is going out of control, and responses to correct the situation(s).

Quality Level Analysis: A statistical procedure that provides a method for estimating the percentage of each lot or subplot of material, product, item of construction, or completed construction that may be expected to be within specified tolerances.

Standard Deviation: A term used in statistics to indicate the value calculated from the square root of the difference between the individual measurements in a group and their average. Standard deviation is calculated by taking the square root of the sum of the squares of the differences of each of n values and the mean value, this sum first divided by (n-1).

Target Value: The acceptable value for a controlling characteristic of a product. The JMF will establish each of these values for the material.

Test Methods: Shall be AASHTO test methods. Copies of these test methods shall be available at each qualified laboratory.

Upper Quality Index (QU): The index reflecting the statistic related to the upper boundary to which a sample (or sample statistic) may deviate from the target value and still be considered acceptable.

Volumetric Properties: Air voids, voids in mineral aggregates (VMA), voids filled with asphalt (VFA), and dust to effective asphalt.

.03 Equipment.

(a) Material Production Test Equipment.

The Contractor shall establish, maintain, and operate a qualified testing laboratory at the production plant site of sufficient size and layout that will accommodate the testing operations of both the Contractor and the Engineer. The Contractor shall maintain all the equipment used for handling, preparing, and testing materials in proper operating condition. For any laboratory equipment malfunction, the Contractor shall remedy the situation within one working day or the Engineer may reject production. In the case of an equipment malfunction, and while waiting for repairs to equipment, the Engineer may elect to test the material at either another production facility or the Engineer's laboratory to obtain payment factors.

The following shall be the minimum calibrations for the referenced equipment:

- SUPERPAVE^R Gyratory Compactor: once every year; verified once every month by the Engineer.
- Ovens: once every three months, verified once every month.
- Vacuum Container and Gauge (Rice Bowls): once every three months, verified once every month.
- Balances and Scales: once every year, verified once every month.
- Thermometers: once a year; verified once every month.
- Gyratory Compactor molds and base plates: once every year
- Mechanical Shakers: once every year
- Sieve Verifications: once every year

All calibrations shall be documented and on file for review by the Engineer at any time.

(b) Pavement Construction Test Equipment.

The Contractor shall furnish and use in-place density gauges, or coring equipment, or both, as necessary to meet the requirements of these Specifications.

.04 Quality Control (QC) Plan.

(a) Material Production QC.

(1) Job Mix Formula – Material Production.

The Contractor shall submit for approval to the Engineer the job mix formula (JMF) design of the component materials and target characteristic values for each mixture proposed for use. Once the JMF is submitted to the Engineer, the Engineer will have up to three weeks to review the submitted information. However, a provision for a more timely approval is available to the Contractor; first, the Contractor shall submit the proper documentation on Pinepave mixture design software for the Engineer's approval. After that approval from the Engineer, the Contractor shall produce the new mixture for a non-Department project. The Engineer will test the material, by taking three series per the specifications. If the Engineer's test results are within the specifications, then the mixture will be approved by the Engineer for Department projects.

The component materials design shall include designating the source and the expected proportion (within 1 percent for the aggregate components, and within 0.1 percent for the other components) of each component to be used in order to produce workable hot-mix asphalt having the specified properties. For plant component feed adjustments, RAP can be considered in the same manner as an individual aggregate component. The JMF target characteristic values include the mixing temperature range, core temperature range for gyrations, the percentage of the asphalt cement component (both total and virgin), and the percentages of the aggregate amounts retained on the sieves to be addressed by the JMF as shown in Table 1.

The Contractor shall provide an ignition oven correction number for each JMF. The Contractor shall also supply to the Engineer weighed material of each JMF so correction numbers can be established for the Engineer’s equipment for Dispute Resolution samples.

Prior to starting production of a new mixture, the Contractor shall submit a JMF. For any mixture that has a 20% or greater failure rate on any combined volumetric criteria, the JMF will not be approved for use on Department contracts. In order to be approved, a re-design of the mixture will have to be completed by the Contractor for review and approval by the Engineer. The Contractor shall uniquely title each JMF. The Contractor shall submit test data with each JMF and tests performed by a Qualified Laboratory on representative materials, verifying the adequacy of the design. Refer to the specifications for each mix type in order to determine the design requirements. The JMF sieve percentage values shall conform to the ranges shown in Table 1.

If there is a change in the source of any of the component materials, other than asphalt, if there is a change in the proportions of the aggregate components or the percent passing for each sieve by more than 5 percent from the submitted JMF, or if there is a change in the percentage of the asphalt cement component by 0.2 percent or more, which causes the volumetrics to change from the originally submitted JMF, a new JMF is required. Also, if the asphalt cement target percentage is lowered, all volumetric criteria must still be achieved.

According to the Contractor’s QC Plan, the Contractor shall inform the Engineer of any proposed changes to an existing JMF. The Contractor shall notify the Engineer by electronic mail of the proposed changes. The Engineer will reply to the proposed changes within one operational day and notify the Contractor of the effective date of the changes.

Although a new JMF is not required, the Contractor must notify the Engineer of any change in the proportions of the components. This notification shall include the total change made from the approved JMF proportions, and the effective time of the change.

All submitted JMF’s shall correspond to the Pinepave mixture design software. The Engineer, for evaluation of the submitted JMF, will use the first three test samples. These test results acquired during production shall be within the following range compared to the submitted JMF on the Pinepave mixture design software: G_{mm} : +/- 0.030 and G_{mb} : +/- 0.040

Table 1 - Aggregate Gradation - JMF and Control Point Information

Sieves to be addressed by JMF/Range values are percentages passing by weight										
Sieve Size mm (inch)	4.75 mm	4.75mm Range	9.5 mm	9.5mm Range	12.5 mm	12.5mm Range	19.0 mm	19.0mm Range	25.0 mm	25.0mm Range
37.5(1.5)	No		No		No		No		Yes	100
25.0(1.0)	No		No		No		Yes	100	Yes	90-100
19.0 (3/4)	No		No		Yes	100	Yes	90-100	Yes	20-90
12.5(1/2)	Yes	100	Yes	100	Yes	90-100	Yes	23-90	Yes	
9.5 (3/8)	Yes	95-100	Yes	90-100	Yes	28-90	Yes		Yes	
4.75(#4)	Yes	90-100	Yes	32-90	Yes		Yes		Yes	

Table 1 - Aggregate Gradation - JMF and Control Point Information										
Sieves to be addressed by JMF/Range values are percentages passing by weight										
Sieve Size mm (inch)	4.75 mm	4.75mm Range	9.5 mm	9.5mm Range	12.5 mm	12.5mm Range	19.0 mm	19.0mm Range	25.0 mm	25.0mm Range
2.36(#8)	Yes		Yes	32-67	Yes	28-58	Yes	23-49	Yes	19-45
(#16)	Yes	30-60	Yes		Yes		Yes		Yes	
(#30)	Yes		Yes		Yes		Yes		Yes	
(#50)	Yes		Yes		Yes		Yes		Yes	
(#100)	Yes		Yes		Yes		Yes		Yes	
.075(#200)	Yes	6-12	Yes	2-10	Yes	2-10	Yes	2-8	Yes	1-7

(2) Process Control – Material Production.

The Contractor shall submit in writing (letter or electronic mail) a QC Plan from each proposed production plant to the Engineer; no hot-mix asphalt material will be accepted until the Engineer approves the QC Plan. This plan must be submitted to the Engineer on an annual basis for review and approval prior to material production. The Engineer will send a signed copy back to the Contractor stating that it is approved. The approved QC Plan shall govern contractor operations.

The following are considered significant violations to the Contractor’s QC Plan:

- Using testing equipment that is knowingly out of calibration or is not working properly.
- Reporting false information such as test data, JMF information, or any info requested by DeIDOT
- When the Contractor fails to comply to their approved QC Plan in reference to materials testing
- Substantial deviations to AASHTO or DeIDOT procedures when running tests, sampling stockpiles, or testing hot mix.
- The use of any material not listed in the JMF.
- The use of the wrong PG graded asphalt.
- If samples fall within the Contractors action points in the QC Plan but the Contractor fails to take the corrective action in the approved QC Plan

If a Contractor is found in violation of any of these items, they will receive a written warning for their first violation. If the Contractor is found in violation a second time on any of the criteria, they will forfeit any bonus from that day’s production. If the Contractor is found in violation a third time on any of the criteria, they will receive a five percent (5%) deduction for that day’s production. If the Contractor is found in violation a fourth time, the plant will not be approved for production until such time that the Contractor addresses the violation of the QC plan to the satisfaction of the Engineer. If the Engineer approves the changes in advance, the Contractor may make changes to the QC Plan. All changes shall be submitted and approved in writing by the Engineer.

The QC Plan shall include actions that will assure all materials and products will conform to the specifications, whether manufactured or processed by the Contractor, or procured from suppliers, subcontractors, or vendors. The Contractor shall perform the inspection and tests required to substantiate product conformance to contract requirements. The Contractor shall document QC inspections and tests, and provide copies to the Engineer when requested. The Contractor shall maintain records of all inspections and tests for at least one year. The records shall include the date, time, and nature of deficiency or deficiencies found; the quantities of material involved until the deficiency was corrected; and the date, time, and nature of corrective actions taken.

In the QC Plan, the Contractor shall detail the type and frequency of inspection, sampling, and testing deemed necessary to measure and control the various properties of material and construction governed by the Specifications. The QC Plan shall include the following elements as a minimum:

Production Plant – make, type, capacity, and location.

Production Plant Calibration – components and schedule; address documentation.

Personnel – include name and telephone number for the following individuals:

Person responsible for quality control.

Qualified technician(s) responsible for performing the inspection, sampling, and testing.

Person who has the authority to make corrective actions on behalf of the Contractor.

Testing Laboratory – state the frequency of accuracy checks and calibrations of the equipment used for testing; address documentation.

Locations where samples will be obtained and the sampling techniques for each test

Load number of QC samples (1-10 if QA sample is not within trucks 1-10)

Tests to be performed and their normal frequency; the following, at a minimum, shall be conducted:

Mixture Temperature: each of the first five trucks, and each load that is sampled for QC or acceptance testing.

Gradation analysis of aggregate (and RAP) stockpiles – one washed gradations per week for each aggregate stockpile; RAP: five gradations and asphalt cement contents for dedicated stockpiles where new material is not being added; one gradation and asphalt cement content test per week for stockpiles where material is continually being added to the stockpile.

Gradation analysis of non-payment sieves

Dust to effective asphalt calculation

Moisture content analysis of aggregates – daily.

Gradation analysis of the combined aggregate cold feed – one per year per mixture.

Bulk specific gravity and absorption of blended material – one per year per mixture.

Ignition Oven calibration – one per year per mixture.

Hot-Bins: one per year per mixture.

Others, as appropriate.

Procedures for reporting the results of inspection and tests (include schedule).

Procedures for dealing with non-compliant material or work.

Presentation of control charts. The Contractor shall plot the results of testing on individual control charts for each characteristic. The control charts shall be updated within one working day as test results for each subplot become available. The control charts shall be easily and readily accessible at the plant laboratory. The following parameters shall be plotted from the testing:

Asphalt cement content.

Volumetrics (air voids, voids in mineral aggregates [VMA])

Gradation values for the following sieves:

- 4.75 mm (#4).

- 2.36 mm (#8).

- 0.075 mm (#200).

Operational guidelines (trigger points) to address times when the following actions would be considered:

Increased frequency of sampling and testing.

Plant control/settings/operations change.

JMF adjustment.

JMF change (See Section .04(a)(1)).

Change in the source of the component materials.

Calibration of material production equipment (asphalt pump, belt feeders, etc.).

Rejection of material.

When any point of non-compliance with the QC plan, or material not meeting the Specifications, comes to the attention of either the Contractor or the Engineer, the other party shall be notified immediately, and the Contractor shall take appropriate corrective actions. Failure to take corrective actions immediately shall be cause for rejection of material or work by the Engineer.

(b) Pavement Construction – Process Control.

The Contractor shall perform Quality Control of pavement compaction by testing in-place pavement with a density gauge or by testing cores extracted from the pavement. The use of the nuclear density gauge shall conform to ASTM D2950; the use of other density gauges shall be as per the manufacturer's recommendations and approved by the Engineer. The Contractor may use any method to select locations for the Quality Control.

.05 Acceptance Plan.

(a) Material Production – Tests and Evaluations.

The Engineer will conduct acceptance tests. The Engineer will directly base acceptance on the acceptance test results, the asphalt cement quality, the Contractor's QC Plan work, and the comparisons of the acceptance test results to the QC test results. The Engineer may elect to utilize test results of the Contractor in some situations toward judging acceptance. All acceptance tests shall be performed by qualified technicians at qualified laboratories following AASHTO or DelDOT procedures, and shall be evaluated using Quality Level Analysis.

The Contractor shall supply, capture, and mark samples, as directed, from delivery trucks before the trucks leave the production plant. The sample shall represent the material produced by the Contractor, and shall be of sufficient size to allow the Engineer to complete all required acceptance tests. The Engineer will direct the Contractor when to capture these samples, on a statistically random, unbiased basis, established before production begins each day based upon the anticipated production tonnage. The captured sample shall be from the Engineer specified delivery truck; if the Contractor visually observes the specified delivery truck sample and does not want this sample to be sampled and tested for acceptance, that delivery truck will not be sent to a Department project. The next visually acceptable delivery truck to the Contractor shall be sampled for acceptance testing.

The first sample of the production day will be randomly generated by the Engineer between loads 0 and 12 (0-250 tons). Subsequent samples will be randomly generated by the Engineer on 500-ton sub-lots for the production day. Unacceptable samples may be a basis for rejection of material if the QC plan is not followed as approved for sample retrieval. If the Contractor wishes to perform parallel tests with the Engineer, or to capture samples to be retained for possible Dispute Resolution, each of the samples for these purposes shall be obtained at the same time and location as the acceptance test sample. Either splitting a large sample or getting multiple samples that equally represent the material is acceptable. The Engineer will perform all splitting and handling of samples after they are obtained by the Contractor.

The Engineer will evaluate and accept the material on a lot basis. All the material within a lot shall have the same JMF (mixture ID). The lot size shall be targeted for 2000 tons or a maximum period of three days, whichever is reached first. If the 2000th ton target lot size is achieved during a production day, the lot size shall extend to the end of that production day. The Contractor may interrupt the production of one JMF in order to produce different material; this type of interruption will not alter the determination of the size or limits of material represented by a lot. The Engineer will evaluate each lot on a subplot basis. The size for each subplot shall be 100 to 500 tons and testing for the sub lots will be completed on a daily basis. For each subplot, the Engineer will evaluate one sample.

The target size of sub-lots within each lot, except for the first sample of the production day, is equal-sized 500 ton sub lots and will be based upon anticipated production, however, more or fewer sublots, with differing sizes, may result due to the production schedule and conditions. If the actual production is less than anticipated, and it's determined a sample will not be obtained (based upon the anticipated tonnage), a new sample location will be determined on a statistically random, unbiased basis based upon the new actual production. If the actual production is going to be 50 tons or greater over the anticipated sub lot production, a new sample location will be determined on a statistically random, unbiased basis based upon the new actual production. The Engineer will combine the evaluation and test results for all of the applicable sublots in order to evaluate each individual lot.

If the Engineer is present, and the quantity exceeds 25 tons, a statistically random sample will be used for analysis. When the anticipated production is less than 100 tons and greater than 25 tons, and the Engineer is not present, the contractor shall randomly select a sample using the Engineer's random location program. The captured sample shall be placed in a suitable box, marked to the attention of the Engineer, and submitted

to the Engineer for testing. A box sample shall also be obtained by the contractor at the same time and will be used as the Dispute Resolution sample if requested by the Engineer. The contractor shall also obtain one liquid asphalt sample (1 pint) per grade of asphalt used per day and properly label it with all pertinent information.

The Engineer will conduct the following tests in order to characterize the material for the pavement compaction quality, and to judge acceptance and the pay adjustment for the material:

AASHTO T312 – Preparing a mixture samples using a gyratory compactor.
AASHTO T166, Method C (Rapid Method) – Bulk specific gravity of compacted samples.
AASHTO T308 – Asphalt cement content.
AASHTO T30 – Aggregate gradations, using samples from the asphalt cement content test.
AASHTO T209 – Theoretical maximum specific gravity.
ASTM Provisional Test Method – Rapid Drying of Compacted and Loose Bituminous Asphalt Specimens using Vacuum Drying Method

(b) Pavement Construction – Tests and Evaluations.

The Engineer will directly base acceptance on the compaction acceptance test results, and on the inspection of the construction, the Contractor's QC Plan work, ride smoothness as referenced in the contract documents, lift thickness as referenced in the contract documents, joint quality as referenced in the contract documents, surface texture as referenced in the contract documents, and possibly the comparisons of the acceptance test results to the independent test results. For the compaction acceptance testing, the Engineer will sample the work on a statistically random basis, and will test and evaluate the work using lots.

Prior to paving a road segment, the Contractor shall notify the Engineer of any locations within that road segment that may not be suitable to achieve minimum (93%) compaction due to existing conditions. The Contractor shall schedule and hold a meeting in the field with the Engineer in order to discuss all areas that may potentially be applicable to Table 5a before paving starts. Areas that will be considered for Table 5a will be investigated in accordance to the method described in Appendix B. If this meeting is not held prior to paving, no areas will be considered for Table 5a. Areas of allowable exemptions that will not be cored include the following: partial-depth patch areas, driveway entrances, paving locations of less than 100 tons, areas around manholes and driveway entrances, and areas of paving that are under 400 feet in continuous total length and/or 5 feet in width.

The exempt areas around manholes will be a maximum of 4 feet transversely on either side from the center of the manhole, and 20 feet longitudinally on either side from the center of the manhole. The exempt areas around driveway entrances shall be the entire width of the driveway, and 3 feet from the edge of the longitudinal joint next to the driveway. Areas of exemption that will be cored for informational purposes only shall include: areas where the mat thickness is less than three times the nominal maximum aggregate size as directed by the Engineer, violations of Section 401.08 in the Standard Specifications as directed by the Engineer, and areas shown to contain questionable subgrade properties as proven by substantial yielding under a fully legally loaded truck. Failure to obtain core samples in these areas will result in zero payment for compaction regardless of the exempt status.

The Engineer will evaluate and accept the compaction work on a daily basis. Payment for the compaction will be calculated by using the material production lots as referenced in **.05 Acceptance Plan (a) Material Production – Tests and Evaluation** and analyzing the compaction results over the individual days covered in the material production lot. The compaction results will be combined with the material results to obtain a payment for this item.

The minimum size of a compaction lot shall be 100 tons. If the compaction lot is between 101 and 1000 tons, the Engineer shall randomly determine four compaction acceptance test locations. If the compaction lot is between 1001 and 1500 tons, the Engineer shall randomly determine six compaction acceptance test locations. If the compaction lot is between 1501 and 2000 tons, the Engineer shall randomly determine eight compaction acceptance test locations. If the compaction lot is greater than 2000 tons, the Engineer shall randomly determine two compaction acceptance test locations per 500 tons.

If a randomly selected area falls within an Engineer approved exemption area, the Engineer will select one more randomly generated location to be tested per the requirements of this Specification. If that cannot be accomplished, or if an entire location has been declared exempt, the compaction testing shall be performed

as per these Specifications but a note will be added to the results that the location was an Engineer approved exempt location.

Testing locations will be a minimum of 1.5 feet from the newly placed longitudinal joint and 50 feet from a new transverse joint. If the Contractor chooses to cut companion cores, they shall be located within one foot of the Engineers cores along the longitudinal direction and in-line with the Engineers cores in the longitudinal plane.

Exactly at the locations marked by the Engineer, the Contractor shall cut a core, 6 inches in diameter, through the full lift depth. Cores submitted that are not from the location designated by the Engineer will not be tested and will be paid at zero pay.

The Contractor shall notify the Engineer prior to starting paving operations with approximations of the tonnage to be placed. The Contractor is then responsible for notifying the appropriate Engineer test personnel within 12 hours of material placement. The Engineer will then have 24 hours to mark the core locations. After determination of locations, the Contractor shall complete testing within two operational days of the locations being marked. If the cores are not cut within two operational days, the area in question will be paid at zero pay for compaction testing.

The Contractor shall provide any traffic control required for the structural number investigation, sampling, and testing work at no additional cost to the Department.

The Contractor shall cut each core with care in order to prevent damaging the core. The pavement shall have a maximum temperature of 140 °F when cores are cut from it. Immediately upon removal of a core from the roadway, the Contractor shall adequately label it. The Contractor shall protect the core by supplying a 6-inch plastic concrete cylinder mold, or an approved substitute, and placing the core in it. If more than one core is in the same mold, the Contractor shall place paper between them. The Contractor shall attach a completed QC test record for the representative area to the corresponding core. The Engineer will also complete a test record for areas tested for the QA report and provide to Materials & Research. At the end of every production day, the Contractor shall deliver the cores to the Engineer for testing, processing, and report distribution.

The Contractor shall repair the core hole per Appendix A, Repairing Core Holes in Hot-Mix Asphalt Pavements. Core holes shall be filled immediately. Failure to repair core holes at the time of coring will result in zero pay for compaction testing for the area in question.

The Engineer will conduct the following tests on the applicable portion of the cores in order to evaluate their quality:

AASHTO T166, Method C (Rapid Method) – to determine the bulk specific gravity of the cores.

AASHTO T209 – to calculate the theoretical maximum specific gravity and the density of the non-compacted mixtures.

ASTM Provisional Test Method – Rapid Drying of Compacted and Loose Bituminous Asphalt Specimens using Vacuum Drying Method.

The Engineer will use the average of the last five test values of the same JMF (mixture ID) material at the production plant in order to calculate the average theoretical maximum specific gravity of the cores. The average will be based on the production days test results and as many test results needed from previous days production to have an average of five samples. If there are less than five values available, the Engineer will use the JMF design value in addition to the available values to calculate the average theoretical maximum specific gravity.

.06 Payment and Pay Adjustment Factors.

The Contractor shall include the costs for all materials, labor, equipment, tools, and incidentals necessary to meet the requirements of this specification in the bid price per ton for the hot-mix asphalt. Payment to the Contractor for the hot-mix asphalt item(s) will be based on the Contract price per ton and the pay adjustments described in this specification. The Engineer will determine pay adjustments for the hot-mix asphalt item(s) based on the Acceptance Plan. The Engineer will determine both a pay adjustment for the material and a pay adjustment for the pavement construction. Note that the material portion of the total pay

adjustment is 70 percent and the pavement construction portion is 30 percent. For replaced material or work, the Engineer will not apply the Pay Adjustment applicable to the material or work replaced; a new Pay Adjustment will be calculated based on the qualities of the new material. Even if one portion of the pay adjustment (material or construction) is not applied, the Engineer may apply the pay adjustment to the other portion. All adjustments (bonus or penalty) shall be paid under this item number in the contract.

(a) Material Production – Pay Adjustment.

The Engineer will determine the material pay adjustment by evaluating the production material based on the following parameters:

- Gradation of the 2.36 mm (#8) sieve.
- Gradation of the 0.075 mm (#200) sieve.
- Asphalt cement content.
- Air void content

Using the JMF target value, the single test tolerance (from Table 3), and the test values, the Engineer will use the following steps to determine the material pay adjustment factor for each lot of material:

1. For each parameter, calculate the mean value and the standard deviation of the test values for the lot to the nearest 0.1 unit.
2. For each parameter, calculate the Upper Quality Index (QU):
 $QU = ((JMF \text{ target}) + (\text{single test tolerance}) - (\text{mean value})) / (\text{standard deviation}).$
3. For each parameter, calculate the Lower Quality Index (QL):
 $QL = ((\text{mean value}) - (JMF \text{ target}) + (\text{single test tolerance})) / (\text{standard deviation}).$
4. For each parameter, locate the values for the Upper Payment Limit (PU) and the Lower Payment Limit (PL) from Table 2 – Quality Level Analysis by the Standard Deviation Method. (Use the column for “n” representing the number of sublots in the lot. Use the closest value on the table when the exact value is not listed).
5. Calculate the PWL for each parameter from the values located in the previous step:
 $PWL = PU + PL - 100.$
6. Calculate each parameter’s contribution to the payment adjustment by multiplying its PWL by the weight factor shown in Table 3 for that parameter.
7. Add the calculated adjustments of all the parameters together to determine the Composite PWL for the lot.
8. From Table 4, locate the value of the Pay Adjustment Factor corresponding to the calculated PWL.
9. For each lot, determine the final material price adjustment:

Final Pay Adjustment =

(Lot Quantity) x (Item Bid Price) x (Pay Adjustment Factor) x 70%. This final pay calculation will be paid to the tenth of a percent.

In lieu of being assessed a pay adjustment penalty, the Contractor may choose to remove and replace the material at no additional cost to the Department. If the PWL of any single material characteristic is below 60, the Engineer may require the removal and replacement of the material at no additional cost to the Department.

The test results from the Engineer on production that is less than 100 tons will be combined with the two most recently completed Engineer tests with the same Mixture ID to calculate payment for the lot encompassing the single test. If that cannot be accomplished, the approved JMF will be used to calculate payment for the lot encompassing the single test. Payment for previously closed lots will not be affected by the analysis.

When a sample is out of the acceptable tolerance for any Materials pay criteria, that sample will be isolated. For payment purposes, the test result of the out of acceptable tolerance sample will be combined with the two previous acceptable samples of the same JMF and analyzed per this specification. The material that is considered out of the acceptable tolerance will only include the material within the represented sub-lot (i.e., a maximum of 500 tons). If the previous acceptable test result is from the previous production day, only the material produced on the second production day will be considered out of tolerance. All future sub lots will not include the isolated test.

If, during production, a QA sample test result does not meet the acceptable tolerances and the Contractor QC sample duplicates the QA sample test result, the Contractor can make an appropriate change to the mixture (within the JMF boundaries), and request to have that sample further isolated. If this request is approved, and the Contractor has made a change, the third load after the change will be tested. If that sample test result shows compliance with the specifications, the material that is considered out of the acceptable tolerance will include the material from the previous acceptable test result to the third load after the initially sampled and tested sample. If the sample does not meet the specification requirements, the Engineer will no longer accept material. Production may resume when changes have been made and an acceptable sample and test result is obtained.

PU or PL	QU and QL for “n” Samples						
	n = 3	n = 4	n = 5	n = 6	n = 7	n = 8	n = 9
100	1.16	1.50	1.79	2.03	2.23	2.39	2.53
99		1.47	1.67	1.80	1.89	1.95	2.00
98	1.15	1.44	1.60	1.70	1.76	1.81	1.84
97		1.41	1.54	1.62	1.67	1.70	1.72
96	1.14	1.38	1.49	1.55	1.59	1.61	1.63
95		1.35	1.44	1.49	1.52	1.54	1.55
94	1.13	1.32	1.39	1.43	1.46	1.47	1.48
93		1.29	1.35	1.38	1.40	1.41	1.42
92	1.12	1.26	1.31	1.33	1.35	1.36	1.36
91	1.11	1.23	1.27	1.29	1.30	1.30	1.31
90	1.10	1.20	1.23	1.24	1.25	1.25	1.26
89	1.09	1.17	1.19	1.20	1.20	1.21	1.21
88	1.07	1.14	1.15	1.16	1.16	1.16	1.17
87	1.06	1.11	1.12	1.12	1.12	1.12	1.12
86	1.04	1.08	1.08	1.08	1.08	1.08	1.08
85	1.03	1.05	1.05	1.04	1.04	1.04	1.04
84	1.01	1.02	1.01	1.01	1.00	1.00	1.00
83	1.00	0.99	0.98	0.97	0.97	0.96	0.96
82	0.97	0.96	0.95	0.94	0.93	0.93	0.93
81	0.96	0.93	0.91	0.90	0.90	0.89	0.89
80	0.93	0.90	0.88	0.87	0.86	0.86	0.86
79	0.91	0.87	0.85	0.84	0.83	0.82	0.82
78	0.89	0.84	0.82	0.80	0.80	0.79	0.79
77	0.87	0.81	0.78	0.77	0.76	0.76	0.76
76	0.84	0.78	0.75	0.74	0.73	0.73	0.72
75	0.82	0.75	0.72	0.71	0.70	0.70	0.69
74	0.79	0.72	0.69	0.68	0.67	0.66	0.66

Table 2 – Quality Level Analysis by the Standard Deviation Method							
PU or PL	QU and QL for “n” Samples						
	n = 3	n = 4	n = 5	n = 6	n = 7	n = 8	n = 9
73	0.75	0.69	0.66	0.65	0.64	0.63	0.63
72	0.74	0.66	0.63	0.62	0.61	0.60	0.60
71	0.71	0.63	0.60	0.59	0.58	0.57	0.57
70	0.68	0.60	0.57	0.56	0.55	0.55	0.54
69	0.65	0.57	0.54	0.53	0.52	0.52	0.51
68	0.62	0.54	0.51	0.50	0.49	0.49	0.48
67	0.59	0.51	0.47	0.47	0.46	0.46	0.46
66	0.56	0.48	0.45	0.44	0.44	0.43	0.43
65	0.52	0.45	0.43	0.41	0.41	0.40	0.40
64	0.49	0.42	0.40	0.39	0.38	0.38	0.37
63	0.46	0.39	0.37	0.36	0.35	0.35	0.35
62	0.43	0.36	0.34	0.33	0.32	0.32	0.32
61	0.39	0.33	0.31	0.30	0.30	0.29	0.29
60	0.36	0.30	0.28	0.27	0.27	0.27	0.26
59	0.32	0.27	0.25	0.25	0.24	0.24	0.24

Table 3 - Material Parameter Weight Factors		
Material Parameter	Single Test Tolerance (+/-)	Weight Factor
Asphalt Content	0.4	0.30
#8 Sive (19 mm or >)	7.0	0.30
#8 Sieve (12.5 mm or <)	5.0	0.30
#200 Sieve (0.075 mm) Sieve	2.0	0.30
Air Voids (4.0% Target)	1.5	0.10

Table 4 - PWL Pay Adjustment Factors	
PWL	Pay Adjustment Factor (%)
100	+5
99	+4
98	+3
97	+2
96	+1
95	0
94	(-1)
93	(-2)
92	(-3)
91	(-4)
PWL (when <91)	(PWL - 100)

(b) Pavement Construction – Pay Adjustments.

The Engineer will determine the pavement construction pay adjustment by evaluating the construction of the pavement, based on the following parameter:

Degree of compaction of the in-place material

Using the test values for the cores, the Engineer will use the following steps to determine the pavement construction pay adjustment for each lot of work. Note that the material portion of the total pay adjustment is 70 percent and the pavement construction portion is 30 percent.

1. Calculate the average density values from the subplot tests values, to the nearest 0.1 unit.
2. Calculate the Degree of Compaction:
Degree of Compaction =
 $((\text{Core Bulk Specific Gravity}) / (\text{Theoretical Maximum Specific Gravity})) \times 100\%$.
3. The average compaction for the sublots shall be averaged together for the compaction level of the lot. The lots compaction test level shall be averaged to the whole percent.
4. Locate the value of the Payment Adjustment Factor corresponding to the calculated degree of compaction from Table 5 or Table 5a.
5. Determine the pavement construction price adjustment by using the following formula:
Pay adjustment = (Lot Quantity) x (Bid Price) x (Pay Adjustment Factor) x 30%.

Table 5: Compaction Price Adjustment Highway Locations	
Degree of Compaction (%)	Pay Adjustment Factor (%)
>97	-100*
96	-3
95	0
94	0
93	+5
92	0
91	-15

Table 5: Compaction Price Adjustment Highway Locations	
Degree of Compaction (%)	Pay Adjustment Factor (%)
90	-25
89	-30
≤88	-100*

* or remove and replace it at Engineer's discretion

Table 5a: Compaction Price Adjustment Other¹ Locations	
Degree of Compaction (%)	Pay Adjustment Factor (%)
>96	-100*
95	-2
94	0
93	+3
92	0
91	0
90	0
89	-1
88	-5
87	-15
86	-25
85	-30
84	-100*

* or remove and replace at Engineer's discretion

¹ This chart is to be used for areas where the structural value of the area to be paved is less than 1.75 as determined by the Engineer. See Appendix B – Method for Obtaining Cores for Determination of Roadway Structure. This chart is applicable to rehabilitation work only; full depth construction will not be considered for Table 5a.

.07 Dispute Resolution.

Disputes or questions about any test result shall be immediately brought to the attention of the Contractor and the Engineer. When there is a significant alleged discrepancy regarding the Engineer's acceptance test results, the Contractor must claim a dispute within two operational days of the test date. The following dispute resolution procedures will be used.

The Engineer and the Contractor will review the sample quality, the test method, the laboratory equipment, and the laboratory technician. If these factors are not the cause of the dispute, a third party dispute resolution will be used.

For third party resolution testing, it can be either at another Contractor's laboratory, the Engineer's laboratory, or an independent accredited laboratory. Unless otherwise mutually agreed upon by DAPA and the Engineer, the Engineer's qualified laboratory in Dover and qualified personnel shall conduct the necessary testing for third party Dispute Resolution after the Engineer has provided reasonable notice to allow the Contractor to witness this testing.

When disputes over production testing occur, the samples used for Dispute Resolution testing will be those samples the Contractor properly captured, labeled, and stored, as described in the second paragraph

of the section of these specifications titled **.05 Acceptance Plan, (a) Material Production – Tests and Evaluations**. If no samples are available, the original testing results will be used for payment calculations.

Dispute Resolution samples for air void content will be heated by a microwave oven.

If there is a discrepancy between the Engineer's acceptance test result and the Contractor's test result, the Contractor may ask for the Dispute Resolution sample to be tested. If the Dispute Resolution sample substantiates the original acceptance test result, the Contractor, after two such Dispute Resolution samples, will be charged a fee of \$125 for all further Dispute Resolution cores that substantiate the acceptance test result. If the Dispute Resolution sample substantiates the Contractor's test result, the Contractor will not be charged a fee.

When disputes over compaction core test results occur, the Engineer's acceptance core will be used for the dispute resolution sample. The Contractor will be advised on when the testing will occur as referenced above to witness the testing.

The results of the dispute resolution testing shall replace all of the applicable disputed test results for payment purposes.

7/28/11

Appendix A - Repairing Core Holes in Hot-Mix Asphalt Pavement

Description.

This appendix describes the procedure required to acceptably repair core holes in a bituminous concrete pavement.

Materials and Equipment.

The following material shall be available to complete this work:

Patch Material – A DelDOT approved High Performance Cold Patch material shall be used.

The following equipment shall be available to complete this work:

Sponge or other absorbent material – Used to extract water from the hole.

Compaction Hammer – Shall be mechanical, with a flat, circular tamping face smaller than 6 inches in diameter. The tamping head shall be connected to an electrical, pneumatic, or gasoline driven tamping device.

Construction Method.

After core removal from the hole, remove all excess water from within the hole, and prevent water from re-entering the hole.

Place the patch material in lifts no greater than 3 inches. If the hole is deeper than 3 inches, use two lifts of approximately equal depths so that optimum compaction is achieved. Make sure that the patch surface matches the grade of the existing roadway. Make every effort to achieve the greatest possible compaction

Performance Requirements.

The Engineer will judge the patch on the following basis:

The patch shall be well compacted

The patch surface shall match the grade of the surrounding roadway surface.

Basis of Payment.

No measurement or payment will be made for the patching work. The Contractor must gain the Engineer's acceptance of the patching work before the Engineer will accept the material represented by the core.

Appendix B - Method for Obtaining Cores for Determination of Roadway Structure

The Contractor is responsible for obtaining cores in areas that they propose are eligible for compaction price adjustments according to Table 5a in this specification. Table 5a is not applicable for new full-depth pavement box construction. Cores submitted for this process shall be obtained according to the following process.

1. Contact Materials & Research (M&R) personnel to determine if information about the area is already available. If M&R has already obtained cores in the location that is being investigated, the contractor may opt to use the laboratory information for the investigation and not core the area on their own.
2. If M&R does not have information concerning the section of the roadway, the contractor needs to contact M&R to arrange for verification of coring operations. Arrangements shall be made to allow for an individual from M&R to be on the site when the cores are obtained. Cores will be turned over to M&R for evaluation.
3. The contractor is responsible for providing all traffic control and repairing core holes in accordance to 401699 Appendix A – Repairing Core Holes in Hot-Mix Asphalt Pavements.
4. Cores are to be taken throughout the entire project for the area in question. Cores will be spaced, from the start of the project in increments determined based on field and project specifics. Cores will be evenly distributed throughout the project location. The cores will be taken in the center of the lane in question.
5. Additional cores may be taken at other locations, if surface conditions indicate that there may be a substantial difference in the underlying section. The location of these cores should be documented and submitted to M&R.
6. Cores shall be full depth and include underlying materials. If there is a stone base included in the pavement section, at a minimum 1 core must have information concerning the thickness of the base. This is determined by augering to the subgrade surface.
7. The calculations used to determine the structural capacity of the roadway is as follows. If the contractor finds, upon starting the coring process, that the areas are of greater thickness than applicable to Table 5a, they may terminate the coring process on their own and retract the request.

Structural Number Calculations

Each pavement box material is assigned a structural coefficient based upon AASHTO design guides. The structural coefficient is used to determine the total strength of the pavement section.

Materials used in older pavement sections are assigned lower structural coefficients to compensate for aging of the materials. The coefficients used to determine the structural number of an existing pavement are:

Existing Material	Structural Coefficient
HMA	0.32
Asphalt Treated Base	0.26
Soil Cement	0.16
Surface Treatment (Tar & Chip)	0.10
GABC	0.14
Concrete	0 - 0.7*

- * The Structural Coefficient of Concrete is dependent upon the condition of the concrete. Compressive strengths & ASR analysis are used to determine condition – contact the Engineer if this situation arises.

Newly placed materials use a different set of structural coefficients. They are as follows:

New Material	Structural Coefficient
HMA	0.40
Asphalt Treated Base (BCBC)	0.32
Soil Cement	0.20
GABC	0.14

Example:

Location includes placement of a 1.25” Type C overlay on 2.25” Type B. Existing roadway is cored and is shown to consist of 2” HMA on 7” GABC.

Calculation:

For the Type B lift the calculation would be:

$$\begin{array}{rcl}
 \text{Existing HMA} & 2 * 0.32 & = & 0.64 \\
 \text{GABC} & 7 * 0.14 & = & \underline{0.98} \\
 & & & 1.62
 \end{array}$$

For the Type C lift the calculation would be:

$$\begin{array}{rcl}
 \text{Newly Placed B} & 2.25 * 0.4 & = & 0.90 \\
 \text{Existing HMA} & 2 * 0.32 & = & 0.64 \\
 \text{GABC} & 7 * 0.14 & = & \underline{0.98} \\
 & & & 2.52
 \end{array}$$

401800 - WMA, SUPERPAVE, TYPE C, 115 GYRATIONS, PG 64-22 (CARBONATE STONE)
401801 - WMA, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 64-22 (CARBONATE STONE)
401802 - WMA, SUPERPAVE, TYPE C, 205 GYRATIONS, PG 64-22 (CARBONATE STONE)

401803 - WMA, SUPERPAVE, TYPE C, 115 GYRATIONS, PG 70-22 (CARBONATE STONE)
401804 - WMA, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 70-22 (CARBONATE STONE)
401805 - WMA, SUPERPAVE, TYPE C, 205 GYRATIONS, PG 70-22 (CARBONATE STONE)

401806 - WMA, SUPERPAVE, TYPE C, 115 GYRATIONS, PG 76-22 (CARBONATE STONE)
401807 - WMA, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 76-22 (CARBONATE STONE)
401808 - WMA, SUPERPAVE, TYPE C, 205 GYRATIONS, PG 76-22 (CARBONATE STONE)

401809 - WMA, SUPERPAVE, TYPE B, 115 GYRATIONS, PG 64-22
401810 - WMA, SUPERPAVE, TYPE B, 160 GYRATIONS, PG 64-22
401811 - WMA, SUPERPAVE, TYPE B, 205 GYRATIONS, PG 64-22

401812 - WMA, SUPERPAVE, TYPE B, 115 GYRATIONS, PG 70-22
401813 - WMA, SUPERPAVE, TYPE B, 160 GYRATIONS, PG 70-22
401814 - WMA, SUPERPAVE, TYPE B, 205 GYRATIONS, PG 70-22

401815 - WMA, SUPERPAVE, TYPE B, 115 GYRATIONS, PG 76-22
401816 - WMA, SUPERPAVE, TYPE B, 160 GYRATIONS, PG 76-22
401817 - WMA, SUPERPAVE, TYPE B, 205 GYRATIONS, PG 76-22

401818 - WMA, SUPERPAVE, BITUMINOUS CONCRETE BASE COURSE, 115 GYRATIONS,
PG 64-22

401819 - WMA, SUPERPAVE, BITUMINOUS CONCRETE BASE COURSE, 160 GYRATIONS,
PG 64-22

401820 - WMA, SUPERPAVE, BITUMINOUS CONCRETE BASE COURSE, 205 GYRATIONS,
PG 64-22

401821 - WMA, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 64-22, PATCHING

401822 - WMA, SUPERPAVE, TYPE B, 160 GYRATIONS, PG 64-22, PATCHING

401823 - WMA, SUPERPAVE, BITUMINOUS CONCRETE BASE COURSE, 160 GYRATIONS,
PG-64-22, PATCHING

401824 - WMA, SUPERPAVE, TYPE C, 160 GYRATIONS, PG-64-22, WEDGE

401825 - WMA, SUPERPAVE, TYPE B, 160 GYRATIONS, PG-64-22, WEDGE

401826 - WMA, SUPERPAVE, TYPE C, 115 GYRATIONS, PG 64-22, (NON-CARBONATE
STONE)

401827 - WMA, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 64-22, (NON-CARBONATE
STONE)

401828 - WMA, SUPERPAVE, TYPE C, 205 GYRATIONS, PG 64-22, (NON-CARBONATE
STONE)

401829 - WMA, SUPERPAVE, TYPE C, 115 GYRATIONS, PG 70-22, (NON-CARBONATE
STONE)

401830 - WMA, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 70-22, (NON-CARBONATE
STONE)

401831 - WMA, SUPERPAVE, TYPE C, 205 GYRATIONS, PG 70-22, (NON-CARBONATE
STONE)

401832 - WMA, SUPERPAVE, TYPE C, 115 GYRATIONS, PG 76-22, (NON-CARBONATE
STONE)

401833 - WMA, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 76-22, (NON-CARBONATE
STONE)

401834 - WMA, SUPERPAVE, TYPE C, 205 GYRATIONS, PG 76-22, (NON-CARBONATE
STONE)

- 401835 - THIN WMA, SUPERPAVE, TYPE C, 115 GYRATIONS, PG 64-22**
- 401836 - THIN WMA, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 64-22**
- 401837 - THIN WMA, SUPERPAVE, TYPE C, 115 GYRATIONS, PG 70-22**
- 401838 - THIN WMA, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 70-22**
- 401839 - THIN WMA, SUPERPAVE, TYPE C, 115 GYRATIONS, PG 76-22**
- 401840 - THIN WMA, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 76-22**

Description:

Warm mix asphalt (WMA) is the generic term used to describe the reduction in production, paving, and compaction temperatures achieved through the application of one or more WMA technologies.

WMA may be produced by one or a combination of several technologies involving asphalt foaming processes and equipment or additives that facilitate the reduction of the temperature at which the mix can be placed and satisfactorily compacted thereby permitting the mix to be produced at reduced temperatures from a comparable mix without the Warm Mix Technology.

The following Subsections of the Standard Specifications shall be applicable: 401.01, 401.03 - 401.10, 401.12, and 401.13. All other subsections have been modified herein.

The Contractor shall read and thoroughly understand the requirements of the QA/QC specification as defined in item 401699. It is the responsibility of the Contractor to determine all costs associated with meeting these requirements and to include them in the per ton bids for the various Superpave bituminous concrete items. The Contractor shall also be aware that the pay adjustment factors in item 401699 will be applied to the Superpave item payments to determine the bonus or penalty for the item.

Materials:

If the Contractor proposes to use a combination of materials that are not covered by this Specification, the mix design shall be submitted and reviewed by the Engineer 30 calendar days prior to use.

Conform to the requirements of Subsections 823.01, 823.05- 823.17, and 823.25 - 823.28 of the Standard Specifications and the following for bituminous materials:

Asphalt Binder:

The asphalt binder shall meet the requirements of Superpave performance-grade asphalt binder, as referenced in the Plans, according to M 320¹, Table 1 and tested according to AASHTO R29 with the following test ranges:

TEST PROCEDURE	AASHTO REFERENCE	SPECIFICATION LIMITS
Temperature, °C	M 320	Per Grade
Original DSR, G*/sin (δ)	T 315	1.00 - 2.20 kPa
RTFO DSR, G*/sin (δ)	T 315	>= 2.20 kPa
PAV DSR, G* sin (δ)	T 315	</=5000 kPa
BBR Creep Stiffness, S	T 313	</= 300.0 kPa
BBR m-value	T 313	>/=0.300

Note 1: The exception to M 320 is that the original DSR shall be 1.00 to 2.20 kPa

Substitution of a higher temperature grade will require prior approval by the Engineer.

The highest low temperature grade virgin binder to be used is -22.

Depending on the level of RAP used, the low temperature properties, per T 313, may be different than stated in M 320 or the previous table.

Recycled Materials:

The percentage allowance of recycled asphalt pavement shall be controlled through the use of the Materials & Research recycled mixture program available through the Materials & Research Section. The program can be used by the Contractor to determine which materials and combinations of materials can be used to meet the specified material on the contract.

No recycled asphalt shingles shall be used in WMA.

Mineral Aggregate:

Conform to Section 805 and the following criteria. These criteria apply to the combined aggregate blend.

DESIGN ESAL's (MILLIONS)	COARSE AGGREGATE ANGULARITY ¹ (% MIN)		FINE AGGREGATE ANGULARITY ² (% MIN)		CLAY CONTENT ³ (% - MIN)	FLAT AND ELONGATED ⁴ (% - MAX)
	≤ 100 mm	> 100 mm	≤ 100 mm	> 100 mm		
< 0.3	55/-	-/-	-	-	40	-
0.3 to < 3	75/-	50/-	40	40	40	10
3 to <10	85/80 ⁵	60/-	45	40	45	
10 < 30	95/90	80/75	45	40	45	
30	100/100	100/100	45	45	50	

¹Coarse Aggregate Angularity is tested according to D5821.

²Fine Aggregate Angularity is tested according to TP33.

³Clay Content is tested according to T176.

⁴Flat and Elongated is tested according to D4791 with a 5:1 aspect ratio.

⁵ 85/80 denotes that 85% of the coarse aggregate has one fractured face and 80% has two or more fractured faces.

The following source properties apply to the individual aggregates in the aggregate blend for the proposed JMF.

TEST METHOD	SPECIFICATION LIMITS
Toughness, T96 Percent Loss, Maximum	40
Soundness, T104 Percent Loss, Maximum for five cycles	20
Deleterious Materials, T112 Percent, Maximum	10
Moisture Sensitivity, T283 Percent, Minimum	80

Supply all polish values to the Engineer upon request. The polish value of the composite aggregate blend for any roadway with a minimum average daily traffic volume (ADT) of 8000 vehicles and a posted speed of 35 mph (60 kph) or greater shall be greater than 8.0 when tested according to Maryland State Highway Administration 'MSMT 411 - Laboratory Method of Predicting Frictional Resistance of Polished Aggregates and Pavement Surfaces'. RAP shall be assigned a value of 4.0.

Mineral Filler:

Conform to M17.

Warm Mix Additives:

For any WMA technology requiring addition of any material by the producer during production, the following information will be submitted with the proposed JMF for review and approval at least 30 calendar days prior to production:

1. WMA technology and/or additive information.
2. WMA technology manufacturer's recommendation for usage.
3. WMA technology target dosage rate and tolerance envelope. Support tolerance envelope with test data demonstrating acceptable mix production properties conforming to all sections of this specification.
4. WMA technology manufacturer's material safety data sheets (MSDS).
5. Documentation of past WMA technology field application including points of contact.
6. Temperature ranges for mixing and compacting.
7. Laboratory test data, samples, and sources of all mix components, and asphalt binder viscosity-temperature relationships.

The contractor shall follow the manufacturer's recommendation for incorporating additives and WMA technologies into the mix. The contractor shall also comply with the manufacturer's recommendation regarding receiving, storage, and delivery of additives.

If the producer performs blending of the WMA technology in their tank, a separate Quality Control plan shall be submitted by the producer to the Department for review and approval at least 30 calendar days prior to production.

Mixture Requirements:

Mix Design. Develop and submit a job mix formula for each mixture according to R35. Each mix design shall be capable of being produced, placed, and compacted as specified. Apply all mix design requirements for Superpave to the development of the WMA mix design.

Gradation: The FHWA Superpave 0.45 Power Chart shall be used to define permissible gradations for the specified mixture. Type C shall be either a No.4 (4.75 mm), 3/8" (9.5 mm), or 1/2" (12.5 mm) Nominal Maximum Aggregate Size Hot-Mix. Unless otherwise noted in the Plans, the Type C shall meet the 3/8" (9.5 mm) Nominal Maximum Aggregate Size. Type B Hot-Mix shall be the 3/4" (19.0 mm) Nominal Maximum Aggregate Size and the Bituminous Concrete Base Course (BCBC) shall be the 1" (25.0 mm) Nominal Maximum Aggregate Size. Target values for percent passing each standard sieve for the design aggregate structure shall comply with the Superpave control points and should avoid the restricted zone. Percentages shall be based on the washed gradation of the aggregate according to T11.

Thin WMA, Type C shall be a No. 4 (4.75 mm) Nominal Maximum Aggregate Size Only.

In addition to the results of the material requirements specified above, the following material properties shall be provided by the Contractor: bulk specific gravity G_{sb} , apparent specific gravity G_{sp} and the absorption of the individual aggregate stockpiles to be used, tested according to T84 and T85 and reported to three decimal places along with the specific gravity of the mineral filler to be used, tested according to T100 and reported to three decimal places.

Superpave Gyrotory Compactive (SGC) Effort:

The Superpave Gyrotory Compaction effort employed throughout mixture design, field quality control, or field quality assurance shall be as indicated below. All mixture specimens tested in the SGC shall be compacted to N_{MAX} . Height data provided by the SGC shall be employed to calculate volumetric properties at $N_{INITIAL}$, N_{DESIGN} , and N_{MAX} .

Superpave Gyrotory Compactive (SGC) Effort:

DESIGN TRAFFIC LEVEL (MILLION ESAL'S)	N _{INITIAL}	N _{DESIGN}	N _{MAX}
0.3 to < 3	7	75	115
3 to < 30	8	100	160
30	9	125	205

Volumetric Design Parameters. The design aggregate structure at the target asphalt cement content shall satisfy the volumetric criteria below:

DESIGN ESAL'S (MILLION)	REQUIRED DENSITY (% OF THEORETICAL MAXIMUM SPECIFIC GRAVITY)			VOIDS-IN-MINERAL AGGREGATE (% - MINIMUM) NOMINAL MAX. AGGREGATE (mm)					VOIDS FILLED WITH ASPHALT (% - MINIMUM)
	N _{INITIAL}	N _{DESIGN}	N _{MAX}	25.0	19.0	9.5	12.5	4.75	
0.3 to < 3	≥ 90.5								65.0 - 78.0
3 to < 10	89.0	96.0	≤ 98.0	12.5	13.5	15.5	14.5	16.5	65.0 - 75.0 ¹
10 < 30									
30									

Air voids (V_a) at N_{design} shall be 4.0% for all ESAL designs. Air voids (V_a) at N_{max} shall be a minimum of 2.0% for all ESAL designs

The dust to effective binder ratio for the mix having aggregate gradations above the Primary Control Sieve (PCS) Control Points shall be 0.6-1.2. For aggregate gradations below the PCS Control Points, the dust to binder ratio shall be 0.8-1.6. For the No. 4 (4.75 mm) mix, the dust to binder ratio shall be 0.9-2.0 whether above or below the PCS Control Points.

For 3/8" (9.5 mm) Nominal Maximum Aggregate Size mixtures, the specified VFA range shall be 73.0% to 76.0% and for 4.75 mm Nominal Maximum Size mixtures, the range shall be 75 % to 78% for design traffic levels 3 million ESALs.

Gradation Control Points:

The combined aggregates shall conform to the gradation requirement specified in the following table when tested according to T11 and T27.

Nominal Maximum Aggregates Size Control Points, Percent Passing										
SIEVE SIZE	25.0 mm		19.0 mm		12.5 mm		9.5 mm		4.75 mm	
	MIN	MA X	MIN	MA X	MIN	MAX	MIN	MA X	MIN	MA X
37.5 mm	100	-	-	-	-	-	-	-	-	-
25.0 mm	90	100	100	-	-	-	-	-	-	-
19.0 mm	-	90	90	100	100	-	-	-	-	-
12.5 mm	-	-	-	90	90	100	100	-	100	-
9.5 mm	-	-	-	-	-	90	90	100	95	100
4.75 mm	-	-	-	-	-	-	-	90	90	100
2.36 mm	19	45	23	49	28	58	32	67	-	-
1.18 mm	-	-	-	-	-	-	-	-	30	60
0.075 mm	1	7	2	8	2	10	2	10	6	12

Note: The aggregate gradation for each sieve must fall within the minimum and maximum limits.

Gradation Classification:

The Primary Control Sieve (PCS) defines the break point of fine and coarse mixtures. The combined aggregates shall be classified as coarse graded when it passes below the Primary Control Sieve (PCS) control point as defined below. All other gradations shall be classified as fine graded.

PCS CONTROL POINT FOR MIXTURE NOMINAL MAXIMUM AGGREGATES SIZE (% PASSING)					
Nominal maximum Aggregates Size	25.0 mm	19.0 mm	12.5 mm	9.5 mm	4.5 mm
Primary Control Sieve	4.75 mm	4.75 mm	2.36 mm	2.36 mm	1.18 mm
PCS Control Point	40	47	39	47	30-60

Plant Production Tolerances:

Volumetric Property	Superpave Criteria
Air Voids (V_a) at (%) N_{max} Air Voids (V_a) at N_{design} (%)	2.0 (min) 5.5 (max)
Voids in Mineral Aggregate (VMA) at N_{design} 25.0 mm Bituminous Concrete Base Course 19.0 mm Type B Hot-Mix 12.5 mm Type C Hot-Mix 9.5 mm Type C Hot-Mix 4.5 mm Type C Hot-Mix	-1.2 +2.0

Design Evaluation:

The contractor shall furnish a Job Mix Formula (JMF) for review and approval. The Engineer may elect to evaluate the proposed JMF and suitability of all materials. All materials requested by the Engineer shall be provided at the contractor's expense to the Central Laboratory in Dover in a timely manner upon request. To verify the complete mixture design and evaluate the suitability of all materials, the following approximate quantities are required:

- 5.25 gal (20 liters) of the asphalt binder;
- 0.13 gal (0.5 liters) sample of liquid heat-stable anti-strip additive;
- 254 lb. (115 kg) of each coarse aggregate;
- 154 lb. (70 kg) of each intermediate and fine aggregate;
- 22 lb. (10 kg) of mineral filler; and
- 254 lb. (115 kg) of RAP, when applicable.

The proposed JMF shall include the following:

Plot of the design aggregate structure on the FHWA Superpave 0.45 power chart showing the maximum density line, Superpave control points, and recommended restricted zone.

Plot of the three trial asphalt binder contents at $\pm 0.5\%$ gyratory compaction curves where the percent of maximum specific gravity (% of G_{mm}) is plotted against the log base ten of the number of gyrations (log (N)) showing the applicable criteria for $N_{initial}$, N_{design} , and N_{max} .

Plot of the percent asphalt binder by total weight of the mix (P_b) versus the following:

% of G_{mm} at N_{design} , VMA at N_{design} , VFA at N_{design} , Fines to effective asphalt binder (P_{be}) ratio, and unit weight (kg/m^2) at both N_{design} and N_{max} .

Summary of the consensus property standards test results for the design aggregate structure, summary of the source property standards test results for the individual aggregates in the design aggregate structure, target value of the asphalt binder content, and a table of G_{mm} of the asphalt mixture for the four trial asphalt binder contents determined according to T209.

The JMF shall also include the NCAT Ignition Oven calibration for the specific materials utilized for this mix.

Construction:

Production Plants. The contractor shall modify and/or operate their production plant as required by the manufacturer to introduce the WMA technology.

Weather Limitations. Place mix only on dry, unfrozen surfaces.

The minimum ambient temperature shall be 32 degrees F.

The following table of ambient temperatures for various binder grades and lift thicknesses for placement with the following parameters:

- Minimum surface temperature of 32 degrees F
- Maximum production temperature of 275 degrees F
- Maximum wind speed of 8 miles per hour

Lift Thickness (in)	PG Binder		
	76-22	70-22	64-22
1.50	50F	45F	40F
2.00	40F	38F	35F
3.00	32F	32F	32F

Construction outside of these conditions will be at the discretion of the Engineer.

Compaction:

Compaction shall be tested and paid per Item 401699 - Quality Control/Quality Assurance of Bituminous Concrete .05 (b) Pavement Construction - Tests and Evaluations.

Method of Measurement and Basis of Payment:

Method of Measurement and Basis of Payment will be in accordance with Subsections 401.14 and 401.15 of the Standard Specifications.

The item 401699, will define adjustment factor to be applied to the bituminous concrete payments for bonus or penalty.

9/6/11

605544 - OBSERVATION WELL

Description:

Groundwater observation well may be installed in stormwater facilities as shown in the Contract Documents or as directed by the Engineer. The anticipated well depths are 5 feet to 8 feet.

Material:

The observation well shall consist of 4 inch O.D. PVC pipe. The riser pipe shall extend above the ground surface as described in the Contract Documents or as directed by the Engineer and shall be provided with a cap.

To prevent accidental or malicious fouling of the observation well with debris or foreign material the threaded pipe cap shall be applied tightly enough to require a pipe wrench for removal.

Casing and materials left in place as described above shall become the property of the Department.

Basis of Measurement and Payment:

Measurement for payment for this item will be the actual number of Linear Feet of PVC pipe installed in accordance with these specifications. Payment will be made at the contract unit price per Linear Foot for Observation Well which price shall include the cost of furnishing all materials, equipment and labor necessary to provide and install the completed well.

4/3/13

612501 - PVC PIPE, 4"
612502 - PVC PIPE, 6"
612503 - PVC PIPE, 8"
612504 - PVC PIPE, 10"
612505 - PVC PIPE, 12"
612506 - PVC PIPE, 15"
612507 - PVC PIPE, 18"
612518 - PVC PIPE, 21"

Description:

This work consists of furnishing and installing PVC pipe, including all fittings, in accordance with the locations, details, notes on the Plans and as directed by the Engineer. The PVC pipe shall be used for subsurface drainage or for serving as conduit as specified on the Contract Plans.

Materials and Construction Methods:

The PVC pipe and fittings shall be free from defects and shall conform to the applicable requirements of ASTM D3034 Type PSM, and pipe shall be of SDR-35 or SDR-41 or SDR-42 for subsurface drainage pipe of the nominal size required by the Plans.

The PVC pipe and fittings shall be free from defects and shall conform to the applicable requirements of ASTM D2466 PVC Pipe Fitting, Schedule 40 for conduit of the size required by the Plans.

The excavation and backfill for the pipe shall be performed in accordance with the applicable requirements of Section 612 of the Standard Specifications, unless otherwise modified on the Plans. The pipe shall be installed at the locations and to the lines, grades, and dimensions shown on the Plans or as directed by the Engineer.

Method of Measurement:

The quantity of PVC pipe will be measured as the actual number of linear feet (linear meters) of each size of pipe placed and accepted, measured from end to end of pipe, including structure wall thickness, but excluding structure interior.

Basis of Payment:

The quantity of PVC pipe will be paid for at the Contract unit price per linear foot (linear meter) for each size of pipe. Price and payment will constitute full compensation for furnishing, hauling, and installing pipe, for all cribbing or foundation treatment necessary to prevent settlement, for all shoring and sheeting, for the replacement of any pipe which is not true in alignment or which shows any settlement after laying, and for all material, labor, equipment, tools, and incidentals required to complete the work.

For pipe under 24 (600 mm) nominal inside diameter, the excavation, bedding, backfill and backfilling will be included in the price for this work. For pipe of nominal inside diameter 24 (600 mm and over), payment for excavation, bedding, backfill and backfilling will be in accordance with Section 208.

10/31/01

701505 - PORTLAND CEMENT CONCRETE PARKING BUMPER

Description:

This work consists of furnishing and installing portland cement concrete bumpers in accordance with the details and notes shown on Plans. The locations of installing the parking bumpers shall be in accordance with Plans or will be determined in the field by the Engineer.

Materials and Construction Methods:

Portland cement concrete shall be Class B, and shall conform to the requirements of Section 812, and bar reinforcement shall conform to Section 603 of the Standard Specifications.

Unless specified otherwise on the Plans, each parking bumper shall be anchored with two (2) 18 inch (450 mm) number 13 rebars driven flush with the top of the bumper. Any surface preparation necessary to provide a stable installation of the bumpers will be considered incidental to this item.

Method of Measurement:

The quantity of P.C.C. parking bumpers will be measured as the actual number of bumpers installed and accepted.

Basis of Payment:

The quantity of P.C.C. parking bumpers will be paid for at the Contract unit price per each. Price and payment will constitute full compensation for furnishing all materials including, but not limited to, concrete, bar reinforcement, anchor pins, installing the bumper as directed, for all labor, equipment, tools and incidentals to complete the item.

3/14/02

701506 - REMOVE AND RESET P.C.C. PARKING BUMPER

Description:

This work consists of removing and resetting existing portland cement concrete bumpers in accordance with the details and notes shown on Plans. The new locations for resetting the parking bumpers shall be in accordance with Plans or will be determined in the field by the Engineer.

Materials and Construction Methods:

The Contractor shall remove and reset the parking bumpers exercising precaution to avoid damage. If, in the opinion of the Engineer, the parking bumpers are damaged by the Contractor's negligence, the Contractor shall replace the damaged bumpers at his/her expense.

Unless specified otherwise on the Plans, each parking bumper shall be anchored with two (2) 450 mm number 13 rebars driven flush with the top of the bumper. Reuse of existing anchor pins will be permitted if in the opinion of the Engineer their use will provide satisfactory anchorage.

Any surface preparation necessary to provide a stable installation of the bumpers will be considered incidental to this item.

Method of Measurement:

The quantity of P.C.C. parking bumpers removed and reset will be measured as the actual number of bumpers removed, reset and accepted.

Basis of Payment:

The quantity of P.C.C. parking bumpers removed and reset will be paid for at the Contract unit cost per each. Price and payment will constitute full compensation for removing and resetting the parking bumpers, anchor pins, and for all labor, equipment, tools and incidentals necessary to complete the work.

2/14/00

712535 - CELLULAR CONFINEMENT SHOULDER PROTECTION

Description:

This work consists of furnishing all materials and constructing a filled, cellular shoulder protection system conforming to the lines and grades as shown on the plans and these specifications.

Shop drawing and calculations shall be submitted and approved prior to starting work.

Materials:

The cellular system shall consist of an assembly of extruded H.D.P.E. sheet strips connected in series at off-set, full depth ultrasonic seams, aligned perpendicular to the longitudinal axis of the strips. When expanded, the interconnected strips shall form the walls of a flexible, three-dimensional cellular confinement structure into which the specified in fill materials can be placed. Minimum depth of cells shall be 6".

Polyethylene used to make strips for the geocell sections shall have a density of 0.95-0965 g/cm³ tested per ASTM D1505.

Carbon black shall be used for ultra-violet light stabilization. Carbon black content shall be 1.5% - 2% by weight through the addition of a carrier with a certified carbon black content. The carbon black shall be homogeneously distributed throughout the material.

Polyethylene used to make strips for cell sections shall have an Environmental Stress Crack Resistance (ESCR) of 2000 hour tested per ASTM D1693.

Strips used to make geocell sections shall have a sheet thickness, of 1.27 mm - 5%+10% tested per ASTM D5199. Thickness shall be determined in the flat, before any surface texturing or other surface disruption.

The polyethylene strips shall be perforated with horizontal rows of 0.391 inch diameter holes. Perforations within each row shall be 0.75 inches on-centers. Horizontal rows shall be staggered and separated 0.5 inches relative to the hole centers. The edge of strip to the nearest edge of perforation shall be 0.25 inches minimum and the centerline of the spot weld to the nearest edge of perforation shall be 1-1/4 inches minimum.

The connection between strips shall meet the following test requirements:

Seam Peel Strength

Cell seam strength shall be uniform over the full depth of the cell. Short-term peel strength shall be tested per U.S. Army Corps of Engineers Technical Report GL-86-19, Appendix A. Minimum seam peel strengths shall be 320 lb. for the 6" depth cell.

Seam Hang Strength

Test 1

A 4" wide seam sample shall support a 160 lb. Load for **7 days minimum** in a temperature controlled environment undergoing change on a 1-hour cycle from ambient room temperature to 130° F. Ambient room temperature is define as 73°F 5°F.

Test 2

A 4" seam sample shall support 160 lb. load for **30 days minimum** at ambient room temperature. Ambient room temperature is defined as 73°F 5°F.

The cellular system shall conform to the dimensions shown on the Plans.

Unless specified otherwise, the cell infill material shall be aggregate/topsoil engineered fill conforming to the manufacturers recommendations.

Geotextile, if required on the Plans shall meet the requirements of AASHTO M288, Class 2 with elongation > 50%.

When shown on the plans, the cellular system shall have integral polymeric tendons. The size and composition of the tendons shall be as recommended by the manufacturer of the cellular system and shown on the approved shop drawings.

Materials used to anchor the cellular system to the subgrade and connect adjoining cellular sections together shall be as recommended by the manufacturer of the cellular system and shown on the shop drawings.

Geotextile: Geotextile shall conform to the requirements of Section 827.

Construction Methods:

The shoulder area to receive the protection system shall be shaped to the lines and grades shown on the Plans. Unstable areas shall be corrected to the satisfaction of the Engineer.

The geotextile shall be placed on the compacted subgrade and the aggregate/topsoil engineered fill placed on top of the geotextile to the depth of 2".

The cellular system shall be spread uniformly into position. The connection of adjoining sections and the anchorage of the system to the shoulder area shall be as recommended by the manufacturer and shown on the shop drawings.

The aggregate/topsoil engineered infill material shall be placed into the expanded cells with suitable materials handling equipment such as a backhoe, a front-end loader, or a conveyor. The maximum drop height into the cells shall be limited to a maximum of 3 feet to avoid damage or displacement of the cell walls.

Method of Measurement:

The quantity of cellular confinement shoulder protection will be measured as the number of square feet completed and accepted. The width for measurement will be the width of confinement material shown on the typical cross-sections of the Plans. The length will be measured on the surface along the edge of the adjacent roadway section.

Basis of Payment:

The quantity of cellular confinement shoulder protection will be paid for as the contract unit price per square foot. Price and payment will constitute full compensation for furnishing all materials including cellular system, tendons, anchorage devices, geotextile and aggregate/topsoil engineered fill material; for subgrade preparation; for all labor, tools, equipment and incidentals required to complete the work.

9/4/08

715514 - GEOTEXTILE FILTER

Description:

The work under this item shall consist of the furnishing and installation of a geotextile filter as shown on the Plans and as directed by the Engineer.

Materials:

The geotextile shall be manufactured from fibers consisting of long chain synthetic polymers, composed of a minimum 85 percent by weight of polyolephins, polyesters or polyamides. The geotextile shall resist deterioration from ultraviolet exposure.

All values specified are minimum or maximum roll values.

The geotextile shall have a 0.010 cm/sec minimum permeability when tested in conformance with ASTM D 4491, and an apparent minimum elongation of 20 percent when tested for conformance with the grab tensile strength requirements specified below. The geotextile shall also conform to the following additional requirements:

Maximum Apparent Opening Size - 0.30 mm
Minimum Grab Tensile Strength - 250 psi (1110 N)
Minimum Burst Strength - 500 psi (3.4 MPa)

The properties shall be determined by the following methods:

Apparent Opening Size
ASTM D 4751

Grab Tensile Strength
ASTM D 4632, Grab Test - 4x8 inch (100x200 mm) specimen, 1x2 inch (25x50 mm) clamps, 12 inch (300 mm)/minute strain rate both principal directions of geotextile.

Burst Strength
ASTM D 3786

Sewing of the geotextile will be allowed provided it conforms to the following:

- (a) Seams shall be either "J" or "butterfly" type and shall utilize a lock stitch.
- (b) Seams shall conform to the tensile strength requirements for the geotextile when tested across the seam.
- (c) The thread for seaming shall be of equal or greater durability than the geotextile itself.

Method of Measurement:

This item shall be measured per square yard (meter) of geotextile filter installed and accepted.

Basis of Payment:

The accepted quantities as measured will be paid for at the contract unit price per square yard (meter) for Geotextile Filter which shall be full payment for furnishing and installing the geotextile filter including all necessary hardware, and all labor, tools, and equipment necessary to complete the work as specified.

11/10/04

720556 - BOLLARD

Description:

This work consists of furnishing and installing a removable timber bollard in accordance with the notes, Standard Construction Details and as directed by the Engineer.

Materials and Construction Methods:

The bollard shall be made of seasoned uniform, and straight timber conforming to the requirements of Section 601 and treated with the water borne preservative chromated copper arsenate in accordance with Section 814.

Concrete shall be Class B conforming to the requirements of Section 612.

Reflector panels, if required, shall conform to the requirements of Section 749.

Steel housing for accommodating the bollard shall be galvanized and installed in the hole in vertical position on a 6 (150 mm) bed of stone and encased with concrete as shown on the Standard Construction Details and/or as directed. All hardware shall be galvanized steel.

Method of Measurement:

The quantity of bollards will be measured as the actual number of bollards installed and accepted.

Basis of Payment:

The quantity of bollards will be paid for at the Contract unit price per each. Price and payment will constitute full compensation for furnishing and placing all materials, including stone, steel housing and hardware, reflector panels as shown on the Standard Construction Details, timber and concrete, excavation, backfilling, disposing of the surplus material, for all labor, tools, equipment and necessary incidentals to complete the work.

1/29/02

737523 - PLANTINGS

The requirements of Section 737 shall be followed except as modified below:

Subsection 737.07 Peat Moss and Peat Humus.

Add the following:

- (c) Composed leaf mulch free of wood, metallic substances, glass or other contaminants may be used in lieu of peat moss or peat humus.

Subsection 737.10 Stakes, Guys, and Related Materials.

Delete paragraphs (e),(f) and (h).

Subsection 737.16 Planting.

Delete paragraph (d).

Add the following:

Wire baskets shall be cut away and removed from the top half of the root ball.

Section 737.17 Plant Establishment.

Delete this subsection in its entirety and add the following:

The plant establishment period for all planting shall begin immediately after all planting and replacements (as specified under Section 737.16, Planting) are complete and acceptable to the Engineer. The plant establishment period will consist of one full growing season during which time the Contractor shall be responsible for all work necessary to keep the plants in a live and healthy condition. A growing season is defined as the period from May 1 through September 30. If the Contractor completes all planting (as specified under Planting) by May 1, the inspection will be held on or about October 1 of that year. In the event the Contractor does not complete all planting by May 1, the inspection will be held on or about October 1 of the following year. All replacement plant material determined to be necessary at the inspection must then be approved at the replacement plant source by October 15. At this time, the Engineer will direct the Contractor to replace those plants determined to be dead or unhealthy by December 1. The Contractor will notify the Engineer in writing that all replacement planting has been accomplished. The Engineer will conduct an inspection within 15 days after such notification to determine the acceptability of the replacements. If all replacements are determined satisfactory by the Engineer, the Contractor will be relieved of all further responsibility for care and replacement.

All planting areas shall be kept free of weeds and grass during the life of the Contract. The Contractor may utilize a pre- or post-emergent herbicide to control such grass and broadleaf weeds incidental to the cost of planting and be totally responsible for the proper use and placement of any such herbicide. As requested in writing by the Engineer, the Contractor shall be responsible to weed within all plant beds and within the saucer limits of individual plants, beginning 10 calendar days after the date of notification. The Contractor shall prune and apply insecticides or fungicides as required, repair or replace stakes and guy wires, tighten guy cable or wire and repair plant saucer washouts when and as specified by the Engineer.

Any plants that settle below or rise above the desired finished grades shall be reset at the proper grades. All replacements shall be plants of the same kind, size and quality as originally specified in the Contract and they shall be furnished, planted, mulched, guyed, watered, etc. as specified herein for new plant material.

If dead or unhealthy plants are discovered, they shall be removed within 10 calendar days and replaced with the next appropriate planting season.

The Contractor shall be responsible for all damage incurred to plant material, tree protection, wire or staking regardless of the cause.

The cost of the above described work shall be incidental to Section 737, Planting.

The Contractor shall water all plants as required to sustain them in a healthy condition. The Contractor shall give 24 hours written notice to the Engineer prior to each watering.

Subsection 737.18 Method of Measurement.

Delete the paragraph in its entirety and insert the following:

The quantity of planting will not be measured.

Subsection 737.19 Basis of Payment.

Delete the first two paragraphs in their entirety and insert the following:

The quantity of planting will be paid for at the Contract lump sum. Price and payment will constitute full compensation for furnishing and placing all materials, including plants, soil mixes, and mulch; for protecting plants after digging and prior to planting; for staking, excavating plant pits, pruning, wrapping, and guying; for all watering until final acceptance, for the cultural care of the plants until the completion and acceptance of all landscape work; for disposing of excess and waste materials; for replacement planting; for cleanup; for repairs to plant material, tree protection, wire, or staking due to fire, theft, vehicular damage, or acts of vandalism; for repairs to damaged grassed, planted, or other landscaped area due to the Contractor's operations; for ensuring that topsoil meets the sieve analysis, acidity, and organic matter requirements; for applying sufficient materials to fertilizer that originally failed to meet the specified analysis; for using pre- or post-emergent herbicide to control grass and weeds; for the work outlined under Subsection 737.17; and for all labor, equipment, tools and incidentals required to complete the work.

The breakout sheet attached to the proposal shows all plant material proposed for this Contract. The Contractor shall fill in the per each unit price and the cost (unit price times the proposed quantity) for each species and size listed. The lump sum price bid for item 737523 - Planting shall be the sum of the total cost for all species and sizes listed. The completed typewritten breakout sheet shall be attached to the bid proposal. Failure to submit the breakout sheet with the Bid Proposal will result in the Bid Proposal being declared non-responsive and rejected.

The Department reserves the right to delete from the Contract the furnishing and installing of one or more of the species and/or sizes listed and the right to add or subtract from the quantity of each species and size listed. The lump sum to be paid will be adjusted in accordance with the Contractor's unit prices as required above. There will be no extra compensation to the Contractor if such additions and/or deletion are made.

Payment for the planting as described above may be processed if, in the opinion of the Engineer all work required, except that specified under Subsection 737.17 is satisfactorily completed. No partial payment will be made for any living plant until and unless planted in accordance with these specifications. No additional payment will be made for using plants larger than specified.

5/11/05

748530 - REMOVAL OF PAVEMENT STRIPING

Description:

This work consists of removing pavement markings of all kinds including paint, tape, etc., in accordance with this special provision, notes on Plans and/or as directed by the Engineer. The Contractor shall coordinate with the Engineer for maintaining traffic during the operation, prior to starting the work.

Materials and Construction Methods:

Paint and Epoxy Resins:

Shot/abrasive grit blasting or water blasting equipment shall be used for removal of markings from pavement surfaces.

Alkyd Thermoplastic:

In addition to the removal techniques discussed for paint and epoxy, burning or grinding (erasing machines) equipment may also be used for removal of markings from pavement surfaces.

The removal operation shall be performed in a manner that will not damage the pavement surface.

The Contractor shall collect and dispose of all shot/abrasive grit and pavement marking materials removed from the pavement surface. Washing or sweeping such material to the roadside will not be permitted.

After removal of striping on bituminous concrete, approved flat black paint or asphalt sealer shall be used to cover any exposed aggregate or embedded paint at no additional cost.

Method of Measurement:

The quantity of pavement striping removal will be measured as the number of square feet (meters) of pavement striping removed and accepted. The area of lines will be calculated by multiplying the nominal width of line times the length and the area of symbols will be as specified in Subsection 748.10 of the Standard Specifications.

Basis of Payment:

The quantity of pavement striping removal will be paid for at the Contract unit price per square foot (meter) for "Removal of Pavement Striping". Price and payment shall be full compensation for furnishing all materials, removing the pavement markings, disposing of the removed marking material, covering up the exposed aggregate, and for all labor, equipment, tools and incidentals necessary to complete the work.

Note:

There will be no measurement and payment for removal of pavement markings placed incorrectly by the Contractor.

01/09/06

763501 - CONSTRUCTION ENGINEERING

Description:

This work consists of construction lay out including stakes, lines and grades as specified below. Subsection 105.10 Construction Stakes, Lines and Grades of the Standard Specifications is voided.

Based on contract plans and information provided by the Engineer, the Contractor shall stake out right-of-way and easements lines, limits of construction and wetlands, slopes, profile grades, drainage system, centerline or offset lines, benchmarks, structure working points and any additional points to complete the project.

The Engineer will only establish the following:

- (a) Original and final cross-sections for borrow pits.
- (b) Final cross-sections for all excavation items.
- (c) Line and grade for extra work added on to the project plans.

Equipment:

The Contractor shall use adequate equipment/instruments in a good working order. He/she shall provide written certification that the equipment/instrument has been calibrated and is within manufacturer's tolerance. The certification shall be dated a maximum of 9 months before the start of construction. The Contractor shall renew the certification a minimum of every 9 months. The equipment/instrument shall have a minimum measuring accuracy of [3mm+2ppmxD] and an angle accuracy of up to 2.0 arc seconds or 0.6 milligons. If the Contractor chooses to use GPS technology in construction stakeout, the Contractor shall provide the Engineer with a GPS rover for the duration of the contract. The GPS rover shall be in good working condition and of similar make and model used by the Contractor. The Contractor shall provide up to 8 hours of formal training on the Contractor's GPS system to a maximum of four Engineer's appointees. At the end of the contract, the Engineer will return the GPS rover to the Contractor. If any of the equipment/instruments are found to be out of adjustment or inadequate to perform its function, such instrument or equipment shall be immediately replaced by the Contractor to the satisfaction of the Engineer. The Contractor may utilize GPS equipment to perform the excavation and embankment for the project as indicated on the plans. Use of this procedure and equipment is intended for grading the subgrade surface only; it is not intended for use in constructing final surface grades. GPS technology and machine control technology shall not be used in the construction of bridge or structures such as, but not limited to, curb, drainage inlets, manholes, junction boxes, pole bases and pipe inverts.

Engineering/Survey Staff:

The Contractor shall provide and have available for the project an adequate engineering staff that is competent and experienced to set lines and grades needed to construct the project. The engineering personnel required to perform the work outlined herein shall have experience and ability compatible with the magnitude and scope of the project. Additionally, the Contractor shall employ an engineer or surveyor licensed in the State of Delaware to be responsible for the quality and accuracy of the work done by the engineering staff. When individuals or firms other than the Contractor perform any professional services under this item, that work shall not be subject to the subcontracting requirements of Subsection 108.01 of the Standard Specifications. The Contractor shall assume full responsibility for any errors and/or omissions in the work of the engineering staff described herein. If construction errors are caused due to erroneous work done under Construction Engineering the Contractor accepts full responsibility, no matter when the error is discovered. Consideration will not be given for any extension of contract time or additional compensation due to delays, corrective work, or additional work that may result from faulty and erroneous construction stakeout, surveying, and engineering required by this specification.

Construction Methods:

Performance Requirements:

- (a) Construction Engineering shall include establishing the survey points and survey centerlines; finding, referencing, offsetting the project control points; running a

horizontal and vertical circuit to check the accuracy of given control points. Establishing plan coordinates and elevations marks for culverts, slopes, subbase, subsurface drains, paving, subgrade, retaining walls, and any other stakes required for control lines and grades; and setting vertical control elevations, such as footings, caps, bridge seats and deck screed. The Contractor shall be responsible for the preservation of the Department's project control points and benchmarks. The Contractor shall establish and preserve any temporary control points (traverse points or benchmarks) needed for construction. Any project control points (traverse points) or benchmarks conflicting with construction of the project shall be relocated by the Contractor. The Contractor as directed by the Engineer must replace any or all stakes that are destroyed at any time during the life of the contract. The Contractor shall re-establish centerline points and stationing prior to final cross-sections by the Engineer. The Vertical Control error of closure shall not exceed 0.05 ft times [Square root of number of miles in the level run] (0.01 m times [square root of number of kilometers]). The Horizontal Control accuracy ratio shall not exceed an error of closure of 1 foot per 20,000 feet (1 meter per 20,000 meters or 1:20,000) of distance traversed prior to adjustment.

- (b) The Contractor shall perform construction centerline layout of all roadways, ramps and connections, etc. from project control points set by the Engineer. The Contractor using the profiles and typical sections provided in the plans shall calculate proposed grades at the edge of pavement or verify information shown on Grades and Geometric sheets.
- (c) The Contractor shall advise the Engineer of any horizontal or vertical alignment revisions needed to establish smooth transitions to existing facilities. The Contractor shall immediately bring to the attention of the Engineer any potential drainage problem within the project limits. The Engineer must approve any proposed variation in profile, width or cross slope.
- (d) The Contractor shall establish the working points, centerlines of bearings on bridge abutments and on piers, mark the location of anchor bolts to be installed, check the elevation of bearing surfaces after they are ground and set anchor bolts at their exact elevation and alignment as per Contract Plans. Before completion of the fabrication of beams for bridge superstructures, the Contractor shall verify by accurate field measurements the locations both vertically and horizontally of all bearings and shall assume full responsibility for fabricated beams fitting and bearing as constructed. After beam erection and concurrently with the Department project surveyors, the Contractor shall survey top of beam elevations at a maximum of 10-ft (3.0-meter) stations and compute screed grades. These shall be submitted to the Engineer for review and approval before the stay in place forms are set. Construction stakes and other reference control marks shall be set at sufficiently frequent intervals to assure that all components of the structure are constructed in accordance with the lines and grades shown on the plans. The Contractor will be responsible for all structure alignment control, grade control and all necessary calculations to establish and set these controls.
- (e) The Contractor, using contract plans, shall investigate proposed construction for possible conflicts with existing and proposed utilities. The Contractor shall then report such conflicts to the Engineer for resolution. All stakes for advanced utility relocation, which will be performed by others, shall be paid for under item 763597 – Utility Construction Engineering.
- (f) The Contractor shall be responsible for the staking of all sidewalk and curb ramp grades in accordance with the plans and the Departments Standard Construction Details. The Contractor shall review the stakeout with the Engineer prior to construction. The Engineer must approve any deviation from plans, Department Standard Construction Details and Specifications in writing. The Contractor shall be responsible for any corrective actions resulting from problems created by adjustments if they fail to obtain such approval.

- (g) If wetland areas are involved and specifically defined on the Plans the following shall apply:
- i. It is the intent of these provisions to alert the Contractor, that he/she shall not damage or destroy wetland areas, which exist beyond the construction limits. These provisions will be strictly enforced and the Contractor shall advise his/her personnel and those of any Subcontractor of the importance of these provisions.
 - ii. All clearing operations and delineation of wetlands areas shall be performed in accordance with these Special Provisions. Before any clearing operation commences the Contractor shall demarcate wetlands at the Limits of Construction throughout the entire project as shown on the Plans labeled as Limits of Construction or Wetland Delineation to the satisfaction of the Engineer.
 - iii. The material to be used for flagging the limits of construction shall be orange vinyl material with the wording "Wetland Boundary" printed thereon. In wooded areas, the flagging shall be tied on the trees, at approximate 20-foot (6.1 meter) intervals through wetland areas. In open field and yard areas that have been identified as wetlands, 3 foot (one meter) wooden grade stakes shall be driven into the ground at approximate 20 foot (6.1 meter) intervals and tied with the flagging.
 - iv. If the flagging has been destroyed and the Engineer determines that its use is still required, the Contractor shall reflag the area at no cost to the Department. If the Contractor, after notification by the Engineer that replacement flagging is needed, does not replace the destroyed flagging within 48 hours, the Engineer may proceed to have the area reflagged. The cost of the reflagging by the Engineer will be charged to the Contractor and deducted from any monies due under the Contract.
 - v. At the completion of construction, the Contractor shall remove all stakes and flagging.
 - vi. The Contractor shall be responsible for any damages to wetlands located beyond the construction limits, which occurs from his/her operations during the life of the Contract. The Contractor shall restore all temporarily disturbed wetland areas to their preconstruction conditions. This includes restoring bank elevations, streambed and wetland surface contours and wetlands vegetation disturbed or destroyed. The expense for this restoration shall be borne solely by the Contractor.

Submittals:

All computations necessary to establish the exact position of all work from the control points shall be made and preserved by the Contractor. All computations, survey notes and other records necessary to accomplish the work shall be made available to the Department in a neat and organized manner at anytime as directed by the Engineer. The Engineer may check all or any portion of the stakeout survey work or notes made by the Contractor and any necessary correction to the work shall be made as soon as possible. The Contractor shall furnish the Engineer with such assistance as may be required for checking all lines, grades, and measurements established by the Contractor and necessary for the execution of the work. Such checking by the Engineer shall not relieve the Contractor of his/her responsibility for the accuracy or completeness of the work.

The Contractor shall submit any of the following at the Engineer's request:

- (a) Proposed method of recording information in field books to ensure clarity and adequacy.

- (b) A printout of horizontal control verification, as well as coordinates, differences and error of closure for all reestablished or temporary Control Points.
- (c) A printout of vertical control verification, with benchmark location elevation and differences from plan elevation.
- (d) Sketch of location of newly referenced horizontal control, with text printout of coordinates, method of reference and field notes associated with referencing control.
- (e) Description of newly established benchmarks with location, elevation and closed loop survey field notes.
- (f) All updated electronic and manuscript survey records.
- (g) Stakeout plan for each structure and culvert.
- (h) Computations for buildups over beams, screed grades and overhang form elevations.
- (i) A report showing differences between supplied baseline coordinates and field obtained coordinates, including a list of preliminary input data.
- (j) Any proposed plan alteration to rectify a construction stakeout error, including design calculations, narrative and sealed drawings.
- (k) Baseline for each borrow pit location.
- (l) Detailed sketch of proposed overhead ground mounted signs or signals showing obstructions that may interfere with their installation.
- (m) Copies of cut sheets.

Method of Measurement:

The quantity of Construction Engineering will not be measured.

Basis of Payment:

Payment will be made at the Lump Sum price bid for the item "Construction Engineering". The price bid shall include the cost of furnishing all labor, equipment, instruments, stakes and other material necessary to satisfactorily complete the work as herein described under this item for all roads and structures that are a part of the contract. Adjustment in payment will be made for the deletion or addition of work not shown in the contract documents.

Monthly payment will be made under this item in proportion to the amount of work done as determined by the Engineer.

6/11/2012

763573 - SIGN

Description:

This work consists of furnishing the post, pedestal and materials necessary to install the Christiana High School Retrofit educational signs and posts as specified on the Plans, and as directed. The signs will be furnished by others. The single post pedestals are manufactured to sit down on top of an octagonal extruded aluminum post. The marker is secured to the post by four (4) set screws that will be provided with the pedestal.

Materials:

Post and Foundation: Materials used in the construction of the post and foundation shall meet the minimum materials as shown on the project plans and contract documents.

Sign Pedestal and Posts: Materials shall be Single Post – Angled Base by Fossil Industries (Part #:SPG66), Pannier Graphics Single Pedestal Exhibit Base or an approved equal.

Educational Sign: Sign will be furnished and delivered to the Project Site by DeIDOT

Construction Methods:

The Educational Sign Supports will be installed in the ground in a concrete foundation according to manufacturer's specifications at the locations specified on the Plans. Construction methods shall conform to the project plans, and as directed by the Engineer. The sign pedestal shall be installed according to the requirements as specified by the sign pedestal manufacturer. Refer to the manufacturer's specifications for securing the sign panel to the base.

Concrete shall be Class B conforming to the requirements of Section 812. The concrete shall be poured in place to a depth as specified by the sign pedestal manufacturer.

The backfill material shall be Borrow, Type C, conforming to the requirements of Section 209.

The gravel base shall be Delaware No. 8 Stone conforming to the requirements of Section 805.

Basis of Payment:

Payment will be made at the Contract unit price per Each. The bid price shall include the cost of furnishing all materials, labor, equipment, tools and incidentals necessary to complete the work.

3/22/13



STATE OF DELAWARE
 DEPARTMENT OF TRANSPORTATION
 800 BAY ROAD
 P.O. Box 778
 DOVER, DELAWARE 19903

SHAILEN P. BHATT
 SECRETARY

UTILITY STATEMENT
STATE CONTRACT #T201380203
PROJECT ID#12-24680
CHRISTIANA HIGH SCHOOL STORMWATER MANAGEMENT RETROFITS
NEW CASTLE COUNTY

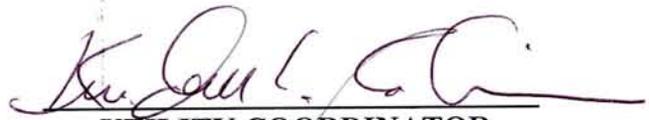
DELMARVA POWER (electric)
 DELMARVA POWER (gas)
 NEW CASTLE COUNTY SANITARY SEWER
 VERIZON DELAWARE
 ARTESIAN WATER
 COMCAST

No utility relocation involvement is anticipated, should any conflicts be encountered during construction requiring adjustment and/or relocation, the necessary relocation work shall be accomplished by the respective agencies, as directed by the District Engineer.

Angel Collazo	Delmarva Power (electric)	(302) 454-4370
Ted Waugh	Delmarva Power (gas)	(302) 429-3706
Dan Netta	New Castle County Dept. of Special Svcs.	(302) 395-5817
George Zang	Verizon Delaware Inc.	(302) 422-1238
Carmen Hunter	Artesian Water	(302) 453-7153
Clint Rupp	Comcast	(302) 661-4462

DIVISION OF TRANSPORTATION SOLUTIONS

02-07-2013
DATE


 UTILITY COORDINATOR



**STATE OF DELAWARE
DEPARTMENT OF TRANSPORTATION
PO BOX 778
DOVER, DELAWARE 19903**

CERTIFICATE OF RIGHT-OF-WAY STATUS

STATE PROJECT NO. T201380203

F.A.P. No. N/A for R/W

**CHRISTIANA HIGH SCHOOL STORMWATER
MANAGEMENT RETROFITS**

NEW CASTLE COUNTY

Certificate of Right-of-Way Status – 100%

As required by 23CFR Part 635, all necessary real property interests have been acquired in accordance with current State/Federal rules and regulations covering the acquisition of real property.

This is to certify that all project rights of way is currently available in accordance with the project right-of-way plans.

It is further certified that there were no individuals or families displaced by this project. Therefore the provisions of 49 CFR Part 24 is not applicable to the project.

There are no improvements to be removed or demolished as part of this project.

REAL ESTATE SECTION

Robert Cunningham
Assistant Director Transportation Solutions
Right of Way

June 20, 2013



STATE OF DELAWARE
DEPARTMENT OF TRANSPORTATION
800 BAY ROAD
P.O. Box 778
DOVER, DELAWARE 19903

SHAILEN P. BHATT
SECRETARY

February 8, 2013

ENVIRONMENTAL REQUIREMENTS

FOR

State Contract No. T201380203

Federal Aid No.: None

Contract Title: Christiana High School Stormwater Management Retrofits

In accordance with the procedural provisions for implementing the National Environmental Policy Act of 1969, as amended, the referenced project has been processed through the Department's Environmental Review Procedures and has been classified as a Level D/ Class II Action.

Due to the nature of the proposed construction activities, permits are not required for this project. However, the following construction requirements and special provisions have been developed to minimize and mitigate impact to the surrounding environs. These requirements by DelDOT not specified within the contract, but listed below, are the responsibility of the contractor and are subject to risk of shut down at the contractor's expense if not followed.

GENERAL REQUIREMENTS:

1. All construction debris, excavated material, brush, rocks, and refuse incidental to such work shall be placed either on shore above the influence of flood waters or on some suitable dumping ground.
2. That effort shall be made to keep construction debris from entering adjacent waterways or wetlands. Any debris that enters those areas shall be removed immediately.
3. The disposal of trees, brush, and other debris in any stream corridor, wetland, surface water, or drainage area is prohibited.



BID PROPOSAL FORMS
CONTRACT T201380203.01
CANNOT BE USED FOR BIDDING

CONTRACT ID: T201380203.01 PROJECT(S): T201380203

All figures must be typewritten.

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
SECTION 0001 PROJECT ITEMS						
0010	202000 EXCAVATION AND EMBANKMENT	1849.000 CY				
0020	208000 EXCAVATION AND BACKFILLING FOR PIPE TRENCHES	37.000 CY				
0030	209009 BORROW, TYPE B	76.000 TON				
0040	211000 REMOVAL OF STRUCTURES AND OBSTRUCTIONS	LUMP	LUMP			
0050	251000 SILT FENCE	772.000 LF				
0060	251503 PERIMETER FILTER	94.000 LF				
0070	252000 INLET SEDIMENT CONTROL, DRAINAGE INLET	1.000 EACH				
0080	252001 INLET SEDIMENT CONTROL, CURB INLET	6.000 EACH				
0090	261000 TEMPORARY SLOPE DRAIN, 12"	43.000 LF				

CANNOT BE
 USED FOR
 BIDDING

CONTRACT ID: T201380203.01 PROJECT(S): T201380203

All figures must be typewritten.

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0100	271502 BIORETENTION FACILITIES	465.000 CY				
0110	302007 GRADED AGGREGATE BASE COURSE, TYPE B	18.000 CY				
0120	302008 GRADED AGGREGATE BASE COURSE, TYPE B, PATCHING	20.000 CY				
0130	302010 DELAWARE NO. 2 STONE	1.000 TON				
0140	302012 DELAWARE NO. 57 STONE	720.000 TON				
0150	302014 DELAWARE NO. 8 STONE	154.000 TON				
0160	401821 WMA, SUPERPAVE, TYPE C, 160 GYRATIONS, PG 64-22, PATCHING	10.000 TON				
0170	401822 WMA, SUPERPAVE, TYPE B, 160 GYRATIONS, PG 64-22, PATCHING	20.000 TON				
0180	402000 HOT-MIX BITUMINOUS CONCRETE AND/OR COLD-LAID BITUMINOUS CONCRETE (TRM)	135.000 TON				
0190	406001 WARM-MIX PATCHING	535.000 SYIN				

CANNOT BE USED FOR BIDDING

CONTRACT ID: T201380203.01 PROJECT(S): T201380203

All figures must be typewritten.

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0200	605544 OBSERVATION WELLS	36.000 LF				
0210	612020 REINFORCED CONCRETE PIPE, 12", CLASS IV	40.000 LF				
0220	612021 REINFORCED CONCRETE PIPE, 15", CLASS IV	98.000 LF				
0230	612501 PVC PIPE, 4"	104.000 LF				
0240	612502 PVC PIPE, 6"	54.000 LF				
0250	701010 PORTLAND CEMENT CONCRETE CURB, TYPE 1-8	104.000 LF				
0260	701505 P.C.C. PARKING BUMPER	39.000 EACH				
0270	701506 REMOVE AND RESET P.C.C. PARKING BUMPER	15.000 EACH				
0280	705002 P.C.C. SIDEWALK, 6"	1050.000 SF				
0290	708051 DRAINAGE INLET, 34" X 24"	2.000 EACH				

CANNOT BE USED FOR BIDDING

CONTRACT ID: T201380203.01 PROJECT(S): T201380203

All figures must be typewritten.

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0300	712535 CELLULAR CONFINEMENT SHOULDER PROTECTION	SF 625.000				
0310	713002 GEOTEXTILES, SEPARATION	SY 622.000				
0320	715000 PERFORATED PIPE UNDERDRAINS, 4"	LF 605.000				
0330	715002 PERFORATED PIPE UNDERDRAINS, 8"	LF 25.000				
0340	715514 GEOTEXTILE FILTER	SY 1550.000				
0350	720556 BOLLARD	EACH 29.000				
0360	732000 TOPSOIL, 4" DEPTH	SY 1945.000				
0370	734013 PERMANENT GRASS SEEDING, DRY GROUND	SY 1973.000				
0380	737523 PLANTINGS	LUMP	LUMP			
0390	741002 TREE REMOVAL 11" TO 14.9"	EACH 1.000				

CANNOT BE
 USED FOR
 BIDDING

CONTRACT ID: T201380203.01 PROJECT(S): T201380203

All figures must be typewritten.

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0400	743000 MAINTENANCE OF TRAFFIC	LUMP	LUMP			
0410	743050 FLAGGER, NEW CASTLE COUNTY, STATE	32.000 HOUR	50.66000		1621.12	
0420	748001 PAINTING OF WHITE OR YELLOW, 4" LINE	1251.000 LF				
0430	748003 PAINTING OF WHITE OR YELLOW, SYMBOL/LEGEND	30.000 SF				
0440	748530 REMOVAL OF PAVEMENT STRIPING	606.000 SF				
0450	758000 REMOVAL OF EXISTING PORTLAND CEMENT CONCRETE PAVEMENT, CURB, SIDEWALK, ETC.	285.000 SY				
0460	762001 SAW CUTTING, HOT MIX	2292.000 LF				
0470	762002 SAW CUTTING, CONCRETE, FULL DEPTH	16.000 LF				
0480	763000 INITIAL EXPENSE	LUMP	LUMP			
0490	763501 CONSTRUCTION ENGINEERING	LUMP	LUMP			

CANNOT BE
USED FOR
BIDDING

CONTRACT ID: T201380203.01 PROJECT(S): T201380203

All figures must be typewritten.

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0500	763573 SIGN	6.000				
		EACH				
	SECTION 0001 TOTAL					
	TOTAL BID					

CANNOT BE
USED FOR
BIDDING

CANNOT BE
BREAKOUT SHEETS

THE FOLLOWING SHEETS MUST BE COMPLETED AND RETURNED WITH THE PROPOSAL AT THE TIME OF BID. BREAKOUT SHEETS MUST BE COMPLETED REGARDLESS OF WHETHER BIDDING BY ELECTRONIC MEANS OR TYPEWRITTEN HARD COPY.

USED FOR
BIDDING

SECTION 1**BREAKOUT SHEET - 1
ITEM 737523 - PLANTING****CONTRACT NO. T201380203**

ITEM NO.	APPROX. QTY.	UOM	DESCRIPTION	UNIT PRICE	AMOUNT
1	704	SY	MULCHING	\$	\$
2	223	EA	RED CHOKEBERRY, 3'	\$	\$
3	224	EA	WINTERBERRY, 3'	\$	\$
4	61	EA	RED COLUMBINE, 1 QT.	\$	\$
5	61	EA	BEE BALM, 1 QT.	\$	\$
6	61	EA	MARSH BLAZING STAR, 1 QT.	\$	\$
7	64	EA	BLACK EYED SUSAN, 1 QT.	\$	\$
TOTAL ITEM 737523 - PLANTING \$					
(LUMP SUM BID PRICE FOR ITEM 737523)					

**CANNOT BE
USED FOR
BIDDING**

"ATTENTION"

TO BIDDERS

This Bid Proposal includes breakout sheets. The breakout sheets **MUST ACCOMPANY** the bid proposal at the time of bid.

CANNOT BE
USED FOR
BIDDING

CERTIFICATION

Contract No. T201380203.01

The undersigned bidder, _____, whose address is _____
and telephone number is _____
hereby certifies the following:

I/We have carefully examined the location of the proposed work, the proposed plans and specifications, and will be bound, upon award of this contract by the Department of Transportation, to execute in accordance with such award, a contract with necessary surety bond, of which contract this proposal and said plans and specifications shall be a part, to provide all necessary machinery, tools, labor and other means of construction, and to do all the work and to furnish all the materials necessary to perform and complete the said contract within the time and as required in accordance with the requirements of the Department of Transportation, and at the unit prices for the various items as listed on the preceding pages.

The foregoing quantities are considered to be approximate only and are given as the basis for comparison of bids. The Department of Transportation may increase or decrease the amount of any item or portion of the work as may be deemed necessary or expedient. Any such increase or decrease in the quantity for any item will not be regarded as a sufficient ground for an increase or decrease in the unit prices, nor in the time allowed for the completion of the work, except as provided in the contract.

Accompanying this proposal is a surety bond or a security of the bidder assigned to the Department of Transportation, for at least ten (10) percentum of total amount of the proposal, which deposit is to be forfeited as liquidated damages in case this proposal is accepted, and the undersigned shall fail to execute a contract with necessary bond, when required, for the performance of said contract with the Department of Transportation, under the conditions of this proposal, within twenty (20) days after date of official notice of the award of the contract as provided in the requirement and specifications hereto attached; otherwise said deposit is to be returned to the undersigned.

I/We are licensed, or have initiated the license application as required by Section 2502, Chapter 25, Title 30, of the Delaware Code.

By submission of this proposal, each bidder and each person signing on behalf of any bidder, certifies as to its own organization, under penalty of perjury, that to the best of each signer's knowledge and belief:

1. The prices in this proposal have been arrived at independently without collusion, consultation, communication, or Agreement with any other bidder or with any competitor for the purpose of restricting competition.
2. Unless required by law, the prices which have been quoted in this proposal have not been knowingly disclosed and will not knowingly be disclosed by the bidder, directly or indirectly, to any other bidder or competitor prior to the opening of proposals.
3. No attempt has been made or will be made by the bidder to induce any other person, partnership, or corporation to submit or not to submit a proposal for the purpose of restricting competition.

I/We acknowledge receipt and incorporation of addenda to this proposal as follows:

No.	Date								
-----	------	-----	------	-----	------	-----	------	-----	------

(BIDDERS MUST ACKNOWLEDGE RECEIPT OF ALL ADDENDA.)

Sealed and dated this _____ day of _____ in the year of our Lord two thousand and _____
(20__).

Name of Bidder (Organization)

Corporate
Seal

By:

Authorized Signature

Attest _____

Title

SWORN TO AND SUBSCRIBED BEFORE ME this ____ day of _____, 20 ____.

Notary
Seal

Notary

BID BOND

TO ACCOMPANY PROPOSAL
(Not necessary if security is used)

KNOW ALL MEN BY THESE PRESENTS That: _____
of _____ in the County of _____ and State of _____ as **Principal**, and
_____ of _____ in the County of _____ and
State of _____ as **Surety**, legally authorized to do business in the State of Delaware ("**State**"), are held
and firmly unto the **State** in the sum of _____ Dollars
(\$ _____), or _____ percent not to exceed _____ Dollars
(\$ _____) of amount of bid on Contract No. T201380203.01, to be paid to the **State** for the use
and benefit of its Department of Transportation ("**DeIDOT**") for which payment well and truly to be made,
we do bind ourselves, our and each of our heirs, executors, administrators, and successors, jointly and
severally for and in the whole firmly by these presents.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH That if the above bounden **Principal**
who has submitted to the **DeIDOT** a certain proposal to enter into this contract for the furnishing of certain
materiel and/or services within the **State**, shall be awarded this Contract, and if said **Principal** shall well and
truly enter into and execute this Contract as may be required by the terms of this Contract and approved by
the **DeIDOT**, this Contract to be entered into within twenty days after the date of official notice of the award
thereof in accordance with the terms of said proposal, then this obligation shall be void or else to be and
remain in full force and virtue.

Sealed with _____ seal and dated this _____ day of _____ in the year of our Lord two thousand and
_____ (20__).

SEALED, AND DELIVERED IN THE
presence of

Name of Bidder (Organization)

Corporate
Seal

By: _____
Authorized Signature

Attest _____

Title

Name of **Surety**

Witness: _____

By: _____

Title

