

STATE OF DELAWARE

This Copy is for information only.
You must purchase the Proposal
in order to submit a Bid.



DEPARTMENT OF TRANSPORTATION

BID PROPOSAL

for

CONTRACT T201406802.02

FOG SEAL AND SAND SEAL, STATEWIDE, FY 2014

KENT COUNTY

Advertisement Date: July 21, 2014

Completion Date 365 Calendar Days

SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION
DELAWARE DEPARTMENT OF TRANSPORTATION
AUGUST 2001

Bids will be received in the Bidder's Room (B1.11.01), Transportation Administration Center, 800 Bay Road,

Dover, Delaware until 2:00 P.M. local time August 12, 2014

**FOG SEAL AND SAND SEAL, STATEWIDE, FY 2014
KENT COUNTY**

GENERAL DESCRIPTION

LOCATION

These improvements are located in KENT County more specifically shown on the Location Map(s) of the enclosed Plans.

DESCRIPTION

The improvements consist of furnishing all materials for FOG SEAL AND SAND SEAL, STATEWIDE, FY 2014, and other incidental construction in accordance with the location, notes and details shown on the plans and as directed by the Engineer.

COMPLETION DATE

All work on this contract must be complete within 365 Calendar Days .

It is the Department's intent to issue a Notice to Proceed such that work starts on or about September 15, 2014

ELECTRONIC BIDDING

This project incorporates a newer version of the electronic bidding system, Expedite 5.9a. Bidders wishing to use the electronic bidding option will find the installation file on the plan holders bid file disk. The installation file and instructions are also available at: http://www.deldot.gov/information/business/bids/const_proj_bid_info.shtml.



PROSPECTIVE BIDDERS NOTES:

1. No retainage will be withheld on this contract.
2. The Department has adopted an External Complaint Procedure. The procedure can be viewed on our website at; <http://www.deldot.gov/information/business/>, or you may request a copy by calling (302) 760-2555.
3. Make note of the new version of Electronic Bidding software as noted above.
4. BIDDERS MUST REQUEST A CD OF THE OFFICIAL PLANS AND SPECIFICATIONS FROM THE DEPARTMENT IN ORDER TO SUBMIT A BID.
5. Please note the Special Provision titled **Changes to Project Documents During Advertisement**. The Department is using an alternative method of providing bid documents for this contract.

**STATE OF DELAWARE
CONSTRUCTION ITEMS UNITS OF MEASURE**

English Code	English Description	Multiply By	Metric Code	Metric Description	Suggested CEC Metric Code
ACRE	Acre	0.4047	ha	Hectare	HECTARE
BAG	Bag	N/A	Bag	Bag	BAG
C.F.	Cubic Foot	0.02832	m ³	Cubic Meter	M3
C.Y.	Cubic Yard	0.7646	m ³	Cubic Meter	M3
EA-DY	Each Day	N/A	EA-DY	Each Day	EA-DY
EA-MO	Each Month	N/A	EA-MO	Each Month	EA-MO
EA/NT	Each Night	N/A	EA-NT	Each Night	EA/NT
EACH	Each	N/A	EA	Each	EACH
GAL	Gallon	3.785	L	Liter	L
HOUR	Hour	N/A	h	Hour	HOUR
INCH	Inch	25.4	mm	Millimeter	MM
L.F.	Linear Foot	0.3048	m	Linear Meter	L.M.
L.S.	Lump Sum	N/A	L.S.	Lump Sum	L.S.
LA-MI	Lane Mile	1.609	LA-km	Lane-Kilometer	LA-KM
LB	Pound	0.4536	kg	Kilogram	KG
MFBM	Thousand Feet of Board Measure	2.3597	m ³	Cubic Meter	M3
MGAL	Thousand Gallons	3.785	kL	Kiloliter	KL
MILE	Mile	1.609	km	Kilometer	KM
S.F.	Square Foot	0.0929	m ²	Square Meter	M2
S.Y.	Square Yard	0.8361	m ²	Square Meter	M2
SY-IN	Square Yard-Inch	0.8495	m ² -25 mm	Square Meter-25 Millimeter	M2-25 MM
TON	Ton	.9072	t	Metric Ton (1000kg)	TON
N.A.*	Kip	4.448	kN	Kilonewton	N.A.*
N.A.*	Thousand Pounds per Square Inch	6.895	MPa	Megapascal	N.A.*

*Not used for units of measurement for payment.

TABLE OF CONTENTS

GENERAL DESCRIPTION..... i
 LOCATION..... i
 DESCRIPTION..... i
 COMPLETION DATE..... i
 PROSPECTIVE BIDDERS NOTES..... i
 CONSTRUCTION ITEMS UNITS OF MEASURE..... ii

GENERAL NOTICES..... 1
 SPECIFICATIONS..... 1
 CLARIFICATIONS..... 1
 ATTESTING TO NON-COLLUSION..... 1
 QUANTITIES..... 1
 PREFERENCE FOR DELAWARE LABOR..... 1
 EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS..... 1
 TAX CLEARANCE..... 2
 LICENSE..... 2
 DIFFERING SITE CONDITIONS..... 2

PREVAILING WAGES..... 3
 STATE WAGE RATES..... 5

SUPPLEMENTAL SPECIFICATIONS..... 6

SPECIAL PROVISIONS..... 7
 CHANGES TO PROJECT DOCUMENTS DURING ADVERTISEMENT..... 8
 CONSTRUCTION ITEM NUMBERS..... 9
 401502 - ASPHALT CEMENT COST ADJUSTMENT..... 10
 401756 - RUBBER MODIFIED FOG SEAL..... 11
 401758 - COAL SLAG..... 15
 406507 - CRACK SEALING..... 17
 748502 - RAISED/RECESSED PAVEMENT MARKER..... 19
 748548 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, WHITE/YELLOW, 5"
 20
 748553 - PREFORMED RETROREFLECTIVE THERMOPLASTIC PAVEMENT MARKINGS,
 BIKE SYMBOL..... 30

UTILITY STATEMENT..... 34

RIGHT OF WAY CERTIFICATE..... 36

ENVIRONMENTAL STATEMENT..... 37

BID PROPOSAL FORMS..... 38

CERTIFICATION..... 42

BID BOND..... 44

GENERAL NOTICES

SPECIFICATIONS:

The specifications entitled "Delaware Standard Specifications, for Road and Bridge Construction, August, 2001", hereinafter referred to as the Standard Specifications, Supplemental Specifications, the Special Provisions, notes on the Plans, this Bid Proposal, and any addenda thereto shall govern the work to be performed under this contract.

CLARIFICATIONS:

Under any Section or Item included in the Contract, the Contractor shall be aware that when requirements, responsibilities, and furnishing of materials are outlined in the details and notes on the Plans and in the paragraphs preceding the "Basis of Payment" paragraph in the Standard Specifications or Special Provisions, no interpretation shall be made that such stipulations are excluded because reiteration is not made in the "Basis of Payment" paragraph.

ATTESTING TO NON-COLLUSION:

The Department requires as a condition precedent to acceptance of bids a sworn statement executed by, or on behalf of, the person, firm, association, or corporation to whom such contract is to be awarded, certifying that such person, firm, association, or corporation has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with such contract. The form for this sworn statement is included in the proposal and must be properly executed in order to have the bid considered.

QUANTITIES:

The quantities shown are for comparison of bids only. The Department may increase or decrease any quantity or quantities without penalty or change in the bid price.

PREFERENCE FOR DELAWARE LABOR:

Delaware Code, Title 29, Chapter 69, Section 6962, Paragraph (d), Subsection (4)b

"In the construction of all public works for the State or any political subdivision thereof, or by firms contracting with the State or any political subdivision thereof, preference in employment of laborers, workmen or mechanics shall be given to bona fide legal citizens of the State who have established citizenship by residence of at least 90 days in the State. Each public works contract for the construction of public works for the State or any political subdivision thereof shall contain a stipulation that any person, company or corporation who violates this section shall pay a penalty to the Secretary of Finance equal to the amount of compensation paid to any person in violation of this section."

EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS:

Delaware Code, Title 29, Chapter 69, Section 6962, Paragraph (d), Subsection (7)

"a. As a condition of the awarding of any contract for public works financed in whole or in part by State appropriation, such contracts shall include the following provisions:

During the performance of this contract, the contractor agrees as follows:

1. The contractor will not discriminate against any employee or applicant for employment because of race, creed, color, sex or national origin. The contractor will take positive steps to ensure that applicants are employed, and that employees are treated during employment, without regard to their race, creed, color, sex or national origin. Such action shall include, but not be limited to, the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship. The contractor agrees

to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.

2. The contractor will, in all solicitations or advertisements for employees placed by or on behalf of the contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, color, sex or national origin.'

TAX CLEARANCE:

As payments to each vendor or contractor aggregate \$2,000, the Division of Accounting will report such vendor or contractor to the Division of Revenue, who will then check the vendor or contractor's compliance with tax requirements and take such further action as may be necessary to insure compliance.

LICENSE:

A person desiring to engage in business in this State as a contractor shall obtain a license upon making application to the Division of Revenue. Proof of said license compliance to be made prior to, or in conjunction with, the execution of a contract to which he has been named.

DIFFERING SITE CONDITIONS,

SUSPENSIONS OF WORK and SIGNIFICANT CHANGES IN THE CHARACTER OF WORK:

Differing site conditions: During the progress of the work, if subsurface or latent physical conditions are encountered at the site differing materially from those indicated in the contract or if unknown physical conditions of an unusual nature, differing materially from those ordinarily encountered and generally recognized as inherent in the work provided for in the contract are encountered at the site, the party discovering such conditions shall promptly notify the other party in writing of the specific differing conditions before they are disturbed and before the affected work is performed.

Upon written notification, the engineer will investigate the conditions, and if he/she determines that the conditions materially differ and cause an increase or decrease in the cost or time required for the performance of any work under the contract, an adjustment, excluding loss of anticipated profits, will be made and the contract modified in writing accordingly. The engineer will notify the contractor of his/her determination whether or not an adjustment of the contract is warranted.

No contract adjustment which results in a benefit to the contractor will be allowed unless the contractor has provided the required written notice.

No contract adjustment will be allowed under their clause for any effects caused on unchanged work.

Suspensions of work ordered by the engineer: If the performance of all or any portion of the work is suspended or delayed by the engineer in writing for an unreasonable period of time (not originally anticipated, customary or inherent to the construction industry) and the contractor believes that additional compensation and/or contract time is due as a result of such suspension or delay, the contractor shall submit to the engineer in writing a request for adjustment within 7 calendar days of receipt of the notice to resume work. The request shall set forth the reasons and support for such adjustment.

Upon receipt, the engineer will evaluate the contractor's request. If the engineer agrees that the cost and/or time required for the performance of the contract has increased as a result of such suspension and the suspension was caused by conditions beyond the control of and not the fault of the contractor, its suppliers, or subcontractors at any approved tier, and not caused by weather, the engineer will make an adjustment (excluding profit) and modify the contract in writing accordingly. The engineer will notify the contractor of his/her determination whether or not an adjustment of the contract is warranted.

No contract adjustment will be allowed unless the contractor has submitted the request for adjustment within the time prescribed.

No contract adjustment will be allowed under this clause to the extent that performance would have been suspended or delayed by any other cause, or for which an adjustment is provided for or excluded under any other term or condition of this contract.

Significant changes in the character of work: The engineer reserves the right to make, in writing, at any time during the work, such changes in quantities and such alterations in the work as are necessary to satisfactorily complete the project. Such changes in quantities and alterations shall not invalidate the contract nor release the surety, and the contractor agrees to perform the work as altered.

If the alterations or changes in quantities significantly change the character of the work under the contract, whether or not changed by any such different quantities or alterations, an adjustment, excluding loss of anticipated profits, will be made to the contract. The basis for the adjustment shall be agreed upon prior to the performance of the work. If a basis cannot be agreed upon, then an adjustment will be made either for or against the contractor in such amount as the engineer may determine to be fair and equitable.

The term "significant change" shall be construed to apply only to the following circumstances:

- (A) When the character of the work as altered differs materially in kind or nature from that involved or included in the original proposed construction or
- (B) When a major item of work, as defined elsewhere in the contract, is increased in excess of 125 percent or decreased below 75 percent of the original contract quantity. Any allowance for an increase in quantity shall apply only to that portion in excess of 125 percent of original contract item quantity, or in case of a decrease below 75 percent, to the actual amount of work performed.

PREVAILING WAGES

Included in this proposal are the minimum wages to be paid various classes of laborers and mechanics as determined by the Department of Labor of the State of Delaware in accordance with Title 29 Del.C. §6960, relating to wages and the regulations implementing that Section.

REQUIREMENT BY DEPARTMENT OF LABOR FOR SWORN PAYROLL INFORMATION

Title 29 Del.C. §6960 stipulates;

(b) Every contract based upon these specifications shall contain a stipulation that the employer shall pay all mechanics and laborers employed directly upon the site of the work, unconditionally and not less often than once a week and without subsequent deduction or rebate on any account, the full amounts accrued at time of payment, computed at wage rates not less than those stated in the specifications, regardless of any contractual relationship which may be alleged to exist between the employer and such laborers and mechanics. The specifications shall further stipulate that the scale of wages to be paid shall be posted by the employer in a prominent and easily accessible place at the site of the work, and that there may be withheld from the employer so much of accrued payments as may be considered necessary by the Department of Labor to pay to laborers and mechanics employed by the employer the difference between the rates of wages required by the contract to be paid laborers and mechanics on the work and rates of wages received by such laborers and mechanics to be remitted to the Department of Labor for distribution upon resolution of any claims.

(c) Every contract based upon these specifications shall contain a stipulation that sworn payroll information, as required by the Department of Labor, be furnished weekly. The Department of Labor shall keep and maintain the sworn payroll information for a period of 6 months from the last day of the work week covered by the payroll.

Bidders are specifically directed to note the Department of Labor's prevailing wage regulations implementing §6960 relating to the effective date of the wage rates, at Part VI., Section C., which in relevant part states:

"Public agencies (covered by the provisions of 29 Del.C. §6960) are required to use the rates which are in effect on the date of the publication of specifications for a given project. In the event that a contract is not executed within one hundred twenty (120) days from the date the specifications were published, the rates in effect at the time of the execution of the contract shall be the applicable rates for the project."

Contractor may contact:

Department of Labor
Division of Industrial Affairs
4425 No. Market Street
Wilmington, DE 19802
Telephone (302) 761-8200

STATE OF DELAWARE
DEPARTMENT OF LABOR
DIVISION OF INDUSTRIAL AFFAIRS
OFFICE OF LABOR LAW ENFORCEMENT
PHONE: (302) 451-3423

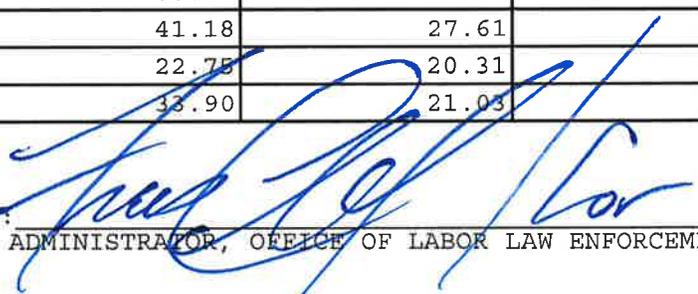
Mailing Address:
225 CORPORATE BOULEVARD
SUITE 104
NEWARK, DE 19702

Located at:
225 CORPORATE BOULEVARD
SUITE 104
NEWARK, DE 19702

PREVAILING WAGES FOR HIGHWAY CONSTRUCTION EFFECTIVE MARCH 14, 2014

CLASSIFICATION	NEW CASTLE	KENT	SUSSEX
BRICKLAYERS	48.08	48.08	14.51
CARPENTERS	43.15	50.91	40.47
CEMENT FINISHERS	30.88	26.13	26.33
ELECTRICAL LINE WORKERS	22.50	22.50	21.25
ELECTRICIANS	62.10	62.10	62.10
IRON WORKERS	42.20	23.87	25.35
LABORERS	33.01	38.68	37.97
MILLWRIGHTS	16.11	15.63	13.49
PAINTERS	60.64	60.64	60.64
PILEDRIVERS	66.42	23.75	26.95
POWER EQUIPMENT OPERATORS	41.18	27.61	28.47
SHEET METAL WORKERS	22.75	20.31	18.40
TRUCK DRIVERS	33.90	21.03	22.19

CERTIFIED: 7/10/14

BY: 

ADMINISTRATOR, OFFICE OF LABOR LAW ENFORCEMENT

NOTE: THESE RATES ARE PROMULGATED AND ENFORCED PURSUANT TO THE PREVAILING WAGE REGULATIONS ADOPTED BY THE DEPARTMENT OF LABOR ON APRIL 3, 1992.

CLASSIFICATIONS OF WORKERS ARE DETERMINED BY THE DEPARTMENT OF LABOR. FOR ASSISTANCE IN CLASSIFYING WORKERS, OR FOR A COPY OF THE REGULATIONS OR CLASSIFICATIONS, PHONE (302) 451-3423.

NON-REGISTERED APPRENTICES MUST BE PAID THE MECHANIC'S RATE.

PROJECT: T201406802.02 Fog Seal and Sand Seal, Multiple Counties

SUPPLEMENTAL SPECIFICATIONS TO THE AUGUST 2001 STANDARD SPECIFICATIONS

**EFFECTIVE AS OF THE ADVERTISEMENT
DATE OF THIS PROPOSAL
AND INCLUDED BY REFERENCE**

**The Supplemental Specifications can be viewed and printed from
the Department's Website.**

To access the Website;

- in your internet browser, enter; <http://www.deldot.gov>
- on the left side of the page under 'INFORMATION', Click; 'Publications'
- scroll down under 'MANUALS' and Click; "Standard Specifications 2001"

The full Website Link is;

http://www.deldot.gov/information/pubs_forms/manuals/standard_specifications/index.shtml

Printed copies of the Supplemental Specifications are available upon request. A printed copy of the above referenced Supplemental Specifications will be included in the final contract documents upon award.

The Contractor shall make himself aware of these revisions and corrections (Supplemental Specifications), and apply them to the applicable item(s) of this contract.

SPECIAL PROVISIONS

CHANGES TO PROJECT DOCUMENTS DURING ADVERTISEMENT

1. PRINTED PLANS AND SPECIFICATIONS NOT AVAILABLE FROM DELDOT.

The Department is not providing printed plans or specifications for this project. Bidders must contact the Department in order to receive a CD that contains all bid documents. Bidders are able to use the CD to print the plans and specifications, or have them printed from the Website. While the plans and specifications are available on-line at DeLDOT's Website, the Website bid documents are not authorized for submitting bids, and the Website documents are marked as such. To receive required bid Documents on a CD, contact:

Contract Administration
Delaware Department of Transportation
P.O. Box 778, Dover, DE 19903
e-mail: dot-ask@state.de.us
Phone: (302) 760-2030
FAX: (302) 739-2254

The Department is providing a printed set of plans and specifications available for viewing in the Bidder's Room, Transportation Administration Center, 800 Bay Road, Dover, Delaware, Monday through Friday excluding holidays from 8:00A.M. through 4:15 P.M..

2. QUESTIONS AND ANSWERS

All questions pertaining to this project are to be submitted to the following e-mail address:

dot-ask@state.de.us

Questions and Answers will be dated and posted periodically on Delaware's Bid Solicitation Directory Website located at: <http://www.bids.delaware.gov/>

The final Questions and Answers will be posted no later than the end of the day, two working days prior to the bid date.

All Questions and Answers posted by the Department on the above Website are included by reference and become part of the contract documents. The awarded bidder will receive a hard copy of the final posted Questions and Answers.

Potential bidders that do not have access to the internet may contact Jim Hoagland, Contract Services Administrator, by telephone at (302) 760-2036 to make other arrangements.

NOTE: There is space provided on the CERTIFICATION page to insert the Posted Date of the final Questions and Answers. The Final Posted Date is the latest Posted Date of the Questions and Answers one day prior to Bid Date. This final Posted Date must be submitted on the Certification page.

3. ADDENDA

The Department is not providing printed Addendums, if issued, for this project. **All addendums will be posted on the Department's Website, and are included by reference and become part of the contract documents.** It is the responsibility of the bidder to check the Website as needed. If there are Addendums issued, the final Addendum will be posted no later than the end of the day, two working days prior to the bid date.

NOTE: There is space provided on the CERTIFICATION page to insert each issued Addendum and the date you acknowledge receipt of the addendum. Each Addendum number and date acknowledged must be submitted on the Certification page.

CONSTRUCTION ITEM NUMBERS

All construction pay items are assigned a six (6) digit number, shown as Item Number on the Plans and/or in the Special Provisions, and shall be interpreted in accordance with the following:

Standard Item Number:

The first three digits of the construction item numbers indicates the Section number as described in the Standard Specifications, and all applicable requirements of the Section shall remain effective unless otherwise modified by the Special Provisions. The last three digits of the construction item identifies the item by sequential number under that Section. Sequential numbers for all items covered under Standard Specifications range from 000 to 499. A comprehensive list of construction item numbers begins on page 421 of the Standard Specifications. Additions to this list will be made as required.

Special Provisions Item Number:

The first three digits of the construction items, covered under Special Provisions, indicates the applicable Section number of the Standard Specifications, and shall be governed fully by the requirements of the Special Provisions. The last three digit of the items covered under Special Provisions identifies the item by sequential number. Sequential numbers for Special Provision items, range from 500 to 999.

Examples

Standard Item Number - 202000 Excavation and Embankment

202 Indicates Section Number

000 Indicates Sequential Number

Special Provision Item Number - 202500 Grading and Reshaping Roadway

202 Indicates Section Number

500 Indicates Sequential Number

401502 - ASPHALT CEMENT COST ADJUSTMENT

For Sections 304, 401, 402, 403, 404, and 405, payments to the Contractor shall be adjusted to reflect increases or decreases in the Delaware Posted Asphalt Cement Price when compared to the Project Asphalt Cement Base Price, as defined in these Special Provisions.

The Delaware Posted Asphalt Cement Price will be issued monthly by the Department and will be the industry posted price for Asphalt Cement, F.O.B. Philadelphia, Pennsylvania.

The Project Asphalt Cement Base Price will be the anticipated Delaware Posted Asphalt Cement Price expected to be in effect at the time of receipt of bids.

All deviations of the Delaware Posted Asphalt Cement Price from the Project Asphalt Cement Base Price are eligible for cost adjustment. No minimum increases or decreases or corresponding percentages are required to qualify for cost adjustment.

Actual quantity of asphalt cement qualifying for any Asphalt Cement Cost Adjustment will be computed on the basis of weight tickets and asphalt percentage from the approved job mix formula.

For Recycled Hot-Mix the asphalt percentage eligible for cost adjustment shall be only the new asphalt cement added to the mix.

There shall be no separate payment per ton (metric ton) cost of asphalt cement. That cost shall be included in the various unit prices bid per ton (metric ton) for those bid items that contain asphalt cement (mentioned above).

The Asphalt cement cost adjustment will be calculated on grade PG 64-22 asphalt regardless of the actual grade of asphalt used. The Project Asphalt Cement Base Price for the project will be \$581.67 per ton (\$641.18 per metric ton).

If the Contractor exceeds the authorized allotted completion time, the price of asphalt cement on the last authorized allotted work day, shall be the prices used for cost adjustment during the time liquidated damages are assessed. However, if the industry posted price for asphalt cement goes down, the asphalt-cement cost shall be adjusted downward accordingly.

NOTE

Application of Asphalt Cement Cost Adjustment requirements as indicated above shall apply only to those contracts involving items related to bituminous base and pavements, and with bitumen, having a total of 1,000 tons (1,000 metric tons) or more of hot-mix bid quantity in case of Sections 401, 402 and 403; and 15,000 gallons (60 000 liters) or more in case of Sections 304, 404 and 405.

401756 - RUBBER MODIFIED FOG SEAL

Description:

This work consists of preparing the surface, furnishing and applying Rubber Modified Fog Seal.

Materials:

Rubberized asphalt emulsion used for fog seal shall be manufactured with terminal blended rubber. The distillation residue of the emulsion shall contain a minimum of 10.0 rubber by weight, as determined by an analytical method approved by the Department. Residue by evaporation shall be greater than 33.0 percent. The emulsion supplier shall furnish the Department samples of the base asphalt (including rubber) used in the finished emulsion. A Certificate of Analysis shall be submitted for each lot of asphalt for approval.

In addition, the rubberized emulsion used for fog seal shall comply with the following:

<u>TEST</u>	<u>SPECIFICATION</u>	
Rubber content, %	of Residue	10% minimum
Uniformity Product shall be homogenous and show no separation or coagulation that cannot be overcome by moderate stirring.	ASTM D 2939.05	PASS
Viscosity, Krieb Unit (KU)	ASTM D 562	35 to 85
Specific Gravity	ASTM D 2939.07	Report
Residue by Evaporation	ASTM D 2939.08	>33.0%
Flash Point, °F (Residue)	ASTM D 93	>550
Resistance to Heat No sagging or slippage of film beyond the initial reference line after 212°F exposure for 2 hrs.	ASTM D 2939.14	PASS*
Resistance to Water No blistering or re-emulsification after 24 hr submersion in water.	ASTM D 2939.15	PASS*
Wet Flow No flow beyond initial reference line.	ASTM D 2939.19	PASS*
Direct Flame Test No continued combustion or slippage and run-down.	ASTM D 2939.20	PASS*
Wet Film Continuity A uniformly homogeneous consistency.	ASTM D 2939.22	PASS*
Resistance to Kerosene Report any evidence of leakage of kerosene, loss of adhesion and discoloration of tile.	ASTM D 2939.25	PASS*
Wet Track Abrasion Test 1/16 wet membrane application, 140 degree 24 hour cure, 1 hour water soak, 1500 gm rubber hose 5 minute scrub. Calculated weight loss, percentage of original volume.	ISSA (TB-100)	<1.5%
Accelerated Weathering Test No cracking, chipping, surface distortion or loss of adhesion. No color fading or lightening.	ASTM G 154	PASS @ 1,000 hours
1000 hours UVA-340 lamp, 0.77 W/m ² (v1.0 calibration), 8 hours UV light @ 50°C, 5 min. spray, 3:55 hours condensation @ 50°C.		

* When testing the Rubber Asphalt Emulsion a ceramic tile panel will be incorporated in place of the metal panels. The ceramic tile panel preparation will be in accordance with Test Methods D 2939-25.1.1 guidelines: *Unglazed ceramic tiles, white, nonvitreous, dust-pressed body with an absorption range of 10 to 18% (determined in accordance with Test Methods C 67) approximately 150mm by 150mm (6 by 6 inch) by 9.5 to 13mm (3/8 to 1/2 inch) in thickness to accommodate the mask.*

Surface Preparation:

The surface upon which the Rubber Modified Fog Seal is to be placed shall be cleaned thoroughly to the satisfaction of the Engineer. Surface preparation shall be completed by removing all vegetation prior to sweeping with a power broom followed by a final sweeping with a approved vacuum truck, or flushed with a water pump-unit to remove dust, dirt, and debris. The pavement surface must be clean and dry before applying the fog seal. If flushing is required, it should be completed 24 hours prior to the application of the fog seal to allow for adequate drying. The preparation shall be done just prior to the application of the fog seal and be approved by the Engineer.

Equipment:

Distributors. The distributors used shall be capable of uniformly applying the bituminous material in liquid form. Devices to control the pressure, volume, and temperature shall be provided. Each distributor shall have an approved calibration chart, be equipped with an approved sampling device, and conform to the following:

- a. *Pressure.* The pressure shall be supplied by a positive displacement pump or air compressor. The pressure shall be uniform throughout the entire width of spray. If pressure is supplied by an air compressor, automatic controls must be provided to maintain sufficient and even pressure throughout the application of an entire load.
- b. *Temperature.* The distributor shall be equipped with a heating system that applies heat uniformly across the width of the tank. Provisions shall be made for circulating or agitating the material whenever necessary while heating. The distributor shall be equipped with a thermometer marked in degrees Fahrenheit (Celsius) of sufficient range to determine the actual temperature of the material.
- c. *Tachometer.* All distributors shall be provided with an approved tachometer recording feet (meters) per minute with a tabulation of feet (meters) per load with adjustments. Each load tabulation shall start at zero. There shall also be a totaling tabulation of this instrument.
- d. *Volume.* A tachometer shall give correct readings of the speed, and the volumetric efficiency of the distributor shall ensure the correct volume at various speeds. Tests shall be required to prove the volumetric efficiency of the distributor at various speeds as directed by the Engineer.
- e. *Circulating System.* All pump distributors shall be equipped with a circulating system designed to maintain a homogenous liquid while circulating in the distributor tank. This circulating system shall also be arranged to circulate the material in the tank truck before application.

Air distributors shall be equipped with a device for agitating the bituminous material in the tank trucks when necessary.
- f. *Tests.* Necessary tests shall be made to determine the accuracy of all pressure gauges, tachometers, and pump efficiencies. The tests shall be made by the Contractor when and as required by the Engineer.
- g. *Spray Bars.* Each distributor shall be equipped with spray bars capable of applying material uniformly throughout the entire length of the spray bars when they are extended. Spray bar extensions shall be provided for applying up to a 12' (7.3 m) width in one operation. Spray bars shall be equipped with a cleaning device and a shut-off valve to prevent dribbling, dripping, or streaking.

- h. *Tank Capacity Gauge.* A float or other approved type tank capacity gauge shall be furnished to indicate the volume in the tank in not less than 25 gal (100 L) units. The gauge shall have adjustments for correction.

Tanks shall have a minimum capacity of 750 gal (2800 L).

The rate of application of the distributor shall be calibrated by an approved method determined by the Engineer.

If the Engineer deems that the equipment applying the material is inadequate or fails to comply with all regulations, the Engineer will order the equipment to be removed from the job and require that another unit be placed on the work.

Application of Rubber Modified Fog Seal Material:

The Rubber Modified Fog Seal shall be applied in one application at the rates specified using the pressure distributor for the full width of the sealing operation, unless otherwise directed. Apply at the temperature that is recommended by the manufacture.

The nozzles of the spray bar shall be kept clean at all times. If one or more nozzles become blocked during the application of bituminous materials, the distributor shall be stopped immediately, and the nozzles shall be cleaned. The streaked areas shall be made uniform using a hand hose or other approved methods.

If the Contractor is unable to keep the application uniform, the operation shall be discontinued until a more experienced operator or a better distributor, or both, can be provided; or, the Contractor shall take such other precautions as may be necessary to keep the application within specified limits.

When applying bituminous materials adjacent to structures or curbs, the Contractor shall furnish and use effective means of protecting the structures or curbs from discoloration.

Construction Methods:

The Rubber Modified Fog Seal shall be applied at a rate of 0.01 to 0.17 gal/yd² at ambient temperature. The application rate appropriate for the surface being sealed shall be determined by the Engineer. This rate will be determined by test strip. Apply the Rubber Modified Fog Seal when the air and surface temperature is 60°F and above. Measure the air and surface temperature in the shade away from artificial heat. The application shall not begin if rain or high winds are eminent. The Engineer will determine when weather conditions are suitable for application. The fog seal should be a thin, uniform coating sufficient to seal the underlying pavement. The Rubber Modified Fog Seal shall be applied using pressurized distributing equipment with a spray bar or other approved distribution system. During the application of the fog seal, care shall be taken to prevent splattering of adjacent pavement, curb and gutter and structures.

Method of Measurement:

The quantity of Rubber Modified Fog Seal will be measured as the actual number of gallons of Rubber Modified Fog Seal applied. The quantity will be determined by any or all of the following methods and should be verified for accuracy by computations based on field measurements taken on and along the completed finished surfaces. Multiple layers will not be measured separately.

1. **Truck Measurement:** If bituminous materials are delivered to the Project in tank trucks, distributor tanks, or drums, the Contractor shall not remove any bituminous material from the transporting vehicle or container until necessary measurements have been made, nor shall the transporting vehicle or container be released until final outage has been measured. If weighing is not convenient, the Contractor shall furnish the Engineer with a certified chart showing the dimensions and volume of each container together with a gauge or calibrated measuring rod which will permit the volume of the material to be determined by vertical measurement.
2. **Metering:** The volume may be determined by metering, in which case the metering device used and the method of using it shall be subject to the approval of the Engineer.

3. **Time of Deliveries:** The arrival and departure of vehicles delivering bituminous materials to the Project site shall be so scheduled that the Engineer is afforded proper time for the measurements of delivered volume and final outage. The Engineer will make the necessary measurements only during the Contractor's normal daily working hours.

Basis of Payment:

The quantity of the fog seal will be paid for at the Contract unit price per gallon of Rubber Modified Fog Seal. Price and payment will constitute full compensation for preparing the surface, mobilizing and furnishing all equipment, materials, and labor; placing the material; and for all labor, equipment, tools and incidentals necessary to complete the work.

5/5/14

401758 - COAL SLAG

Description:

This work consists of preparing the surface, furnishing and applying Coal Slag on Rubber Modified Asphalt.

Materials:

Aggregate

The sand product mentioned here on shall be coal slag abrasives meeting the following requirements:

<u>Property</u>	<u>Requirement</u>
Particle Shape	Angular, Sharp
Hardness	>6 on the Moh's scale
Solubility	Insoluble
Color	Black
Particle Size	Should be approved by the department

Equipment:

Sand Spreader. The sand spreader used shall be capable of uniformly applying the sand product to the liquid asphalt. Devices to control the volume and application rate shall be provided. Each spreader shall conform to the following:

- a. *Variable Speed Controller (VSC)*. All distributors shall be provided with an approved VSC applying feet (meters) per minute with a tabulation of feet (meters) per load with adjustments. Each load tabulation shall start at zero. There shall also be a totaling tabulation by the contractor.
- b. *Rate Control System*. All sand spreaders shall be equipped with an auger designed to maintain an even broadcast of sand product
- c. *Tests*. Necessary tests shall be made to determine the accuracy of all VSC and auger efficiencies. The tests shall be made by the Contractor when and as required by the Engineer.

Hopper shall have a minimum capacity of 11 cu ft (0.311 cu meter).

The rate of application of the sand spreader shall be calibrated by an approved method determined by the Engineer.

If the Engineer deems that the equipment applying the material is inadequate or fails to comply with all regulations, the Engineer will order the equipment to be removed from the job and require that another unit be placed on the work.

Application:

The Coal Slag friction material shall be applied immediately to coincide with application of the Rubberized Asphalt Emulsion such that the friction material is imbedded before the emulsion begins to break. Application shall be accomplished using an approved broadcast spreader mounted on the rear of the emulsion distributor, and apply material evenly across the full width of the spray bar. The spreader unit must be done in such a manner as to prevent driving on the freshly applied Rubberized Asphalt Emulsion sealed areas. Contractor shall schedule this work so the Rubberized Asphalt Emulsion seal application and the spreading operation work as a cohesive unit with the spreading from the rear of the emulsion distributor. Spreading will be done in a manner so as to prevent excess material from broadcasting onto adjacent pavement prior to the Rubberized Asphalt Emulsion seal being applied.

The Coal Slag shall be applied in one application at the rates specified using the VSC for the full width of the sealing operation, unless otherwise directed.

The spinner disk shall be kept clean at all times. Spreaders that spread a minimum of 30' are recommended. If spinner disk becomes blocked during the application of the sand product, the distributor shall be stopped immediately, and the spinner disk shall be cleaned.

If the Contractor is unable to keep the application uniform, the operation shall be discontinued until a more experienced operator or a better distributor, or both can be provided; or, the Contractor shall take such other precautions as may be necessary to keep the application within specified limits.

Construction Methods:

The application rate of the Coal Slag friction material shall be between 0.50 to 3.00 pounds per square yard. These rates will be verified by application of a test strip and approved by the Engineer. The Engineer will determine when weather conditions are suitable for application. The Coal Slag should be a uniform coating sufficient to cover the liquid asphalt. The Coal Slag shall be applied using sand product spreading equipment with a spinning disk or other approved distribution system.

Method of Measurement:

The quantity of Coal Slag will be measured as the actual number of pounds applied. The quantity will be determined by any or all of the following methods and should be verified for accuracy by computations based on field measurements taken on and along the completed finished surfaces. Multiple layers will not be measured separately.

Basis of Payment:

The quantity of the Coal slag used in sand seal shall be measured in pounds. Price and payment will constitute full compensation for preparing the surface, mobilizing and furnishing all equipment, materials, and labor; placing the material; and for all labor, equipment, tools and incidentals necessary to complete the work.

6/24/14

406507 - CRACK SEALING

Description:

The work covered by these specifications consists of furnishing all labor, equipment, and materials necessary to perform all operations in connection with the cleaning and sealing of construction joints and random cracks in bituminous concrete surfaces with hot poured asphaltic materials.

Materials:

The sealant shall consist of selected blends of paving grade asphalt and vulcanized granulated crumb rubber. During heating in the melting unit, the asphalt and rubber must react to form a flexible adhesive compound, which when properly applied will effectively seal cracks in either asphalt or concrete pavements. The mixture shall be a blend of paving grade asphalt cement, 21% +/- 2% (by weight of mixture) recycled/reclaimed crumb rubber as shown below and other ingredients necessary to meet the following requirements.

The material furnished under these specifications shall have been tested and found acceptable as determined by the qualification tests in accordance with the requirements under these specifications. A certified copy of the test results shall be submitted to the Materials & Research Laboratory to show that the material is duly qualified.

Physical Requirements:

The specification for asphalt rubber sealants after reaction at 350° F (177° C) for one (1) hour shall be as follows:

Test:

Penetration, Cone, 77° F (25° C); .004 in (1/10 mm), .33 lb (150 g), 5 sec	70 maximum
Softening Point, °F (°C)	150° F (65.6° C) minimum
Resilience, 77° F (25° C); %	30% minimum
Ductility, 39.2° F (4° C); in (cm)	2.8 in (7 cm) minimum
Viscosity at 350° F (177° C); lb/ft-sec (C Poise), ASTM D3236	26.8 - 167.7 lb/ft-s (40 - 250 C Poise)
Unit Weight	8.5 lbs/gal (1.0 kg/l)
Coverage; 1/2" x 1/2" (13 mm x 13 mm) crack	11.0 lbs per 100 ft. (5.0 kg per 30 m)

Mixture Requirements:

The pour point of the mixture shall be at least 20° F (-6.7° C) lower than the safe heating temperature, which is the maximum temperature to which the material mixture may be heated without exceeding the permitted flow.

Asphalt Compatibility:

Requirements of ASTM D3405 shall be met by the sealant as tested in accordance with ASTM D3407.

Safety Precautions:

Asphalt rubber sealants must be non-toxic and contain no carcinogenic materials.

Crumb Rubber:

The recycled/reclaimed crumb rubber used in mixture shall meet the following requirements:

- A. Shall be produced from an ambient grinding process (crushes, tears, grinds, and/or abrades the used rubber at or above ordinary room temperature) which produces rubber particles with a very ragged, sponge-like surface. Cryogenically ground rubbers are prohibited.
- B. Shall contain recycled, vulcanized crumb rubber and/or reclaimed (devulcanized) rubber.
- C. Shall contain no more than a trace of fabric.
- D. Shall be free of wire and other contaminating materials, except that up to 4% calcium carbonate or talc may be included to prevent the rubber particles from sticking together.
- E. Shall have no rubber particles greater than 1/4 inch (6.4 mm) in length.

In addition to the certified copy of the test results, the Contractor shall provide a sample, 2 lbs. (.91 kg) minimum, of the sealant to the Department's Materials and Research Section for approval.

Construction Methods:

The equipment used for heating and applying the sealant shall meet the requirements of the sealant manufacturer. The kettle shall be an oil-jacketed double wall kettle equipped with an agitator and a 2 inch (50 mm) hot asphalt pump. The equipment shall have a pump for circulating the transfer oil bath and thermometers in both the oil bath and melting chamber. The equipment used for application of the sealant material shall be equipped with a volumetric measuring device to measure the quantity of sealant material applied. The wand applicator shall utilize metal tips. Plastic tips will not be allowed.

The sealant material shall be heated as recommended by the manufacturer.

All construction and random cracks with a crack width greater than 1/4 inch (6.4 mm) are to be sealed in accordance to these specifications. All construction and random cracks with a crack width less than 1/4 inch (6.4 mm) are not to be sealed.

No crack sealant shall be applied in wet cracks or when ambient temperature is below the temperature as recommended by the product manufacturer unless a heat lance is utilized to adequately dry the crack, and as directed by the engineer.

All cracks shall be cleaned of loose dirt and debris by using compressed air of at least 100 psi (7.03 kg/cm²), measured at the source, prior to sealing. The compressor shall be equipped with traps that will maintain the compressed air free of oil and water. Any vegetation shall be removed prior to sealing utilizing a motorized wire brush.

Fill joints and cracks in such a manner to provide a band of 2 inches (50 mm) to 4 inches (100 mm), centered over the joint. The thickness of the material shall be approximately 1/16 inch (1.6 mm) not to exceed 1/8 inch (3.2 mm) above the pavement surface. Material shall be leveled by means of a squeegee or a dish mounted on the delivery wand.

Method of Measurement:

The quantity of sealant material will be measured as the number of linear feet (meters) of sealant material applied which shall be checked immediately prior to application in order to determine the actual linear feet (meters) of cracks injected and accepted.

Basis of Payment:

The quantity of crack sealant material will be paid for at the Contract unit price per linear feet (meters). Price and payment will constitute full compensation for cleaning cracks/joints, for furnishing, heating, and applying crack sealant and for all labor, equipment, tools, and incidentals required to complete the work.

5/15/13

748502 - RAISED/RECESSED PAVEMENT MARKER

Description:

This work consists of furnishing and installing raised/recessed pavement markers in accordance with the Plans and these specifications.

Materials:

The cast iron housing shall meet the requirements of ASTM A 536-84, Grade 72-45-84.

The reflectors shall meet the requirements of ASTM D 4383-03.

For installation on interstates, freeways, and principal arterials, the pavement marker shall have red reflectorized material on the back side (the side not facing the direction of traffic).

Epoxy shall meet the requirements of AASHTO M237, Type IV.

The followings models have been tested and approved by the Department and shall be used:

The followings models have been tested and approved by the Department and shall be used:

1. Ennis Paint - Stimsonite Model 101LPCR with Model C40 reflective pavement markers.
2. Ray-O-Lite Model 300 Snowplowable Marker with Model 2004 Reflector.
3. Or Approved Equal.

Construction Methods:

Pavement shall be saw cut to match the bottom contour of the marker housing using a saw and blade suitable for the pavement material being sawed. The depth of the cut slot must allow the housing to be set in epoxy, with leveling lugs resting on the pavement surface, so that the front edge of marker is at or below the surface of the pavement. Excessive saw cuts must be repaired to the satisfaction of the Engineer. When cutting is complete, the slot shall be cleaned as recommended by the manufacturer of the epoxy material. The epoxy and pavement marker will be installed in the prepared contour slot in the pavement per the manufacturer's recommendations.

Placement shall be in accordance with the DE MUTCD.

Method of Measurement:

The quantity of raised/recessed pavement markers will be measured as the actual number installed and accepted.

Basis of Payment:

The quantity of raised/recessed pavement markers will be paid for at the Contract unit price per each. Price and payment will constitute full compensation for furnishing all materials, installation, saw-cutting, cleaning, disposal of discarded materials, for all labor, tools, equipment, all necessary incidentals associated with the item to complete the work.

07/26/2011

- 748506 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, WHITE/YELLOW, 4"
- 748507 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, WHITE/YELLOW, 6"
- 748508 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, WHITE/YELLOW, 8"
- 748509 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, WHITE/YELLOW, 12"
- 748510 - PERMANENT PAVEMENT STRIPING, SYMBOL/LEGEND, EPOXY RESIN PAINT
- 748535 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, BLACK, 4"
- 748536 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, BLACK, 6"
- 748537 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, BLACK, 8"
- 748538 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, BLACK, 10"
- 748539 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, BLACK, 12"
- 748540 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, BLACK, 16"
- 748548 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, WHITE/YELLOW, 5"
- 748549 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, WHITE/YELLOW, 10"
- 748557 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, BLACK, 3"
- 748559 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, BLACK, 5"
- 748568 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, BLACK, 9"
- 748569 - PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, BLACK, 14"

Description:

This work consists of striping layout, furnishing and applying white or yellow, epoxy reflectorized pavement markings or black epoxy contrast pavement markings at the locations and in accordance with the patterns indicated on the Plans, or as directed by the Engineer, and in accordance with these specifications.

The white/yellow epoxy marking material shall be hot-applied by spray methods onto bituminous and/or Portland cement concrete pavement surfaces as required by the Plans. Following an application of double drop glass beads of two sizes and upon curing, the resultant epoxy marking shall be an adherent reflectorized stripe of the specified thickness and width that is capable of resisting deformation by traffic. All marking materials shall be certified lead free and free of cadmium, mercury, hexvalent chromium, and other toxic heavy metals.

The black epoxy marking shall be a two-component, hot-spray applied epoxy resin pavement marking material to be used for pavement marking on Portland cement concrete pavement surfaces. Following an aggregate drop, and upon curing, it shall produce an adherent stripe of specified thickness and width capable of resisting wear from traffic. Black contrast pavement markings will be required on all Portland cement concrete pavements.

Materials Requirements:

A. White and Yellow Reflectorized Epoxy

1. Epoxy Composition Requirements:

The epoxy resin composition shall be specifically formulated for use as a pavement marking material and for hot-spray application at elevated temperatures. The type and amounts of epoxy resins and curing agents shall be at the option of the manufacturer, providing the other composition and physical requirements of this specification are met.

The epoxy marking material shall be a two-component (Part A and Part B), 100% solids type system formulated and designed to provide a simple volumetric mixing ratio (e.g. two volumes of Part A to one volume of Part B).

Component A of both white and yellow shall conform to the following requirements:

% BY WEIGHT		
	WHITE:	YELLOW:
Pigments	Titanium Dioxide - 18% Min. (ASTM D476, Type II)	Organic Yellow - 6%-10%
Epoxy Resin	75% Min., 82% Max.	70% Min., 77% Max.

The entire pigment composition shall consist of either titanium dioxide and/or organic yellow pigment. No extender pigments are permitted. The white pigment upon analysis, shall contain a minimum of 16.5% TiO₂ (100% purity).

Epoxy Content-WPE (Component A) - The epoxy content of the epoxy resin will be tested in accordance with ASTM D1652 and calculated as the weight per epoxy equivalent (WPE) for both white and yellow. The epoxy content will be determined on a pigment free basis. The epoxy content (WPE) shall meet a target value provided by the manufacturer and approved by the Department's Material and Research Section (from now on will be addressed as Department). A ± 50 tolerance will be applied to the target value to establish the acceptance range.

Amine Value (Component B) - The amine value of the curing agent shall be tested in accordance with ASTM D2074-66 to determine its total amine value. The total amine value shall meet a target value provided by the manufacturer and approved by the Department. A ± 50 tolerance will be applied to the target value to establish the acceptance range.

Toxicity - Upon heating to application temperature, the material shall not exude fumes which are toxic or injurious to persons or property.

Viscosity - Formulations of each component shall be such that the viscosity of both components shall coincide (within 10%) at a recommended spray application.

2. Physical Properties of Mixed Composition:

Unless otherwise noted, all samples are to be prepared and tested at an ambient temperature of $73 \pm 5^\circ\text{F}$. ($23 \pm 3^\circ\text{C}$).

- a. Color. The white epoxy composition when applied at a minimum wet film thickness of $20+1$ mils ($500 \mu\text{m}$) as applicable and allowed to dry, shall plot within the boundaries described by the four corner points listed in Tables 1 and 2 of ASTM D 6628-01 when measured in accordance with the test methods prescribed in Section 7 of ASTM D 6628-01.

The yellow epoxy composition when applied at a minimum wet film thickness of $20+1$ mils ($500 \mu\text{m}$) as applicable and allowed to dry, shall plot within the boundaries described by the four corner points listed in Tables 1 and 2 of ASTM D 6628-01 when measured in accordance with the test methods prescribed in Section 7 of ASTM D 6628-01.

- b. Directional Reflectance. The white epoxy composition (without glass spheres) shall have a daylight directional reflectance of not less than 84% relative to a magnesium oxide standard when tested in accordance with Method 6121 of Federal Test Method Standard No. 141.

The yellow epoxy composition (without glass spheres) shall have a daylight directional reflectance of not less than 55% relative to a magnesium oxide standard when tested in accordance with Method 6121 of Federal Test Method Standard No. 141.

- c. Drying Time (Laboratory). The epoxy composition, when mixed in the proper ratio and applied at a $20+1$ mils ($500 \mu\text{m}$) minimum wet film thickness, and immediately dressed with large reflective glass spheres (Federal Spec. Type 4) at a rate of 12 lb/gal (1.4 kg/l) of epoxy pavement marking materials, immediately followed by a second drop of AASHTO M-247 Type 1 glass spheres applied at a rate of 12 lb/gal (1.4 kg/L) of epoxy pavement marking material, shall exhibit a no-track condition in 15 minutes or less (ASTM D711). A Bird Applicator or any other doctor blade shall be used to produce a uniform film thickness.

- d. Drying Time (Field). When installed at a minimum wet film thickness of 20+1 mils (500 or 625 um) and reflectorized with glass spheres, the maximum drying times shall correspond to these temperatures:
- | | |
|-------------|------------|
| 80°F (27°C) | 10 minutes |
| 70°F (21°C) | 10 minutes |
| 60°F (16°C) | 15 minutes |
| 50°F (10°C) | 25 minutes |
| 40°F (4°C) | 45 minutes |
| 35°F (2°C) | 60 minutes |

The composition shall dry to “no-tracking” in approximately 10 minutes, and after thirty (30) minutes shall show no damaging effect from traffic. Dry to “no-tracking” shall be considered as the condition where no visual deposition of the epoxy marking to the pavement surface is observed when viewed from a distance of 100 feet (30 meters), after a passenger car is passed over the line. Regardless of the temperature at the time of installation, the installation contractor shall be responsible for protection of the markings material until dry to a non-tracking state.

- e. Abrasion Resistance. The wear index of the composition shall not exceed 82 when tested in accordance with ASTM C501 using a CS-17 wheel and under a load of 1000 grams for 1000 cycles.
- f. Tensile Strength. The tensile strength of the epoxy composition shall not be less than 6000 psi (41 MPa) when tested in accordance with ASTM D638 using a Type IV specimen [0.125" ± 0.010" (3.18 ± 0.25 mm) thick]. Tests shall be conducted at an ambient temperature of 75 ± 5°F (24 ± 3°C). The testing machine shall operate at a speed of 0.20" (5.1 mm) per minute.

The total conditioning or drying period, from the time the epoxy composition is first mixed to the time of testing, shall not be less than 24 hours nor more than 96 hours.

Test specimens for tensile strength determination will be prepared as follows:

A 1/8 inch (3 mm) thick sheet of epoxy material is cast from a reservoir-type mold, fabricated from polytetrafluorethylene (PTFE), 1/8" deep x 10" x 10" (3 mm deep x 250 mm x 250 mm).

Prior to casting, the mold is sprayed with a suitable release agent. A sufficient amount of epoxy composition is mixed in the proper proportions (A:B) and poured level with the top of the mold. Care should be taken so as not to decrease or exceed the 1/8" (3 mm) thickness.

After a period of 1 to 4 hours, the material will have set into a semi-rigid sheet that is flexible enough to die-cut yet rigid enough to retain its shape. While the material is in this “plastic” state, five (5) specimens shall be die-cut and then placed on a flat, smooth, PTFE surface for the completion of the specified conditioning period.

- g. Compressive Strength. The compressive strength of the epoxy composition shall not be less than 12,000 psi (83 MPa) when tested in accordance with ASTM D695 except that a compression tool shall not be necessary. The test specimen shall be a right cylinder [0.50 inch diameter by 1.0 inch length (12 mm diameter by 25 mm length)]. Tests shall be conducted at an ambient temperature of 75 ± 5°F (24 ± 3°C).

The total conditioning or drying period, from the time the epoxy composition is first mixed to the time of testing shall not be less than 24 hours nor more than 96 hours.

Test specimens for compressive strength determinations will be prepared as follows:

Five molds will be prepared from 1/2" (12 mm) I.D., 1/16" (1.5 mm) wall thickness acrylic tubing, cut in 1 1/2" (38 mm) lengths. After spraying the inside of the mold with a suitable release agent,⁽¹⁾ the cylindrical tubes are placed in a vertical position on a PTFE sheet base. A sufficient amount of epoxy composition is thoroughly

mixed in the proper proportions (A:B) and poured into the mold to a depth of approximately 1 1/4" (32 mm). After a minimum of 72 hours curing, the specimens are removed from the molds and machined to a length of 1" ± 0.002" (25 mm ± 0.05 mm).

- h. Hardness. The epoxy composition when tested in accordance with ASTM D2240 shall have a Shore D hardness of between 75 and 100. Samples shall be allowed to dry for not less than 24 hours nor more than 96 hours prior to testing.

B. Reflective Glass Spheres/Beads

Reflective glass spheres for drop-on application shall conform to the following requirements:

The glass spheres shall be colorless; clean; transparent; free from milkiness or excessive air bubbles; and essentially clean from-surface scarring or scratching. They shall be spherical in shape and at least 80% of the glass beads shall be true spheres when tested in accordance with ASTM D1155. At least 80% of the Type IV beads shall be true spheres as measured by the visual method.

The refractive index of the spheres shall be a minimum of 1.50 as determined by the liquid immersion method at 77°F (25°C).

The silica content of the glass spheres shall not be less than 60%.

The crushing resistance of the spheres shall be as follows: A 40 lb. (18 kg) dead weight, for 20 to 30 (850 µm to 600 µm) mesh spheres shall be the average resistance when tested in accordance with ASTM D1213.

The glass spheres shall have the following grading when tested in accordance with ASTM D1214.

M247 AASHTO Type 1 Glass Spheres

<u>U.S. Standard Sieve</u>	<u>% Retained</u>	<u>% Passing</u>
#20 (850µm)	0	100
#30 (600µm)	5-25	75-95
#50 (300µm)	40-65	15-35
#100 (150µm)	15-35	0-5
Pan	0-5	

Type 4 Large Spheres

<u>U.S. Standard Sieve</u>	<u>% Retained</u>	<u>% Passing</u>
#10 (2000 µm)	0	100
#12 (1680 µm)	0-5	95-100
#14 (1410 µm)	5-20	80-95
#16 (1190 µm)	40-80	10-40
#18 (1000 µm)	10-40	0-5
#20 (850 µm)	0-5	0-2
Pan	0-2	

The AASHTO M247 Type 1 glass spheres shall be treated with a moisture-proof coating. They shall show no tendency to absorb moisture in storage and shall remain free of clusters and hard lumps. They shall flow freely from dispensing equipment at any time when surface and atmosphere conditions are satisfactory for marking operations. The moisture-resistance of the glass spheres shall be determined in accordance with AASHTO M247 test method 4.4.1.

Type IV glass spheres shall be treated with an adhesion coating. They shall show no tendency to absorb moisture in storage and shall remain free of clusters and hard lumps. They shall flow freely from dispensing equipment at any time when surface and atmosphere conditions are satisfactory for marking operations. The adhesion coating property of the Type IV beads shall be tested in accordance with the dansyl-chloride test.

C. Black Epoxy Contrast Markings

Epoxy Resin Requirements: The two-component, 100% solids, paint shall be formulated and designed to provide a simple volumetric mixing ratio (e.g. 2 part component A to 1 part component B) specifically for service as a hot-spray applied binder for black aggregate in such a manner as to produce maximum adhesion. The material shall be composed of epoxy resins and pigments only.

The paint shall be well mixed in the manufacturing process and shall be free from defects and imperfections that may adversely affect the serviceability of the finished product. The paint shall not thicken, curdle, gel, settle excessively, or otherwise display any objectionable properties after storage. Individual components shall not require mixing prior to use when stored for a maximum of 6 months.

The overall paint composition shall be left to the discretion of the manufacturer, but shall meet the following requirements:

Composition:	<u>Component</u> Carbon Black (ASTM D476 Type III) Talc Epoxy Resin	<u>Percent By Weight</u> 7±2 percent, by weight 14±2 percent, by weight 79±4 percent, by weight
--------------	---	--

D. Black Aggregate

The moisture resistant aggregate shall meet the gradation requirements (AASHTO T27) as follows:

<u>Sieve Size</u>	<u>Percent Retained</u>
#30	18-28%
#40	60-80%
#50	2-14%

The moisture resistant aggregate shall have a ceramic coating. The aggregate shall be angular with no dry dispensement pigment allowed.

<u>Hardness:</u>	The black aggregate hardness shall be 6.5-7 on Moh's Mineral Scale.
<u>Porosity:</u>	The black aggregate porosity shall be less than two (2) percent.
<u>Moisture Content:</u>	The black aggregate moisture content shall be less than a half (.5) percent.

E. Packaging and Shipment

Epoxy pavement marking materials shall be shipped to the job site in strong substantial containers. Individual containers shall be plainly marked with the following information:

- a. Name of Product
- b. Lot Number
- c. Batch Number
- d. Test Number
- e. Date of Manufacture
- f. Date of expiration of acceptance (12 months from date of manufacture)
- g. The statement (as appropriate)
Part A - Contains Pigment & Epoxy Resin
Part B - Contains Catalyst
- h. Quantity
- i. Mixing proportions, Application Temperature and Instructions
- j. Safety Information
- k. Manufacturer's Name and Address

Reflective glass spheres shall be shipped in moisture resistant bags. Each bag shall be marked with the name and address of the manufacturer and the name and net weight of the material.

F. The Department reserves the right to randomly take a one-quart sample of white, yellow and hardener, of the epoxy material or glass spheres without prior notice for testing to ensure the epoxy material meets specifications.

Epoxy Application Equipment:

Application equipment for the placement of epoxy reflectorized pavement markings shall be approved by the Department, prior to the start of work.

At any time throughout the duration of the project, the Contractor shall provide free access to his epoxy application equipment for inspection by the Engineer or his authorized representative.

In general, the application equipment shall be a mobile, truck mounted and self contained pavement marking machine, specifically designed to apply epoxy resin materials and reflective glass spheres in continuous and skip-line patterns. The application equipment shall be maneuverable to the extent that straight lines can be followed and normal curves can be made in a true arc. In addition, the truck mounted unit shall be provided with accessories to allow for the marking of legends, symbols, crosswalks, and other special patterns.

The Engineer may approve the use of a portable applicator in lieu of truck mounted accessories, for use in applying special markings only, provided such equipment can demonstrate satisfactory application of reflectorized epoxy markings in accordance with these specifications.

The applicator shall be capable of installing up to 20,000 lineal feet (6,100 lineal meters) of epoxy reflectorized pavement markings in an 8-hour day and shall include the following features:

1. The applicator shall provide individual material reservoirs, or space, for the storage of Part A and Part B of the epoxy resin composition; for the storage of water; and for the storage of reflective glass spheres.
2. The applicator shall be equipped with heating equipment of sufficient capacity to maintain the individual epoxy resin components at the manufacturer's recommended temperature for spray application and for heating water to a temperature of approximately 140°F (60°C).
3. The glass spheres shall be gravity dropped upon 20 mils (500 um) of epoxy pavement markings to produce a wet-night-reflective pavement marking. The large spheres (Federal Spec. Type 4) shall be applied at a rate of 12 pounds per gallon (1.4 kg/L) of epoxy pavement marking material, immediately followed by a second drop of AASHTO M-247 Type 1 glass spheres applied rate of 12 pounds per gallon (1.4 kg/L) of epoxy pavement marking material. This application rate and the following gradation shall conform to FHWA's FP-96: Standard Specifications for Construction of Roads and Bridges on Federal Highway Projects (pages 757-761 Type 3 and Type 4 Beads).
4. The applicator shall be equipped with metering devices or pressure gauges, on the proportioning pumps. Metering devices or pressure gauges shall be visible to the Engineer.
5. The applicator shall be equipped with all the necessary spray equipment, mixers, compressors, and other appurtenances to allow for the placement of epoxy reflectorized pavement markings in a simultaneous sequence of operations as described below in Construction Details, D. Applications of Epoxy Reflectorized Pavement Markings of this Special Provisions.

Construction Details.

- A. General: All pavement marking and patterns shall be placed as shown on the Plans or as directed by the Engineer.

Before any pavement markings work is begun, a schedule of operations shall be submitted for the approval of the Engineer. This schedule shall be submitted 2 weeks prior to the application of the striping.

At least five (5) days prior to starting striping the Contractor shall provide the Engineer with the epoxy manufacturer's written instructions for use. These instructions shall include but not be limited to: mixing ratios, application temperatures, and recommendations for use of water spray.

The application of pavement markings shall be done in the general direction of traffic. Striping against the direction of traffic flow shall not be allowed.

The Contractor shall be responsible for removing, to the satisfaction of the Engineer, tracking marks, spilled epoxy or epoxy markings applied in unauthorized areas.

The hot water spray shall not be used in conjunction with markings applications on any pavement surface, or on any existing durable type marking, unless specifically recommended by the manufacturer of the epoxy material.

- B. Atmospheric Conditions: Epoxy pavement markings shall only be applied during conditions of dry weather and on substantially dry pavement surfaces. At the time of installation the pavement surface temperature shall be a minimum of 35 °F (2 °C) and the ambient temperature shall be a minimum of 35 °F (2 °C) and rising. The Engineer shall be the sole determiner as to when atmospheric conditions and pavement surface conditions are such to produce satisfactory results.
- C. Surface Preparations: The Contractor shall clean the pavement or existing durable marking to the satisfaction of the Engineer.

Surface cleaning and preparation work shall be performed only in the area of the epoxy markings application.

At the time of application all pavement surfaces and existing durable markings shall be free of oil, dirt, dust, grease and similar foreign materials. The cost of cleaning these contaminants shall be included in the bid price of this item. Also, the item shall include the cost of removal of the curing component in the area of the epoxy markings application, if concrete curing compounds on new portland cement concrete surfaces have been used. Waterblasting will not be permitted for removal.

- D. Application of White/Yellow Epoxy Reflectorized Pavement Markings: White/yellow epoxy reflectorized pavement markings shall be placed at the widths and patterns designated on the Contract Plans.

Markings operations shall not begin until applicable surface preparation work is completed, and approved by the Engineer.

White/yellow epoxy pavement markings shall be applied at a minimum uniform thickness of 20 mils (500 µm) on all Portland cement concrete and bituminous concrete pavement, including Stone Matrix Asphalt.

Large reflective glass spheres (Federal Spec. Type 4) shall be applied at the rate of 12 pounds per gallon (1.4 kg/L) of epoxy pavement marking material, immediately followed by a second drop of AASHTO M-247 Type 1 glass spheres applied at a rate of 12 pounds per gallon (1.4 kg/L) of epoxy pavement marking material. Glass spheres shall uniformly cover the length and width of the pavement marking.

- E. Application of Black Epoxy Contrast Pavement Markings: Black epoxy contrast pavement markings shall be placed at the widths designated on the Contract Plans.

Markings operations shall not begin until applicable surface preparation work is completed, and approved by the Engineer.

Black epoxy contrast pavement markings shall be applied at a minimum uniform thickness of 20 mils (500 µm) on all Portland cement concrete surfaces followed by a single drop of graded black aggregate.

The width of black epoxy line shall be applied for the following situations:

Center Skip Line - On Portland cement concrete pavements a black contrast skip line shall be 10 feet (3 m) in length of the same width as the white epoxy reflectorized skip. It is to lead the white skip and stop at the beginning of the white skip. The black contrast skip is to have a single application of graded black aggregate.

Edge Lines -White Edge lines on Portland cement concrete pavements shall have a 3 inch black contrast line running parallel to the white edge line. The contrast line shall be to the inside or travel lane side of the edge line. The black contrast marking is to be applied with a single drop of graded black aggregate. Once it has cured sufficiently so as not to track, the reflectorized white line is to be applied along side of the contrast line and the two lines shall adjoin each other.

Dotted Line: All dotted lines on Portland cement concrete pavements shall have a base of black contrast markings which is 4 inches (100 mm) wider than the reflective white marking. The black contrast marking is to be applied first with a single drop of graded black aggregate. Once it has cured sufficiently so as not to track, the reflectorized white line is to be applied on top of it. The reflective line is to be centered along the black contrast line such that a minimum of 2 inches (50 mm) of black contrast marking is visible on either side of the reflective marking.

F. Defective Epoxy Pavement Markings: Epoxy reflectorized pavement markings, which after application and curing are determined by the Engineer to be defective and not in conformance with this specification, shall be repaired. Repair of defective markings shall be the responsibility of the Contractor and shall be performed to the satisfaction of the Engineer as follows:

1. Insufficient film thickness [(less than 20+1 mils (500 μ m) as applicable] and line widths; insufficient glass bead coverage or inadequate glass bead retention.

Repair Method: Prepare the surface of the defective epoxy marking by shot blasting, sand blasting, or water blasting. No other cleaning methods will be allowed. Surface preparation shall be performed to the extent that a substantial amount of the reflective glass spheres are removed and a roughened epoxy marking surface remains.

Immediately after surface preparation remove loose particles and foreign debris by brooming or blasting with compressed air.

Repair shall be made by re-striping over the cleaned surface, in accordance with the requirements of this specification and at a full 20+1 mils (500 μ m) minimum line thickness as applicable.

2. Uncured or discolored epoxy (brown patches); insufficient bond to pavement surface (or existing durable marking).

Uncured epoxy shall be defined as applied material that fails to cure (dry) in accordance with the requirements of this specification under MATERIALS, A, 2d. DRYING TIME (FIELD); or applied material that fails to cure (dry) within a reasonable time period under actual field conditions, as defined by the Engineer.

Discoloration (brown patches) shall be defined as localized areas or patches of brown or grayish colored epoxy marking material. These areas often occur in a cyclic pattern and also, often are not visible until several days or weeks after markings are applied.

Repair Method: The defective epoxy marking shall be completely removed and cleaned to the underlying pavement surface to the satisfaction of the Engineer.

The extent of removal shall be the defective area plus any adjacent epoxy pavement marking material extending one foot (300 mm) any direction.

After surface preparation work is complete, repair shall be made by re-applying epoxy over the cleaned pavement surface in accordance with the requirements of this specification.

3. Reflectivity for epoxy resin paint.

After satisfactory completion of all striping work and written notification from the Contractor, the Department shall test the striping to ensure it has the minimum reflectivity. The testing will be completed within 30 calendar days from notification. The Contractor may request that tests be conducted on completed phases or portions of the work. Approval of such a request will be at the discretion of the Engineer. Testing will be done using a LTL-X Retrometer (30 meter geometry). Five readings will be taken per line per mile (1.6 km). Projects less than 1 mile (1.6 km) in length will have a minimum of 5 readings per line. These readings will then be averaged for the overall project average.

The required average minimum initial reflectivity reading in millicandellas shall be:

White 450
Yellow 325

Any single reading shall not be less than 350 millicandellas for white and 250 millicandellas for yellow. Without exception, any pavement markings installed that does not meet the above average minimum initial reflectivity numbers shall be removed and replaced, at the installation contractor's expense.

Other defects not noted above, but determined by the Engineer to need repair, shall be repaired or replaced as directed by and to the satisfaction of the Engineer.

All work in conjunction with the repair or replacement of defective epoxy reflectorized pavement markings shall be performed by the Contractor at no additional cost to the State.

Method of Measurement:

The quantity of permanent pavement striping (white, yellow, or black epoxy resin paint) will be measured by the number of linear feet (meters) of pavement striping line and number of square feet (meter) of symbol installed on the pavement and accepted in accordance with the Plans.

Basis of Payment:

The quantity of permanent pavement striping (white, yellow, or black epoxy resin paint) payment will be paid for at the Contract unit price per linear foot (meter) for 3", 4", 5", 6", 8", 9", 10", 12", 14", 16" (75 mm, 100 mm, 125 mm, 150 mm, 200 mm, 225 mm, 250 mm, 300 mm, 350 mm, or 400 mm) line and the Contract unit price per square foot (meter) of symbol. The quantity of permanent pavement marking (white, yellow, or black epoxy resin paint) will be paid for at the Contract unit price per linear foot (meter) of line and the Contract unit price per square foot (meter) of symbol. Price and payment shall include striping layout, cleaning and preparing the pavement surface, and placing all materials, for all labor, tools, equipment and incidentals necessary to complete the work.

NOTE:

For information only:

The following manufacturers are known to us which manufacturer Epoxy Resin Paint for Pavement Striping. The Department does not endorse or require the use of any of the manufacturers listed below. However, a bidder wishes to use another manufacturer's product, it shall be submitted for review and approval prior to submitting a bid proposal. Should the product be deemed unacceptable by the Department, the successful bidder will be required to use only an approved product.

1. POLY CARB, Inc.
33095 Bainbridge Road
Solon, Ohio 44139
Tel. 1-800-CALLMIX
2. IPS - Ennis Paint
P.O. Box 13582
Research Triangle Park, North Carolina 27709
Tel. 1-877-477-7623

3. Epoplex
One Park Avenue
Maple Shade, NJ 08052
Tel. 1-800-822-6920
4. Or an approved equal.

8/7/2013

- 748541 - PREFORMED RETROREFLECTIVE THERMOPLASTIC PAVEMENT MARKINGS,
4"
- 748542 - PREFORMED RETROREFLECTIVE THERMOPLASTIC PAVEMENT MARKINGS,
6"
- 748543 - PREFORMED RETROREFLECTIVE THERMOPLASTIC PAVEMENT MARKINGS,
8"
- 748544 - PREFORMED RETROREFLECTIVE THERMOPLASTIC PAVEMENT MARKINGS,
12"
- 748545 - PREFORMED RETROREFLECTIVE THERMOPLASTIC PAVEMENT MARKINGS,
16"
- 748546 - PREFORMED RETROREFLECTIVE THERMOPLASTIC PAVEMENT MARKINGS,
SYMBOL/LEGEND
- 748553 - PREFORMED RETROREFLECTIVE THERMOPLASTIC PAVEMENT MARKINGS,
BIKE SYMBOL
- 748554 - PREFORMED RETROREFLECTIVE THERMOPLASTIC PAVEMENT MARKINGS,
PEDESTRIAN SYMBOL
- 748555 - PREFORMED RETROREFLECTIVE THERMOPLASTIC PAVEMENT MARKINGS,
HANDICAP SYMBOL

Description:

This work consists of furnishing and installing preformed retroreflective thermoplastic pavement marking with a preapplied Federal Specification Type IV glass bead coating throughout its entire cross section on bituminous asphalt pavement at the locations and in accordance with the patterns on the Plans, or as directed by the Engineer.

The preformed retroreflective markings shall conform to the size and dimensions as shown in the Federal "Standard Highway Signs" book found at: <http://mutcd.fhwa.dot.gov/SHSe/pavement.pdf> as referred to in the Delaware Manual on Uniform Traffic Control Devices, Part 3, Markings.

Materials:

General: Only materials listed on the Department's Approved Pavement Markings Material List will be used for this item. The preformed retroreflective markings shall be fusible to bituminous asphalt pavement by means of the normal heat of a propane type of torch. Adhesives, primers or sealers are not necessary prior to the preformed retroreflective markings application on bituminous asphalt pavement.

The preformed retroreflective markings shall conform to pavement contours, breaks and faults through the action of traffic at normal pavement temperatures. The markings shall have resealing characteristics and be capable of fusing to itself and previously applied worn hydrocarbon and/or alkyl thermoplastic pavement markings.

The preformed retroreflective markings shall be capable of application on bituminous asphalt pavement wearing courses during the paving operation in accordance with the manufacturer's instructions. After application the markings shall be immediately ready for traffic. The preformed retroreflective markings shall be suitable for use for one year after the date of receipt when stored in accordance with the manufacturer's recommendations.

The preformed retroreflective thermoplastic markings shall not be brittle and must be sufficiently cohesive and flexible at temperatures exceeding 50°F (10°C) for one person to carry without the danger of fracturing the material prior to application.

Composition: The retroreflective pliant rosin ester thermoplastic pavement markings shall consist of a homogeneous mixture of high quality polymeric thermoplastic binders, pigments, fillers and glass beads. The thermoplastic material must conform to AASHTO M249-79(86) with the exception of the relevant differences due to the material being preformed, and identified herein.

Intermix Glass Beads: The preformed retroreflective material shall contain a minimum of 30% glass spheres which shall conform to AASHTO M247-81 Type 1. Glass spheres shall have a minimum of 80% true spheres overall.

Top Beads: To provide the required retroreflectivity, the preapplied factory top coating of glass beads shall be a combination of both Federal Spec. Type IV and AASHTO M247-81 Type I beads. Federal Spec. Type IV beads shall be evenly disbursed across the entire surface of the product at a minimum rate of 4 lb. (1.8 kg) per 100 ft² (9.3 m²) and the AASHTO at 3 lb. (1.4 kg) per 100 ft² (9.3 m²). In combination, the total glass bead coverage shall be 7-8 lb. (3.2-3.6 kg) per 100 ft² (9.3 m²). The AASHTO M247-81 Type I beads shall have a minimum of 80% true spheres overall and the Federal Spec. Type IV beads shall be 80% true spheres on the 12 and 14 sieves and shall be no less than 75% true spheres on the remaining sieves.

Retroreflectivity: After satisfactory completion of all striping work and written notification from the contractor, the Department shall test the striping to ensure it has the minimum reflectivity. The testing will be completed within 30 calendar days from notification. Testing will be done using a Delta LTL 2000 Retrometer (30 meter geometry). The required minimum initial reflectivity reading in millicandellas shall be:

White 300
Yellow 200
Blue 200

Skid Resistance: The surface of the preformed retroreflective thermoplastic markings shall provide a pre-applied minimum skid resistance value of 45-51 BPN and a post-applied minimum skid resistance value of 45-55 BPN when tested according to ASTM E303-74.

Thickness: The thickness of the supplied material shall have a minimum average thickness of .090" (90 mils) for all Longitudinal lines and a thickness of .125" (125 mils) for all transverse lines and symbols/legends.

Tensile Strength and Elongation: The preformed retroreflective thermoplastic material shall have a minimum tensile strength of 150 lb. per square inch (1054 kg per square mm) of cross section, at .002" (2.28 mil) thickness, when tested according to ASTM D638-76 except that a sample 6" by 1" (150 mm by 25 mm) shall be tested at a temperature between 70°F and 80°F (21°C and 27°C) using a jaw speed of 10" to 12" (250 mm to 300 mm) per minute. The sample shall have a maximum elongation of 20% at break when tested by this method.

Flexibility: The preformed retroreflective thermoplastic marking material shall have flexibility at 50°F such that when a 1" by 6" (25 mm by 150 mm) sample is bent through an arc of 90 degrees at a uniform rate in 10 seconds (9 degrees per second) over a 1" (25 mm) mandrel, no cracking occurs in the test sample. The sample must be conditioned prior to testing at 50°F±2 degrees (10°C) for a minimum of four hours. At least two specimens tested must meet the flexibility requirements at 50°F (10°C) for a passing result.

Environmental Resistance: The applied markings shall be resistance to deterioration due to exposure to sunlight, water, oil, diesel fuels, gasoline, pavement oil content, salt and adverse weather conditions.

Effective Performance Life: When properly applied, in accordance with manufacturer's instructions, the preformed retroreflective pavement markings shall be neat and durable. The markings shall remain skid resistant and show no lifting, shrinkage, tearing, roll back or other signs of poor adhesion for a period of one winter season.

Oil/grease Resistant Test: The preformed retroreflective thermoplastic material shall not dissolve or smear after rubbing a small amount of motor oil on a small piece of the thermoplastic material for two minutes.

Bond Strength: The material shall exhibit a bond strength to Portland Cement Concrete (PCC) equal or exceed 180 psi when tested at room temperature (73.4±3°F) (23°C) in accordance to ASTM Standard Test Method for Bond Strength of thermoplastic marking Material D4796-88. Place a coarse brick in a 400°F (204°C) oven for 5 minutes. Prepare a 4 square inch test specimen. Place the test specimen on the brick and further heat in the 400°F (204°C) oven for 15 minutes. The test specimen is then allowed to cool to room temperature and prepared for testing.

Low Temperature Cracking (Stress) Resistance for Extended Period: The material shall be tested according to AASHTO T250 Section 7 with Section 7.2.3 modified for and extended cold temperature 15 degrees $\pm 3^{\circ}\text{F}$ ($-9.4 \pm 2^{\circ}\text{C}$) exposure period 72 hours. Any cracking shall constitute failure of the material for PCC road surfaces.

Impact Resistance (Gardner Falling Weight): A 2" by 7.5" (50 by 190 mm) specimen shall be applied on a course concrete brick. Using a Gardner Impact Tester, a 2 lb (.91 kg) weight is dropped from a height of 80" (2032 mm). The specimen when tested at room temperature $73.4 \pm 3^{\circ}\text{F}$ (23°C) should show no sign of cracking. (Test procedure is in accordance with ASTM D5420-93).

Packaging: The flexible preformed retroreflective thermoplastic marking materials, for use as transverse or longitudinal markings as well as legends, arrows and symbols shall be available in flat form material or in rolls. Flat material shall be supplied in maximum of 4' (1.2 m) lengths up to 2' (.6 m) in width. The material shall be packed in suitable cartons clearly labeled for ease of identifying the contents.

Construction Methods:

The markings shall be applied in strict accordance with the manufacturer's recommendations on clean and dry surfaces. Marking configurations shall be in accordance with the "Delaware Manual on Uniform Traffic Control Devices, Part 3, Markings."

The preformed retroreflective thermoplastic material shall be fusible to the pavement by means of a propane torch recommended by the manufacturer. Preheating the surface to remove any latent moisture will be done just prior to the placement and installation of the Symbol/ Legend.

No markings shall be placed when the ambient temperature is below 40°F (4°C). The material shall be kept in a location above 55°F (13°C) until just before application.

The supplier shall provide technical services as may be required.

Method of Measurement:

The quantity of pavement striping (748541-748545) will be measured by the number of linear feet (linear meters) of 4", 6", 8", 12", or 16" pavement striping line placed and accepted. The quantity of symbol/ legend (748546) will be measured by the number of square feet (meters) of symbol/legend placed and accepted. The quantity of bike symbol, pedestrian symbol, and handicap symbol (748551-748553) will be measured as each placed and accepted. The dimensions for the symbol/legends are as follows:

Bike Rider with Helmet shall be 3' X 5'.

Pedestrian shall be 4' X 8'.

Handicap Symbol shall be 40" X 40".

Basis of Payment:

The quantity of pavement striping payment will be paid for at the Contract unit price per linear foot (linear meter) for 4", 6", 8", 12" and 16" (100 mm, 150 mm, 200 mm, 300 mm, and 400 mm) line. The quantity of symbol/legend will be paid for at the Contract unit price per square foot (meter). The quantity of bike symbol, pedestrian symbol, and handicap symbol will be paid for at the Contract unit price per each. Price and payment shall include cleaning and preparing the pavement surface, and placing all materials, for all labor, tools, equipment and incidentals necessary to complete the work.

Warranty:

The Contractor shall warrant to the Department that the installed retroreflective preformed thermoplastic pavement markings are free of defects, as hereafter defined, for a period of one winter season beginning at the initial acceptance of the marking installation by the Department. The initial acceptance of the marking installation will occur upon the satisfactory correction of all deficiencies noted in the marking installation during the Final Inspection of the project. The markings shall be warranted against failure due to blistering, excessive cracking, bleeding, staining, discoloration, oil content of the pavement materials, smearing and spreading under heat, deterioration due to contact with grease deposits, oil, diesel fuel, or gasoline drippings, chipping, spalling, poor adhesion to the pavement materials, vehicular damage, and wear from normal maintenance activities including snow plowing.

The Contractor shall repair all defective areas identified by the Department after initial installation or during the Warranty Period. All repairs shall begin immediately following the notice to the Contractor by the Department unless weather limitations prevent the corrective work. Should the contractor not commence work within the period stated in the notice, weather permitting, and pending severity, the Department reserves the right to remedy the condition and charge the contractor for the work. Any corrective work shall be as recommended by the manufacturer of the marking material and approved by the Department. The Department shall be given notification before the Contractor begins corrective work to allow for inspection of the operation. All costs associated with the repair work shall be the responsibility of the contractor. These costs shall include, but are not limited to, removal, material, maintenance of traffic, etc.

2/28/09



STATE OF DELAWARE
DEPARTMENT OF TRANSPORTATION
800 BAY ROAD
P.O. Box 778
DOVER, DELAWARE 19903

SHAILEN P. BHATT
SECRETARY

**UTILITY STATEMENT
STATE CONTRACT No. T201406802
P3E#13-99904
FOG SEAL AND SAND SEAL, CENTRAL DISTRICT, FY14
KENT COUNTY**

No utility relocation involvement is anticipated, should any conflicts be encountered during construction requiring adjustment and/or relocation to the aforementioned utilities' existing facilities, the necessary relocation work shall be accomplished by the respective agencies, as directed by the District Engineer.

Relocations/or adjustments to existing gas lines/or valves shall be arranged, if necessary, with the owners during the construction of the project. The time to complete any additional relocations/adjustments will depend on the nature of the work.

Any adjustments and/or relocations of municipally owned sewer or water facilities shall be done by the State's contractor in accordance with the respective agencies' standard specifications as directed by the District Engineer.

General Notes

- 1. The Contractor's attention is directed to Section 105.09 Utilities, Delaware Standard Specifications, August 2001. The Contractor shall contact Miss Utility (1-800-282-8555) two working days prior to any excavation. The Contractor is responsible for the support and protection of all utilities when excavating. The Contractor is responsible for ensuring proper clearances, including safety clearances, from overhead utilities for construction equipment. The Contractor is advised to check the site for access purposes for his equipment and, if necessary, make arrangements directly with the utility companies for field adjustments for adequate clearances.**
- 2. It is understood and agreed that the Contractor has considered in his bid all permanent and temporary utility appurtenances in their present and relocated positions as shown on the plans or described in the Utility Statement or are readily discernible and that no additional compensation will be allowed for any delays, inconvenience, or damage due to any interference from the utility facilities and appurtenances or the operation of moving them, except that the Contractor may be granted an equitable extension of time.**

Utility Statement
State Contract T201406802
Fog Seal and Sand Seal, Central District, FY 14
New Castle County

- 3. Coordination and cooperation among the Utility Companies and the State's Contractor are of prime importance. Therefore, the Contractor is directed to contact the following Utility Company representatives with any questions regarding this work prior to submitting bids and work schedules. Proposed work schedules should reflect the Utility Companies' proposed relocations. The Utility Companies do not work on weekends or legal holidays.**

Division of Transportation Solutions

February 28, 2014
Date

Deborah Kukulich
Deborah Kukulich
Utility Coordinator

**STATE OF DELAWARE
DEPARTMENT OF TRANSPORTATION
PO BOX 778
DOVER, DELAWARE 19903**

CERTIFICATE OF RIGHT-OF-WAY STATUS

STATE PROJECT NO. T201406802

F.A.P. NO. N/A for R/W

FOG SEAL AND SAND SEAL CENTRAL DISTRICT - FY14

KENT COUNTY

Certificate of Right-of-Way Status – 100%

Level 1

As required by 23CFR Part 635, all necessary real property interests have been acquired in accordance with current State/Federal rules and regulations covering the acquisition of real property.

This is to certify that all project rights of way is currently available in accordance with the project right-of-way plans.

It is further certified that there were no individuals or families displaced by this project. Therefore the provisions of 49 CFR Part 24 is not applicable to the project.

There are no improvements to be removed or demolished as part of this project.

REAL ESTATE SECTION

Robert Cunningham
Assistant Director Transportation Solutions
Right of Way

March 19, 2014



STATE OF DELAWARE
DEPARTMENT OF TRANSPORTATION
800 BAY ROAD
P.O. Box 778
DOVER, DELAWARE 19903

SHAILEN P. BHATT
SECRETARY

May 12, 2014

ENVIRONMENTAL REQUIREMENTS

FOR

State Contract No. T201406802

Federal Aid No.: None

Contract Title: Fog Seal and Sand Seal, Statewide, FY 2014

In accordance with the procedural provisions for implementing the National Environmental Policy Act of 1969, as amended, the referenced project has been processed through the Department's Environmental Review Procedures and has been classified as a Level D/ Class II Action.

Due to the nature of the proposed construction activities, permits are not required for this project. However, the following construction requirements and special provisions have been developed to minimize and mitigate impact to the surrounding environs. These requirements by DelDOT not specified within the contract, but listed below, are the responsibility of the contractor and are subject to risk of shut down at the contractor's expense if not followed.

GENERAL REQUIREMENTS:

1. All construction debris, excavated material, brush, rocks, and refuse incidental to such work shall be placed either on shore above the influence of flood waters or on some suitable dumping ground.
2. That effort shall be made to keep construction debris from entering adjacent waterways or wetlands. Any debris that enters those areas shall be removed immediately.
3. The disposal of trees, brush, and other debris in any stream corridor, wetland, surface water, or drainage area is prohibited.



BID PROPOSAL FORMS

CONTRACT T201406802.02

CONTRACT ID: T201406802.02

PROJECT(S): T201406802.02

All figures must be typewritten.

CONTRACTOR :

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS

SECTION 0001 Category 0001

0010	401756 RUBBER MODIFIED FOG SEAL	37000.000 GAL				
0020	401758 COAL SLAG	370000.000 LB				
0030	406507 CRACK SEALING	22478.000 LF				
0040	743003 ARROWPANELS, TYPE C	45.000 EADY				
0050	743007 TRAFFIC OFFICERS	8.000 HOUR	75.00000		600.00	
0060	743010 FURNISH AND MAINTAIN TRUCK MOUNTED ATTENUATOR, TYPE II	45.000 EADY				
0070	743024 TEMPORARY WARNING SIGNS AND PLAQUES	1000.000 EADY				
0080	743050 FLAGGER, NEW CASTLE COUNTY, STATE	40.000 HOUR				
0090	743051 FLAGGER, KENT COUNTY, STATE	300.000 HOUR				

CANNOT BE USED FOR BIDDING

CONTRACT ID: T201406802.02

PROJECT(S): T201406802.02

All figures must be typewritten.

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0100	743052 FLAGGER, SUSSEX COUNTY, STATE	40.000 HOUR				
0110	743062 FLAGGER, NEW CASTLE COUNTY, STATE, OVERTIME	3.000 HOUR				
0120	743063 FLAGGER, KENT COUNTY, STATE, OVERTIME	50.000 HOUR				
0130	743064 FLAGGER, SUSSEX COUNTY, STATE, OVERTIME	4.000 HOUR				
0140	748015 PERMANENT PAVEMENT STRIPING, SYMBOL/LEGEND ALKYD-THERMOPLAST IC	470.000 SF				
0150	748016 PERMANENT PAVEMENT STRIPING, ALKYD-THERMOPLASTIC, 8"	128.000 LF				
0160	748019 TEMPORARY MARKINGS, PAINT, 4"	82000.000 LF				
0170	748026 TEMPORARY MARKINGS, PAINT SYMBOL/LEGEND	857.000 SF				
0180	748036 PAINTING OF WHITE OR YELLOW, 5" LINE	42000.000 LF				
0190	748502 RAISED/RECESSED PAVEMENT MARKER	152.000 EACH				

CANNOT BE USED FOR BIDDING

CONTRACT ID: T201406802.02

PROJECT(S): T201406802.02

All figures must be typewritten.

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0200	748548 PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, WHITE/YELLOW, 5"	40000.000 LF				
0210	748553 PREFORMED RETROREFLECTIVE THERMOPLASTIC PAVEMENT MARKINGS, BIKE SYMBOL	3.000 EACH				
0220	763000 INITIAL EXPENSE	LUMP	LUMP			
	SECTION 0001 TOTAL					
	TOTAL BID					

CANNOT BE USED FOR BIDDING

CERTIFICATION
Contract No. T201406802.02

The undersigned bidder, _____
whose address is _____
and telephone number is _____ hereby certifies the following:

I/We have carefully examined the location of the proposed work, the proposed plans and specifications, and will be bound, upon award of this contract by the Department of Transportation, to execute in accordance with such award, a contract with necessary surety bond, of which contract this proposal and said plans and specifications shall be a part, to provide all necessary machinery, tools, labor and other means of construction, and to do all the work and to furnish all the materials necessary to perform and complete the said contract within the time and as required in accordance with the requirements of the Department of Transportation, and at the unit prices for the various items as listed on the preceding pages.

The foregoing quantities are considered to be approximate only and are given as the basis for comparison of bids. The Department of Transportation may increase or decrease the amount of any item or portion of the work as may be deemed necessary or expedient. Any such increase or decrease in the quantity for any item will not be regarded as a sufficient ground for an increase or decrease in the unit prices, nor in the time allowed for the completion of the work, except as provided in the contract.

Accompanying this proposal is a surety bond or a security of the bidder assigned to the Department of Transportation, for at least ten (10) percentum of total amount of the proposal, which deposit is to be forfeited as liquidated damages in case this proposal is accepted, and the undersigned shall fail to execute a contract with necessary bond, when required, for the performance of said contract with the Department of Transportation, under the conditions of this proposal, within twenty (20) days after date of official notice of the award of the contract as provided in the requirement and specifications hereto attached; otherwise said deposit is to be returned to the undersigned.

I/We are licensed, or have initiated the license application as required by Section 2502, Chapter 25, Title 30, of the Delaware Code.

By submission of this proposal, each bidder and each person signing on behalf of any bidder, certifies as to its own organization, under penalty of perjury, that to the best of each signer's knowledge and belief:

1. The prices in this proposal have been arrived at independently without collusion, consultation, communication, or Agreement with any other bidder or with any competitor for the purpose of restricting competition.
2. Unless required by law, the prices which have been quoted in this proposal have not been knowingly disclosed and will not knowingly be disclosed by the bidder, directly or indirectly, to any other bidder or competitor prior to the opening of proposals.
3. No attempt has been made or will be made by the bidder to induce any other person, partnership, or corporation to submit or not to submit a proposal for the purpose of restricting competition.

I/We acknowledge receipt and incorporation of addenda to this proposal as follows:

No.	Date								
_____	_____	_____	_____	_____	_____	_____	_____	_____	_____

BIDDERS MUST ACKNOWLEDGE RECEIPT OF ALL ADDENDA

MUST INSERT DATE OF FINAL QUESTIONS AND ANSWERS ON WEBSITE: _____



AFFIRMATION:

Within the past five (5) years, has your firm, any affiliate, any predecessor company or entity, owner, Director, officer, partner or proprietor been the subject of a Federal, State, Local government suspension or debarment?

YES _____ NO _____ if yes, please explain _____

Sealed and dated this _____ day of _____ in the year of our Lord two thousand _____ (20____).

Name of Bidder (Organization)

Corporate
Seal

By:

Authorized Signature

Attest _____

Title

SWORN TO AND SUBSCRIBED BEFORE ME this _____ day of _____, 20____.

Notary
Seal

Notary

CANNOT BE USED FOR BIDDING

BID BOND

TO ACCOMPANY PROPOSAL
(Not necessary if security is used)

KNOW ALL MEN BY THESE PRESENTS That: _____
of _____ in the County of _____ and State of _____ as

Principal, and _____ of _____ in the County
of _____ and State of _____ as **Surety**, legally authorized to do business in the State of

Delaware ("**State**"), are held and firmly unto the **State** in the sum of _____
_____ Dollars (\$ _____), or _____ percent not to exceed

_____ Dollars (\$ _____) of amount of bid on Contract
No. T201406802.02, to be paid to the **State** for the use and benefit of its Department of Transportation ("**DeIDOT**") for
which payment well and truly to be made, we do bind ourselves, our and each of our heirs, executors, administrators, and
successors, jointly and severally for and in the whole firmly by these presents.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH That if the above bounden **Principal** who has
submitted to the **DeIDOT** a certain proposal to enter into this contract for the furnishing of certain materiel and/or services
within the **State**, shall be awarded this Contract, and if said **Principal** shall well and truly enter into and execute this
Contract as may be required by the terms of this Contract and approved by the **DeIDOT**, this Contract to be entered into
within twenty days after the date of official notice of the award thereof in accordance with the terms of said proposal, then
this obligation shall be void or else to be and remain in full force and virtue.

Sealed with _____ seal and dated this _____ day of _____ in the year of our Lord
two thousand and _____ (20____).

SEALED, AND DELIVERED IN THE
presence of

Name of Bidder (Organization)

Corporate
Seal

By: _____
Authorized Signature

Attest _____

Title

Name of **Surety**

Witness: _____

By: _____

Title