



DEPARTMENT OF TRANSPORTATION  
OFFICE OF TRANSPORTATION SOLUTIONS  
PLANS AND SPECIFICATIONS FOR

CONTRACT NUMBER- T201203102 NORTH MAINTENANCE

FEDERAL AID NUMBER- NONE

CONTRACT TITLE- COMMUNITY TRANSPORTATION FUND, NORTH II, 2012 OPEN END

PLANS PREPARED BY: [Signature]  
DESIGN TECHNICIAN

DATE RECOMMENDED: 12/13/11

[Signature]  
PUBLIC WORKS ENGINEER:

DATE RECOMMENDED: 12/15/11



[Signature]  
MAINTENANCE ENGINEER:

DATE RECOMMENDED: 12-14-11

[Signature]  
CONTRACTS ENGINEER:

DATE APPROVED: 12/21/11

[Signature]  
DISTRICT ENGINEER:

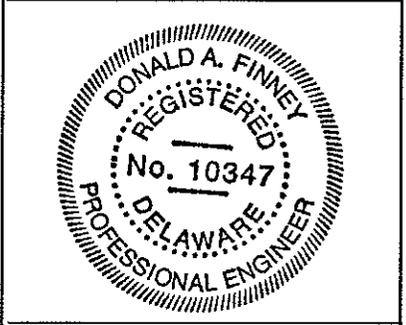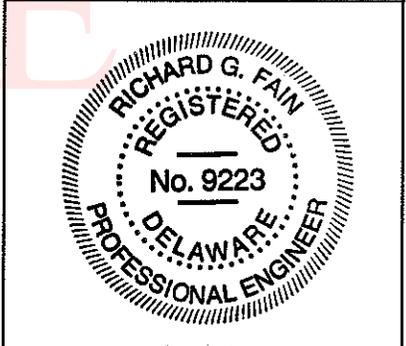

UNOFFICIAL  
WEBSITE  
COPY


DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102

PAGE 2 OF 33

VARIOUS LOCATIONS

LOCATION MAP

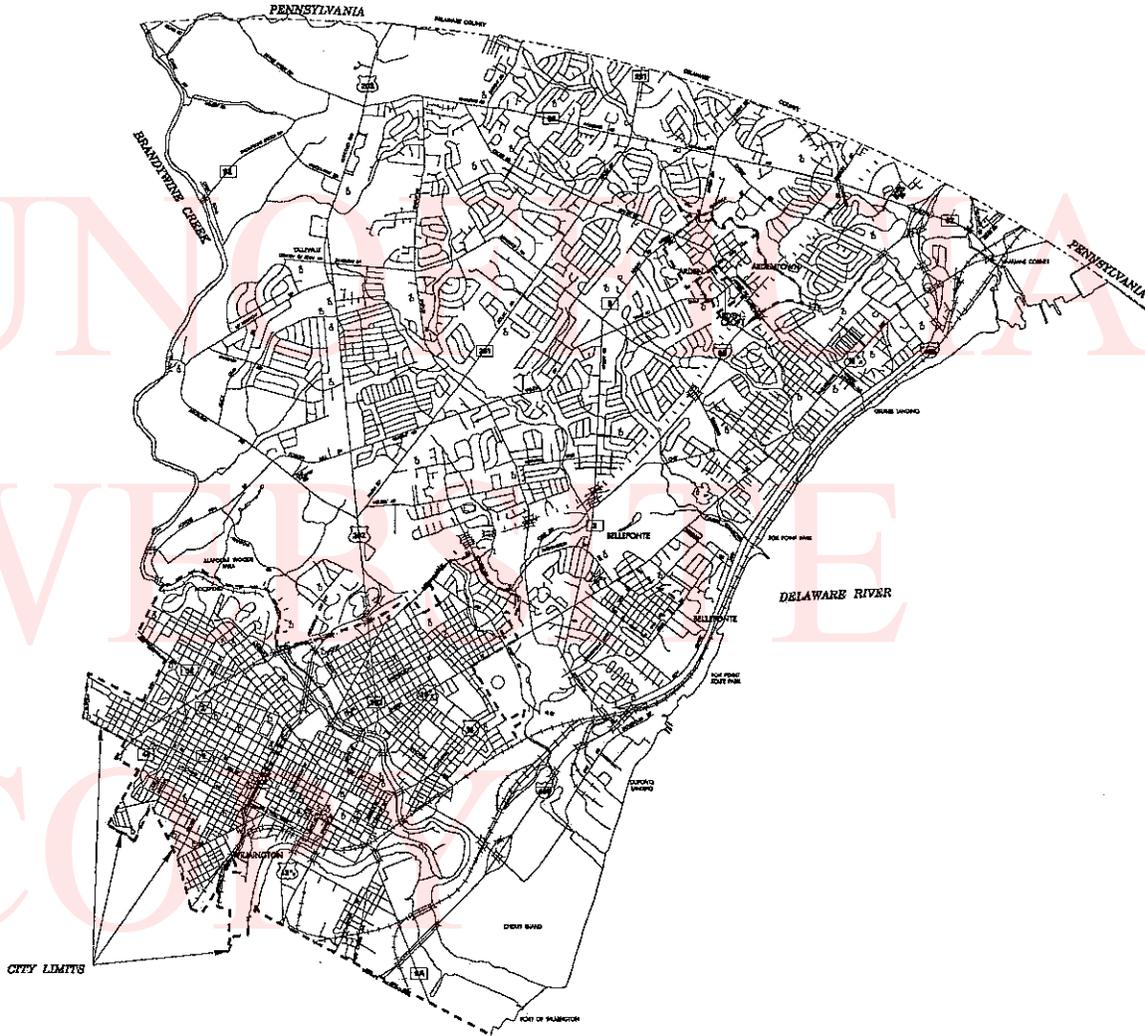

MOBILIZATION ZONE-1


DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102

PAGE 3 OF 33

VARIOUS LOCATIONS

LOCATION MAP

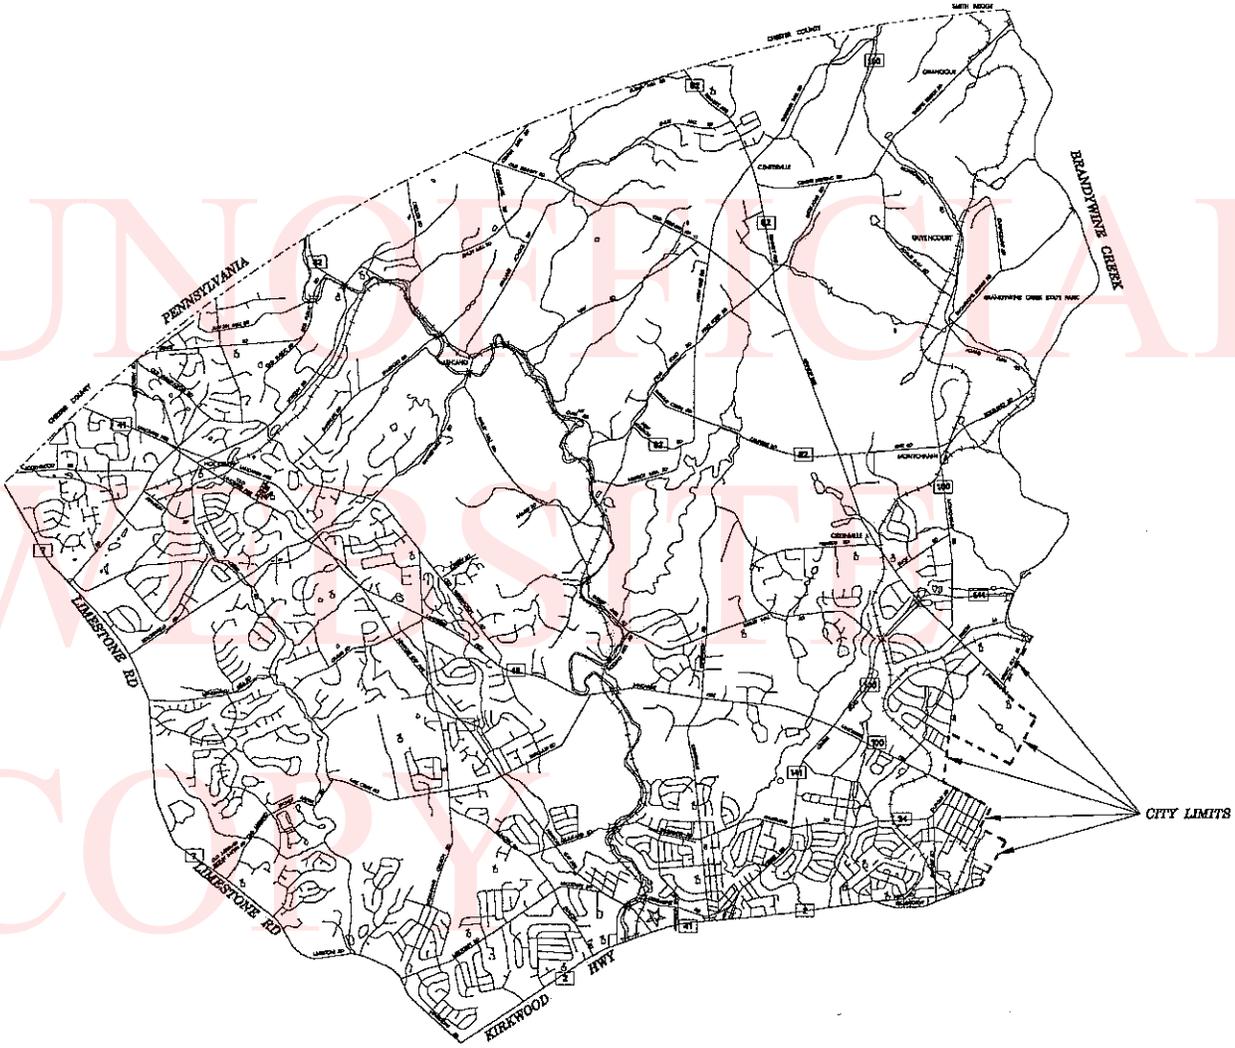

MOBILIZATION ZONE-2

DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102

PAGE 4 OF 33

VARIOUS LOCATIONS

LOCATION MAP



MOBILIZATION ZONE-3


DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102

PAGE 5 OF 33

VARIOUS LOCATIONS

LOCATION MAP

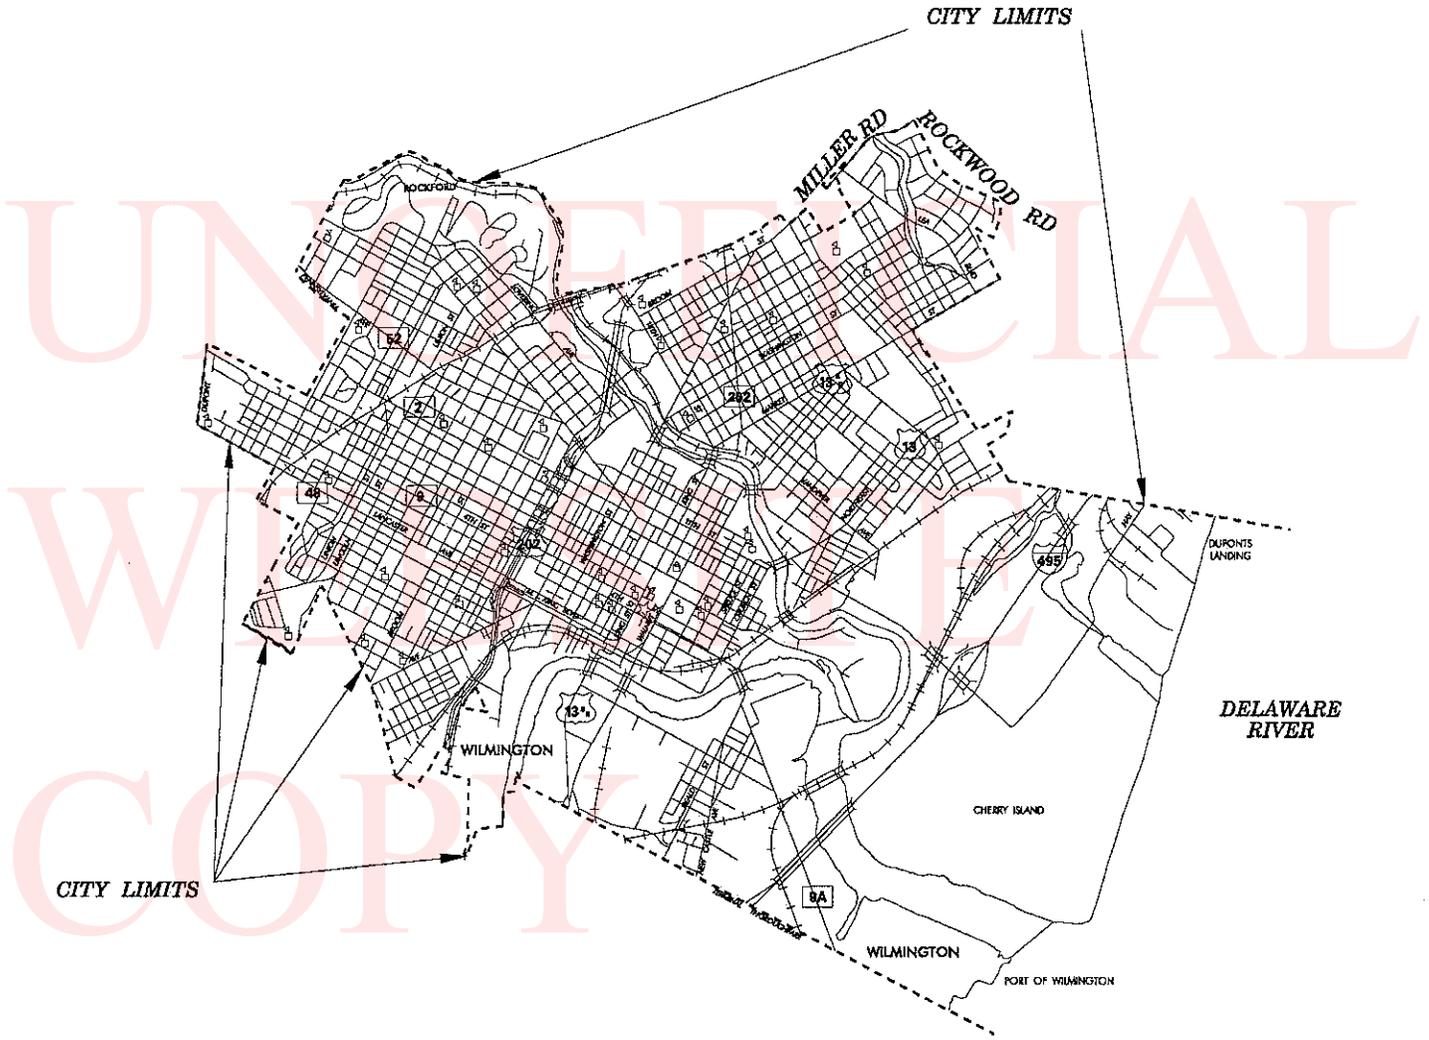

MOBILIZATION ZONE-4

DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102

PAGE 6 OF 33

VARIOUS LOCATIONS

LOCATION MAP



MOBILIZATION ZONE-5

DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102

PAGE 7 OF 33

VARIOUS LOCATIONS

LOCATION MAP



MOBILIZATION ZONE-6


DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102

PAGE 8 OF 33

VARIOUS LOCATIONS

LOCATION MAP

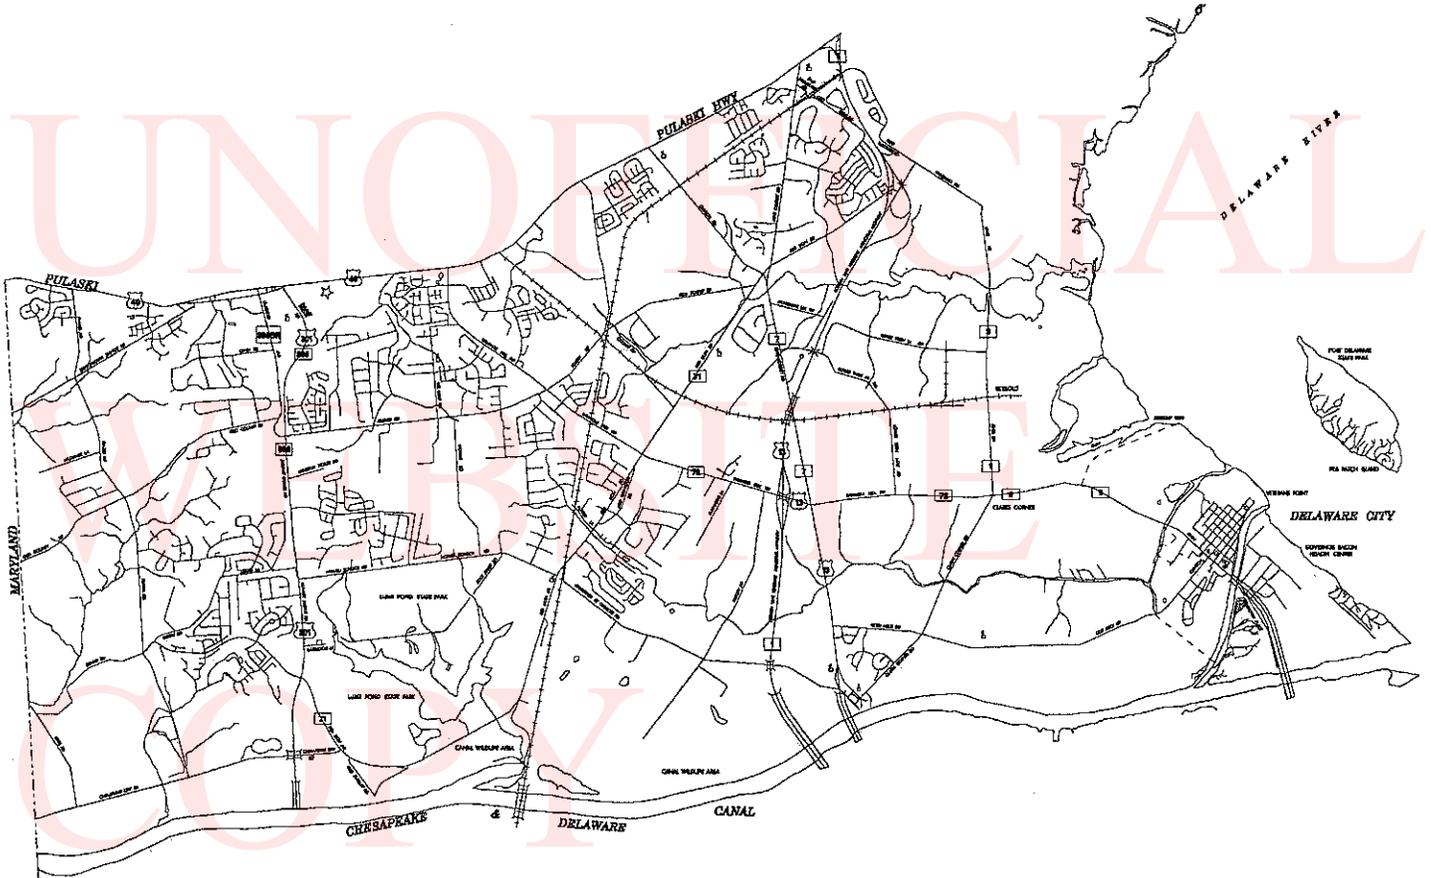

MOBILIZATION ZONE-7


DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102

PAGE 9 OF 33

VARIOUS LOCATIONS

LOCATION MAP

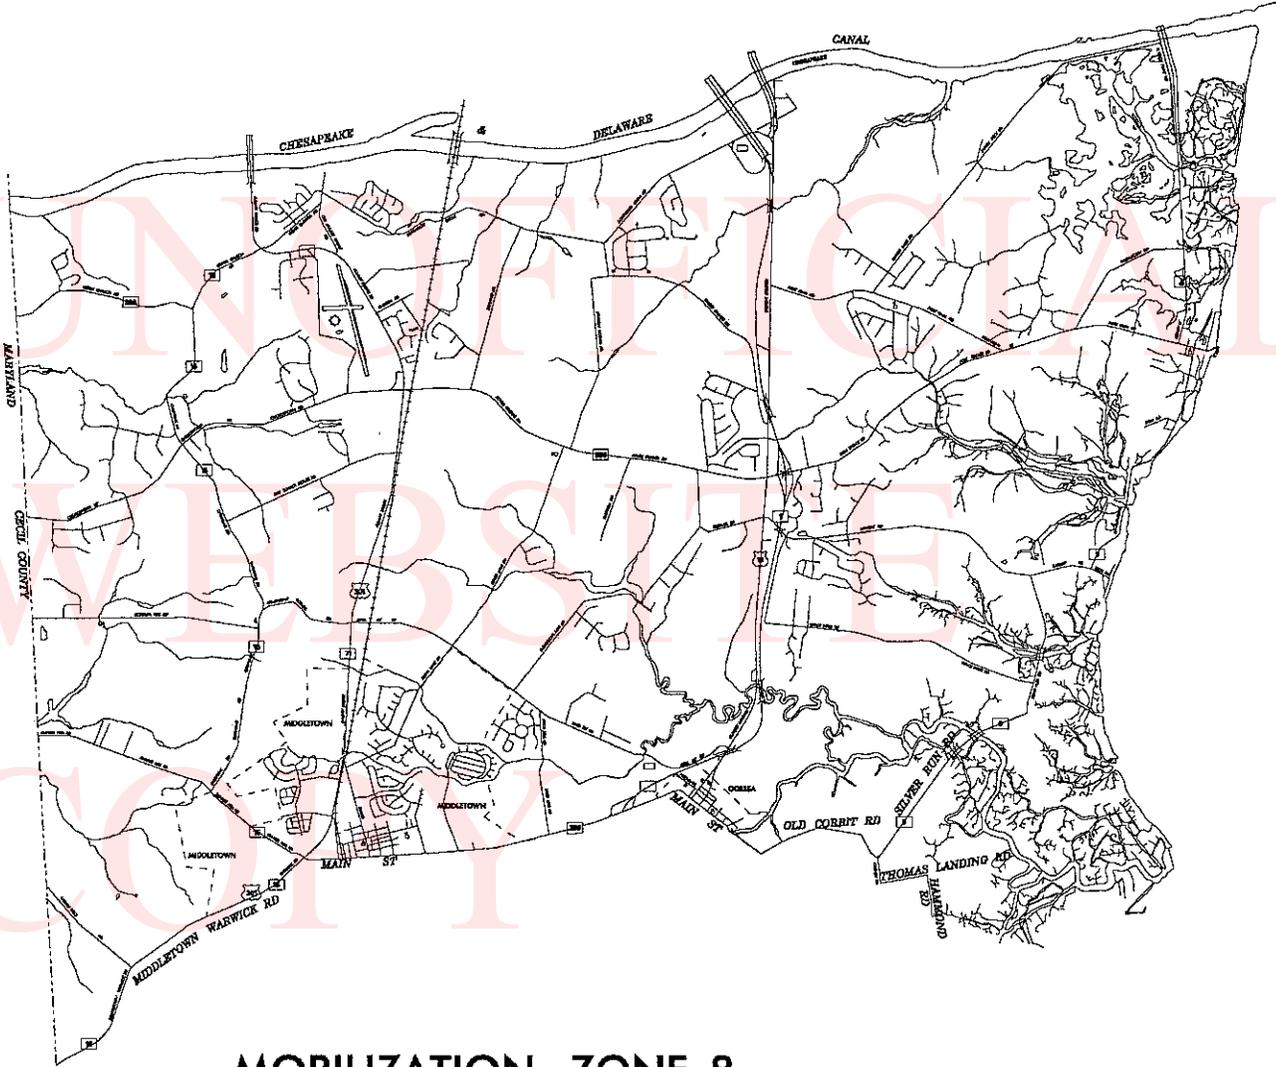

MOBILIZATION ZONE-8



COMMUNITY TRANSPORTATION FUND, NORTH II, 2012 OPEN END

---

GENERAL CONTRACT PLAN NOTES

**SECTION 100**

1. THIS PROJECT IS TO BE CONSTRUCTED IN ACCORDANCE WITH THE DELAWARE DEPARTMENT OF TRANSPORTATION STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION DATED AUGUST 2001 AND THE DELAWARE DEPARTMENT OF TRANSPORTATION STANDARD CONSTRUCTION DETAILS, DATED 2001 INCLUDING ALL REVISIONS UP TO THE DATE OF ADVERTISEMENT.
2. THE PURPOSE OF THIS CONTRACT IS TO MAKE GENERAL IMPROVEMENTS TO ROADS AND/OR STREETS WITHIN THE DISTRICT HEREIN SPECIFIED. DEPENDING ON FUND AVAILABILITY, THE DEPARTMENT RESERVES THE RIGHT TO ADD OR DELETE LOCATIONS AND/OR QUANTITIES FOR THIS CONTRACT. SUCH ADDITIONS OR DELETIONS SHALL NOT BE CAUSE FOR AN INCREASE OR DECREASE IN ANY CONTRACT UNIT BID PRICES. NO ITEM PRICES ARE TO BE RENEGOTIATED DUE TO EITHER AN INCREASE OR DECREASE IN QUANTITY USAGE RESULTING FROM SAID ADDITIONS OR DELETIONS.
3. LOCATION LISTINGS INDICATE GENERAL LIMITS OF CONSTRUCTION, MAJOR TYPES OF IMPROVEMENTS, AND ESTIMATED QUANTITIES. DURING THE BIDDING PERIOD, ANY QUESTIONS PERTAINING TO LOCATIONS SHALL BE DIRECTED TO THE CONTRACT ADMINISTRATOR. AFTER THE AWARD, SUCH QUESTIONS SHALL BE REFERRED TO THE APPROPRIATE DISTRICT ENGINEER OR HIS REPRESENTATIVE.
4. THE CONTRACTOR SHALL SUBMIT THE REQUIRED COPIES OF A DETAILED PROGRESS SCHEDULE (PSC) AS OUTLINED IN STANDARD SPECIFICATION 108.04 PRIOR TO OR AT THE PRECONSTRUCTION MEETING. DETAILS SHALL INCLUDE A DESCRIPTION OF EACH WORK ACTIVITY, THE PLANNED DAYS OF WORK, MULTIPLE CREWS OR SHIFTS, AND SCHEDULED WORKING HOURS. DURING THE CONTRACT, THE CONTRACTOR SHALL SUBMIT TWO-WEEK (OR AS REQUIRED) "LOOK AHEAD" SCHEDULES TO THE AREA ENGINEER/MANAGER NO LATER THAN NOON OF EACH THURSDAY. FAILURE TO COMPLY WILL RESULT IN A SUSPENSION OF ALL CONTRACT WORK WITH TIME CHARGES CONTINUING TO BE ASSESSED.
5. THE CONTRACTOR IS REMINDED THAT SECTION 105.07 OF THE STANDARD SPECIFICATIONS REQUIRES THE GENERAL CONTRACTOR TO HAVE A COMPETENT SUPERINTENDENT OR FOREMAN ON THE PROJECT AT ALL TIMES.

**SECTION 300**

6. SECTION 302007, GRADED AGGREGATE BASE COURSE TYPE B, SHALL BE USED AS BASE MATERIAL FOR NEW CONSTRUCTION OF P.C.C. CURBS, SIDEWALK, AND VALLEY GUTTER.

**SECTION 400**

7. THE COST OF CLIPPING BACK THE EDGES OF THE ROADWAY, SHOULDERS, AND THE FIRST 3' OF UNPAVED DRIVEWAY ENTRANCES, PICKING UP AND DISPOSING OF WASTE AND EXCESS MATERIAL, AND CLEANING THE EXISTING PAVEMENT PRIOR TO AN OVERLAY SHALL BE INCIDENTAL TO SECTION 401(.). PREPARING UNPAVED DRIVEWAY ENTRANCES BEYOND THE FIRST 3' SHALL BE PAID UNDER THE APPROPRIATE CONTRACT ITEMS: 202000 AND/OR 30200X. UNLESS SPECIFIED, OVERLAY WIDTHS SHALL MATCH EXISTING WIDTHS.
8. AS DIRECTED BY THE DELDOT MATERIALS AND RESEARCH SECTION, LIFT THICKNESS WILL CONFORM TO THE FOLLOWING MINIMUM AND MAXIMUM DEPTHS. TYPE C: 1.25" to 2.00"; TYPE B: 2.25" to 3.00"; BCBC: 3.00" to 6.00".

COMMUNITY TRANSPORTATION FUND, NORTH II, 2012 OPEN END

---

GENERAL CONTRACT PLAN NOTES

**SECTION 700**

9. PAYMENT FOR SECTION 762001 - SAW CUTTING HOT MIX SHALL BE A SEPARATE PAY ITEM WHETHER OR NOT AN OVERLAY IS A PART OF THE PROPOSED IMPROVEMENTS (WITH THE EXCEPTION OF BUTT JOINTS, DETAILS, AND NOTES TO THE CONTRARY).

10. BUTT JOINTS SHALL BE CONSTRUCTED AT ALL INTERSECTING HOT MIX ROADS AND ANY OTHER LOCATIONS AS DIRECTED BY THE ENGINEER. BUTT JOINTS AT RAILROAD CROSSINGS AND AT BRIDGE OR DRAINAGE STRUCTURES NOT TO BE RESURFACED SHALL BE AS PER THE INCLUDED PLAN DETAIL. BUTT JOINTS CUT PRIOR TO THE DAY OF THE PAVEMENT OVERLAY SHALL BE RAMPED WITH HOT MIX TRM INCIDENTAL TO ITEM 761001 BUTT JOINT. ONLY HOT MIX WILL BE ALLOWED FOR THIS PURPOSE. BUTT JOINTS, IN FULL MILL AREAS SHALL BE INCIDENTAL TO THE PAVEMENT MILLING ITEM. ALL HOT MIX TRM SHALL BE REMOVED PRIOR TO THE PAVING OPERATION.

11. WHERE IMPROVEMENTS CALL FOR PLACEMENT OF A 3.5" (90 mm) HOT MIX OVERLAY IT SHALL BE INTERPRETED AS 2 SEPARATE LIFTS. (1.25" (30 mm) TYPE C HOT MIX PLACED OVER 2.25" (60 mm) OF TYPE B HOT MIX)

12. TAPER MILL IMPLIES PAVEMENT MILLING IN THE AREA OF FIXED STRUCTURES, SUCH AS CURBING, WHERE THE MILLED DEPTH AT THE STRUCTURE WILL BE THE DEPTH OF THE PROPOSED OVERLAY AND ZERO INCHES (ZERO mm) AT 6 FEET +/- (2 METERS +/- ) AWAY FROM THE STRUCTURE. MILLED DEPTH COMPUTATION WILL BE THE AVERAGE OF THESE TWO.

13. MILLED MATERIAL, SHALL BECOME THE PROPERTY OF THE CONTRACTOR. LATERAL GRADE ADJUSTMENTS IN FULL WIDTH PAVEMENT MILLING OPERATIONS SHALL BE PAID UNDER ITEM 760000 OR 760006 WHICHEVER IS SPECIFIED OR DIRECTED BY THE ENGINEER AT THAT PARTICULAR LOCATION.

14. AFTER PAVEMENT MILLING, ALL RAISED EDGES OF MANHOLES, DRAINAGE INLETS, WATER VALVE BOXES, ETC. SHALL BE RAMPED WITH HOT MIX TRM AT A 20:1 OR FLATTER SLOPE INCIDENTAL TO ITEM 760507 PROFILE MILLING. ALL ADJUSTMENTS SHALL BE MADE NOT MORE THAN SEVEN (7) CALENDER DAYS PRIOR TO THE PLACEMENT OF THE FINAL COURSE OF HOT-MIX PAVEMENT UNLESS OTHERWISE DIRECTED BY THE ENGINEER. FAILURE TO COMPLY WILL RESULT IN A SUSPENSION OF ALL OTHER CONTRACT WORK WITH TIME CHARGES CONTINUING TO BE ASSESSED. PAVEMENT MILLING OR COLD PATCH MATERIAL WILL NOT BE ALLOWED FOR THIS PURPOSE. ALL HOT MIX TRM SHALL BE REMOVED PRIOR TO THE PAVING OPERATIONS.

15. PAVING IS TO BE COMPLETED CURB TO CURB INCLUDING TURN LANES AND INTERSECTIONS WITHIN SEVEN (7) CALENDER DAYS OF PAVEMENT MILLING FOR A PARTICULAR DAYS PAVEMENT MILLING LOCATION. THIS RESTRICTION APPLIES TO EACH DAYS PAVEMENT MILLING OPERATION, NOT AN ENTIRE PROJECT LOCATION. FAILURE TO COMPLY WILL RESULT IN A SUSPENSION OF ALL OTHER CONTRACT WORK WITH TIME CHARGES CONTINUING TO BE ASSESSED.

16. THE CONTRACTOR SHALL TAKE CARE IN REMOVING PAVEMENT AROUND UTILITIES, BUTT JOINTS, CURB EDGES, ETC., WHEN CLEANING AFTER A PAVEMENT MILLING OPERATION. CARE SHOULD BE TAKEN SO AS NOT TO GOUGE OR DIG DEEPER THAN THE REQUIRED DEPTH. FAILURE TO DO SO WILL RESULT IN THE CONTRACTOR PLACING LEVELING COURSES AT HIS OWN EXPENSE.

17. THE BASIS OF MEASURMENT AND PAYMENT FOR ITEM 760006 - PAVEMENT MILLING, 2" (50 mm) DEPTH,

COMMUNITY TRANSPORTATION FUND, NORTH II, 2012 OPEN END

---

GENERAL CONTRACT PLAN NOTES

SHALL INCLUDE AN AVERAGE OF THE MILLED DEPTH PER LOCATION FROM 1" (25 mm) TO 2.25" (56 mm) (INCLUSIVE) FOR MEASUREMENT AND PAYMENT PURPOSES. PAYMENT FOR PAVEMENT MILLING DEPTHS WHOSE AVERAGE IS GREATER THAN 2.25" (56 mm) SHALL BE NEGOTIATED BY THE ENGINEER.

**18.** WHERE IMPROVEMENTS CALL FOR HOT MIX MILLING AND OVERLAY BOTH SHALL BE INTERPRETED AS A TWO-INCH DEPTH UNLESS NOTED DIFFERENTLY IN THE CONTRACT LOCATION OR OTHERWISE DIRECTED BY THE ENGINEER OR HIS DESIGNEE.

**19.** DRAINAGE INLET GRATES ADJACENT TO THE ROAD, WITHIN THE PROJECT LIMITS, WHICH ARE NOT TYPE 1 SHALL BE REPLACED. THE ACTUAL LOCATIONS, THE NEED FOR ANY GRATE MODIFICATIONS OR FOR NEW FRAMES SHALL BE DETERMINED BY THE ENGINEER. ALL REPLACED GRATES/ FRAMES SHALL BE DELIVERED TO THE NEAREST DISTRICT MAINTENANCE YARD WITH THE COST OF DELIVERY INCIDENTAL TO 708500 REPLACING CATCH BASIN GRATES. FINAL PAYMENT FOR REPLACED GRATES/ FRAMES SHALL NOT BE MADE UNTIL RECEIPT OF DELIVERED MATERIALS IS PRODUCED, SIGNED BY A DELDOT MAINTENANCE YARD SUPERVISOR.

**20.** EXCAVATION FOR THE REPLACEMENT OF P.C.C. CURBS, SIDEWALK OR VALLEY GUTTER SHALL BE INCIDENTAL TO THE PRICE BID FOR THESE RESPECTIVE ITEMS. EXCAVATED MATERIAL, NOT NEEDED ON THE PROJECT, SHALL BECOME THE PROPERTY OF THE CONTRACTOR AND REMOVED FROM THE PROJECT. IN THE CASE OF NEW SIDEWALK EXCAVATION WILL BE PAID TO THE WIDTH OF THE NEW SIDEWALK UNDER ITEM 202000. ITEM 732500, TOPSOIL, SHALL BE USED AS BACKFILL MATERIAL FOR CURB AND SIDEWALK WHEN SO DIRECTED BY THE ENGINEER. WHEN REPLACEMENT OF CURB AND GUTTER HAS BEEN COMPLETED AND THE FORMS REMOVED AT EACH LOCATION OF THIS CONTRACT, BACKFILLING SHALL BE DONE IMMEDIATELY. COMPLETE RESTORATION, TOPSOIL, SEEDING, AND REMOVAL OF ALL MATERIALS FOR CURB & GUTTER OR SIDEWALK; SEALING OF VALLEY GUTTERS AND PARGING OF DRAINAGE INLETS, SHALL BE COMPLETED WITHIN SEVEN (7) CALENDER DAYS. FAILURE TO COMPLY WILL RESULT IN A SUSPENSION OF ALL OTHER CONTRACT WORK WITH TIME CHARGES CONTINUING TO BE ASSESSED. TOPSOIL SHALL BE SCREENED/SIFTED SO AS NO MATERIAL GREATER THAN .5" SHOULD BE PRESENT IN MATERIAL USED FOR BACKFILL.

**21.** CURB RAMPS SHALL BE INSTALLED, AT ALL INTERSECTIONS WHERE REQUIRED, IN COMPLIANCE WITH THE MOST CURRENT DELAWARE STANDARD CONSTRUCTION DETAILS AT ALL EXISTING SIDEWALK LOCATIONS WITHIN THE LIMITS OF THE PROJECT AS DIRECTED BY THE ENGINEER IN THE FIELD. PAYMENT SHALL BE INCLUDED IN THE UNIT PRICE BID FOR THE APPROPRIATE CURB RAMP TYPE.

**22.** AS DIRECTED BY THE ENGINEER, THE CONTRACTOR SHALL PARTIALLY SAW AND FILL WITH AN APPROVED SEALER EXISTING CRACKED CURB AND/OR SIDEWALK. THIS WORK WILL BE INCIDENTAL TO ITEM #762002 SAWCUT - CONCRETE FULL DEPTH.

**23.** PERTAINING TO PCC & PATCHING, SAWCUTTING IS TO BE PERFORMED PRIOR TO THE REMOVAL OF HOT MIX UNLESS APPROVAL IS GIVEN BY THE ENGINEERS REPRESENTATIVE.

**24.** AT EACH LOCATION, THE CONTRACTOR SHALL NOTE ALL EXISTING PAVEMENT MARKINGS AND SUBMIT A DRAWING WHICH DEPICTS THE STRIPING PATTERN TO THE DEPARTMENT PRIOR TO THE START OF ANY WORK AT THE LOCATION. INTERNATIONAL ("PIANO KEY") CROSSWALK SYMBOLS CONSISTENT WITH THE MOST CURRENT DELAWARE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES WILL BE PLACED AT ALL EXISTING

COMMUNITY TRANSPORTATION FUND, NORTH II, 2012 OPEN END

---

**GENERAL CONTRACT PLAN NOTES**

CROSSWALK LOCATIONS OR AS DIRECTED BY THE ENGINEER. PAYMENT WILL BE UNDER THE APPLICABLE STRIPING ITEMS. THE CONTRACTOR WILL BE RESPONSIBLE TO CORRECT ANY ERRONEOUS MARKINGS IMMEDIATELY. FAILURE TO COMPLY WILL RESULT IN SUSPENSION OF ALL OTHER CONTRACT WORK WITH TIME CHARGES CONTINUING TO BE ASSESSED. FINAL PAVEMENT MARKINGS SHALL CONFORM TO ALL EXISTING PATTERNS AND SHALL BE PLACED WITHIN FIVE (5) CALENDER DAYS (MAXIMUM) AFTER PLACEMENT OF THE FINAL COURSE OF HOT MIX. IF THE CONTRACTOR FAILS TO DOCUMENT THE EXISTING PAVEMENT MARKINGS IN AN ACCEPTABLE MANNER, HE SHALL BE REQUIRED TO PROVIDE AT HIS OWN EXPENSE, A NEW PAVEMENT MARKING PLAN SIGNED AND SEALED BY A PROFESSIONAL ENGINEER REGISTERED IN THE STATE OF DELAWARE.

AT THE END OF EACH DAYS OPERATION AND BEFORE TRAFFIC IS RETURNED TO UNRESTRICTED ROADWAY USE, TEMPORARY MARKINGS SHALL BE UTILIZED AT LOCATIONS THAT REQUIRE PERMANENT MARKING, WHEN:

- A. EXISTING PAVEMENT IS MILLED AND HOT MIX WILL NOT BE PLACED THE SAME DAY;
- B. MORE THAN A SINGLE COURSE OF HOT MIX IS TO BE PLACED
- C. PERMANENT ROADWAY STRIPING CANNOT BE PLACED ON THE SAME DAY AS THE PLACEMENT OF THE FINAL COURSE OF HOTMIX.

TEMPORARY PAVEMENT STRIPING MUST MATCH PERMANENT PAVEMENT STRIPING IN ALL REGARDS. TEMPORARY PAVEMENT MARKINGS SHALL BE PAID AT THE APPLICABLE CONTRACT UNIT PRICE. THE CONTRACTOR IS RESPONSIBLE FOR MAINTAINING THE TEMPORARY MARKINGS IN GOOD CONDITION SUCH THAT THE PAVEMENT IS PROPERLY DELINEATED AT ALL TIMES. ANY REFRESHING OF THE TEMPORARY MARKINGS WILL BE AT THE CONTRACTOR'S EXPENSE.

PLACEMENT OF TEMPORARY MARKINGS SHALL RECEIVE PRIOR APPROVAL FROM THE ENGINEER. PAYMENT FOR TEMPORARY PAVEMENT MARKING SHALL BE MADE AT THE UNIT PRICE BID FOR ITEM 748(xxx) - TEMPORARY MARKINGS, FOR CONDITIONS A ,B & C LISTED ABOVE.

ALL TEMPORARY OR PERMANENT WARNING SIGNS WILL BE COVERED WITH RETROFLECTIVE FLORESCENT SHEETING ON ALUMINUM PANELS, ELIMINATING THE NEED FOR TYPE "B" WARNING LIGHTS ON THESE SIGNS. ALL OF THESE SIGNS SHALL BE MOUNTED ON BREAKAWAY POSTS SUCH THAT THE BOTTOM OF THE SIGN IS 7 FEET ABOVE THE GROUND UNLESS OTHERWISE AUTHORIZED BY THE ENGINEER.

**25.** THE CONTRACTOR, WITH THE ENGINEER, SHALL INVENTORY ALL SIGNS ON ALL ROADS SUBJECT TO IMPROVEMENTS. NECESSARY SIGNS SHALL BE MAINTAINED IN OPERATION DURING CONSTRUCTION AND ANY OTHER SIGNS SHALL BE PROPERLY STORED WITH THE CONTRACTOR, WHO SHALL BE RESPONSIBLE FOR LOSS OR DAMAGE. IMMEDIATELY PRIOR TO FINAL INSPECTION, THE CONTRACTOR AND ENGINEER SHALL AGAIN INVENTORY THE TRAFFIC SIGNS AND ACCOUNT FOR ANY LOST OR DAMAGED SIGNS. LOST OR DAMAGED SIGNS, AT THE DISCRETION OF THE ENGINEER SHALL BE REPLACED IN KIND AT THE CONTRACTORS EXPENSE.

**26.** WORK SHALL BE PERFORMED IN A MANNER THAT WILL REASONABLY PROVIDE THE LEAST PRACTICAL OBSTRUCTION TO ALL ROAD USERS, INCLUDING VEHICULAR, PEDESTRIAN, AND BICYCLE TRAFFIC, AND SHALL CONFORM WITH THE REQUIREMENTS OF THE MOST CURRENT DELAWARE MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (MUTCD) PART 6, HEREIN REFERRED TO AS THE TRAFFIC CONTROL MANUAL (INCLUDING REVISIONS IN EFFECT AT THE TIME OF ADVERTISEMENT FOR BIDS).

COMMUNITY TRANSPORTATION FUND, NORTH II, 2012 OPEN END

---

**GENERAL CONTRACT PLAN NOTES**

27. THE CONTRACTOR SHALL PROVIDE RESIDENTS WITH 24 HR. PRIOR WRITTEN NOTICE FOR ALL PHASES OF CONTRACT WORK INCLUDING BUT NOT LIMITED TO: SAWCUTTING FOR P.C.C. OPERATIONS, P.C.C. REMOVAL AND REPLACEMENT, PAVEMENT MILLING, AND PAVING. THIS NOTICE SHALL BE GIVEN TO ALL RESIDENTS WHOSE PROPERTY IS ADJACENT TO THE STREET ON WHICH WORK IS TO BE PERFORMED. FAILURE TO GIVE PROPER NOTICE WILL RESULT IN A SUSPENSION OF WORK REQUIRING NOTICE, UNTIL PROPER NOTICE IS PROVIDED.

28. BEFORE THE START OF A DAYS PAVEMENT MILLING OR PAVING OPERATIONS AND WHERE THERE IS EXISTING STRIPING, THE CONTRACTOR SHALL BE REQUIRED TO PROVIDE PROOF THAT ENOUGH MATERIAL OF AN APPROVED ALTERNATIVE STRIPING METHOD IS ON HAND AT THE SITE TO ENSURE STRIPING IS COMPLETE BEFORE TRAFFIC IS RETURNED TO THE ROADWAY.

29. SEEDING IN SUBDIVISIONS SHALL CONFORM TO 734.03 OF THE STANDARD SPECIFICATIONS - PERMANENT GRASS SEEDING SUBDIVISION CHART.

30. LANE CLOSURES ON NUMBERED MAINTENANCE ROADS ARE PERMITTED ONLY BETWEEN THE HOURS OF 9:00 AM AND 3:00 PM.

31. BEFORE WORK IS DONE AT ANY LOCATION, THE APPROPRIATE DISTRICT SAFETY OFFICER MUST APPROVE THE MOT FOR THAT LOCATION. ANY ANTICIPATED IMPACT TO TRAFFIC SIGNALS MUST BE REVIEWED BY THE DELDOT TRAFFIC SECTION PRIOR TO CONSTRUCTION. THEY CAN BE CONTACTED AT 302-659-4060.

32. ANY ERRONEOUS MARKING WILL NOT BE PAID FOR AND SHALL BE CORRECTED IMMEDIATELY AT THE CONTRACTORS EXPENSE. ERRONEOUS MARKINGS OR SHADOWS THAT EXCEED ONE (1) INCH IN WIDTH SHALL BE REMOVED BY EITHER SAND OR WATER BLASTING. NO OTHER REMOVAL METHODS WILL BE ALLOWED. A FLAT BLACK PAINT OR DRIVEWAY SEALER SHALL BE APPLIED IN THE AREA OF THE REMOVED MARKING TO MASK THE REPAIR. ANY DAMAGE TO THE PAVEMENT CAUSED BY REMOVAL OF ERRONEOUS MARKINGS SHALL BE REPAIRED / REPLACED TO THE SATISFACRTION OF THE ENGINEER AT THE CONTRACTORS EXPENSE.

33. THE CONTRACTOR SHALL SUBMIT A TRAFFIC CONTROL PLAN, INCLUDING THE NECESSARY NCHRP 350 CERTIFICATIONS FOR ALL DEVICES THAT WILL BE UTILIZED, FOR EACH LOCATION BEFORE THE START OF THE PRE-CONSTRUCTION MEETING. WRITTEN APPROVAL MUST BE RECEIVED BEFORE THE START OF WORK AT EACH AND EVERY LOCATION.

34. ALL TRAFFIC CONTROL DEVICES SHALL BE IN NEW OR REFURBISHED CONDITION AND SHALL BE IN COMPLIANCE WITH THE TRAFFIC CONTROL MANUAL AND NCHRP 350 AS DEFINED IN SECTION "A" OF THE MANUAL. THE DEVICES SHALL BE APROVED BY THE SAFETY SECTION PRIOR TO USE AND SHALL BE MAINTAINED IN GOOD CONDITION FOR THE DURATION OF THE CONTRACT.

**OPEN END SPECIFIC PROJECT NOTES**

35. NO UTILITY RELOCATION INVOLVEMENT IS ANTICIPATED. SHOULD ANY CONFLICTS BE ENCOUNTERED DURING CONSTRUCTION REQUIRING ADJUSTMENT AND/OR RELOCATION OF THE AGENCIES' EXISTING FACILITIES, THE NECESSARY RELOCATION WORK SHALL BE ACCOMPLISHED BY THE RESPECTIVE AGENCIES' FORCES, AS DIRECTED BY THE DISTRICT ENGINEER. ANY ADJUSTMENTS AND/OR RELOCATIONS OF MUNICIPALLY

COMMUNITY TRANSPORTATION FUND, NORTH II, 2012 OPEN END

---

**GENERAL CONTRACT PLAN NOTES**

OWNED FACILITIES SHALL BE DONE BY THE STATE'S CONTRACTOR IN ACCORDANCE WITH THE RESPECTIVE AGENCIES' STANDARD SPECIFICATIONS AS DIRECTED BY THE DISTRICT ENGINEER.

36. NO ENVIRONMENTAL PERMITS ARE REQUIRED FOR THIS WORK PROVIDED NO JURISDICTIONAL WETLANDS OR WATERS ARE IMPACTED. IF THERE IS ANY QUESTION AS TO WHETHER OR NOT A WATER OR WETLAND IS JURISDICTIONAL, CONTACT THE DEL DOT ENVIRONMENTAL SECTION AT 302-760-2264.

37. IT IS ANTICIPATED THAT ALL WORK WILL OCCUR WITHIN DELDOT'S EXISTING RIGHT OF WAY OR EASEMENT AREAS. SHOULD THE NEED OCCUR TO TRESPASS ONTO PRIVATE PROPERTY; IT WILL BE THE RESPONSIBILITY OF THE PROJECT MANAGER TO SECURE SUCH TRESPASS NEEDS.

38. IT IS ANTICIPATED THAT ALL WORK WILL OCCUR WITHIN DELDOT'S RIGHT OF WAY. SHOULD THE NEED OCCUR TO TRESPASS ONTO RAILROAD PROPERTY, INCLUDING THE HIGHWAY-RAIL CROSSING; IT WILL BE THE RESPONSIBILITY OF THE PROJECT MANAGER TO CONTACT THE RAILROAD CHIEF ENGINEER AND OBTAIN WRITTEN AUTHORIZATION BEFORE ENTERING.

39. THE PROJECT MANAGER SHALL BE RESPONSIBLE FOR COORDINATING WITH THE TRAFFIC SECTION RELATING TO ANY IMPACTS TO TRAFFIC SECTION FACILITIES (INCLUDING BUT NOT LIMITED TO TRAFFIC LOOPS, JUNCTION WELLS ETC.) AT LEAST 4 WEEKS IN ADVANCE OF THE START OF THE ACTIVITY. PRIOR TO INITIATING ANY WORK ON THIS CONTRACT (OR SITES), THE PROJECT MANAGER SHALL BE RESPONSIBLE FOR PREPARING AND SUBMITTING FOR APPROVAL OF THE SAFETY SECTION, A MAINTENANCE OF TRAFFIC PLAN. SUFFICIENT TIME SHALL BE PROVIDED FOR THE REVIEW AND APPROVAL OF THE PLAN. THE MAINTENANCE OF TRAFFIC PLAN SHALL INCLUDE PROPOSED TIME RESTRICTIONS ON THE CLOSURE OF TRAVEL LANES SUBJECT TO THE APPROVAL OF THE SAFETY SECTION.

40. THE PROJECT MANAGER IS RESPONSIBLE FOR ENSURING ANY REQUIRED DOCUMENTS AND ANALYSIS AS PART OF THE ADOPTED WORK ZONE SAFETY AND MOBILITY PROCEDURES AND GUIDELINES HAS BEEN COMPLETED PRIOR TO ANY WORK STARTING ON THIS CONTRACT.


DELAWARE DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102

PAGE 17 OF 33


NORTH MAINTENANCE VARIOUS LOCATIONS

DETAILS SHEET

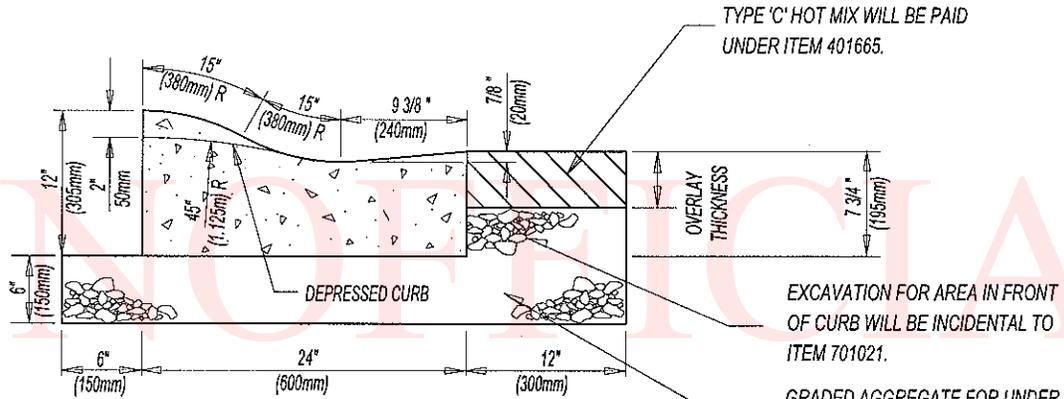

INTEGRAL P.C.C. CURB & GUTTER TYPE 2

N.T.S.

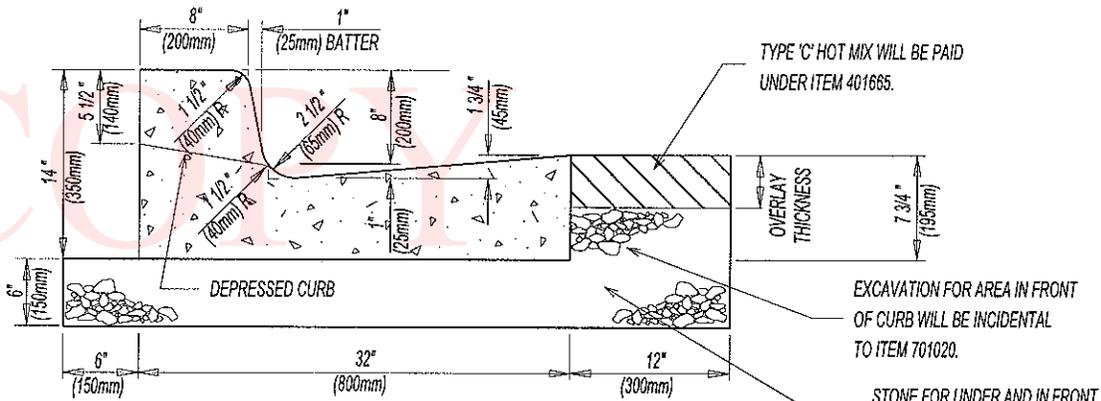

INTEGRAL P.C.C. CURB & GUTTER TYPE 1

N.T.S.



DELAWARE DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102

PAGE 18 OF 33

NORTH MAINTENANCE VARIOUS LOCATIONS

DETAILS SHEET

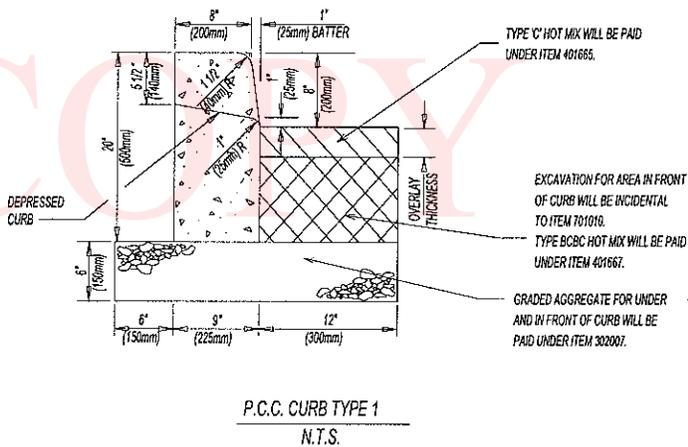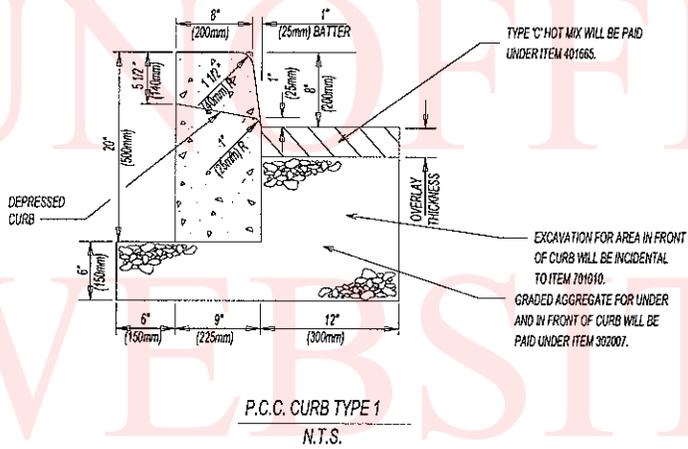


DELAWARE DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102

PAGE 19 OF 33


NORTH MAINTENANCE VARIOUS LOCATIONS

DETAILS SHEET

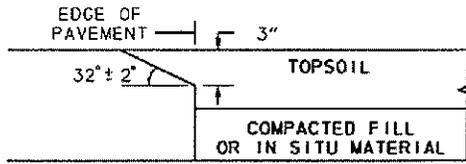


CONCRETE PAVEMENTS

N. T. S.

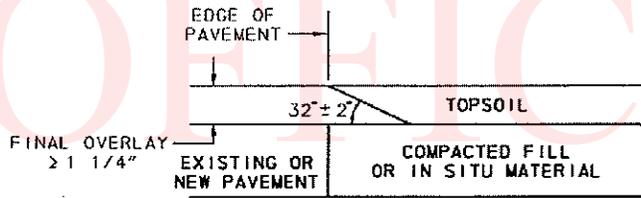

BITUMINOUS CONCRETE PAVEMENTS AND OVERLAYS

N. T. S.

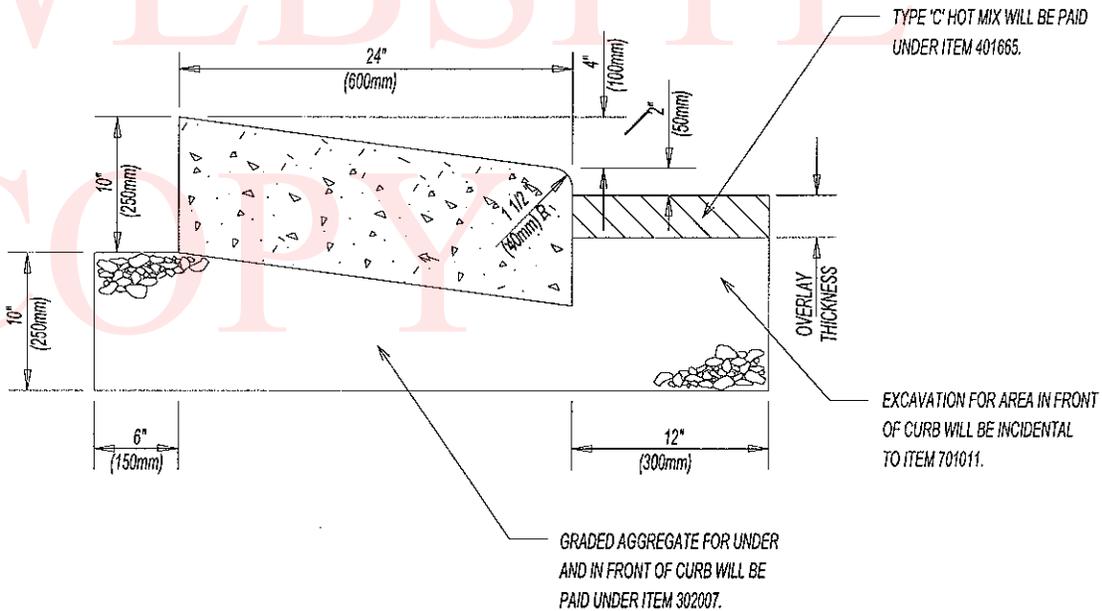

P.C.C. CURB TYPE 2

N.T.S.



DELAWARE DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102


PAGE 20 OF 33

NORTH MAINTENANCE VARIOUS LOCATIONS

DETAILS SHEET

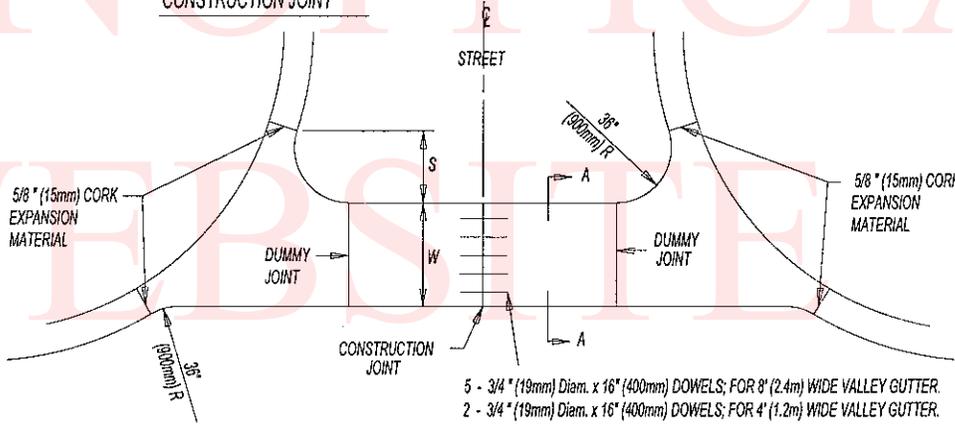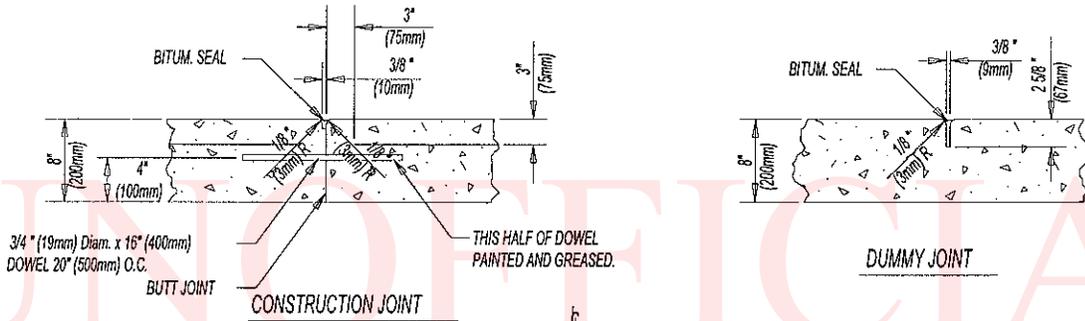

PLAN

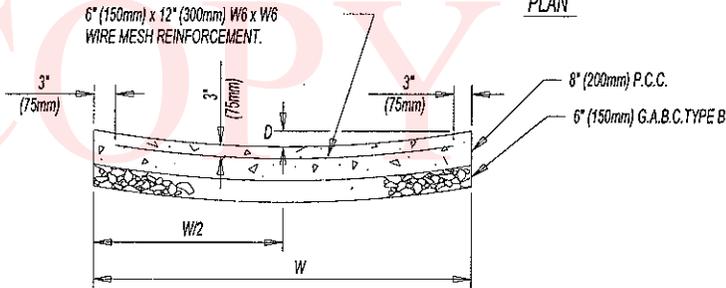

SECTION A-A

P.C.C. VALLEY GUTTER  
N.T.S.

WIDTH W	DEPTH D	OFFSET S
8' (2.4m)	3" (75mm)	16" (405mm)
4' (1.2m)	1 1/2" (38mm)	23 1/2" (585mm)

NOTE: EXCAVATION FOR AREA IN FRONT OF CURB WILL BE INCIDENTAL TO ITEM 701004.


DELAWARE DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102

PAGE 21 OF 33


NORTH MAINTENANCE VARIOUS LOCATIONS

DETAILS SHEET

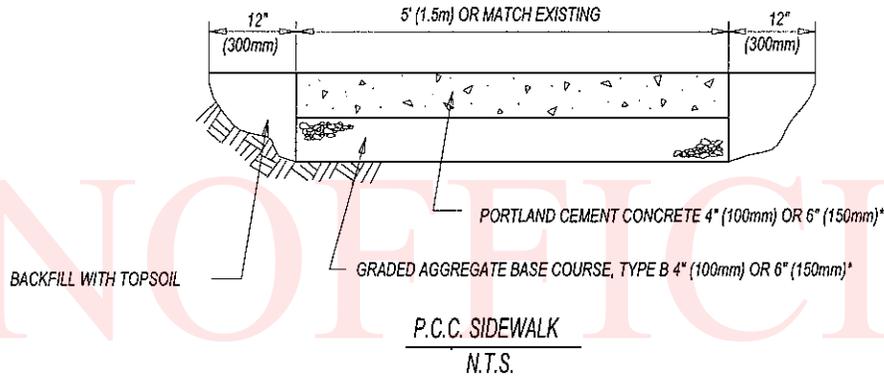

\* NOTE: 6" (150mm) CONCRETE OVER 6" (150mm) GRADED AGGREGATE TO BE USED FOR DRIVEWAY PLACEMENT

NOTE: ALL EDGES TO BE SAWCUT. CUTTING BY USE OF AIR HAMMERS MAY BE SUBSTITUTED FOR SAWCUTTING IF THE AREA IS TO BE OVERLAID UNDER THE SAME CONTRACT. THIS DETAIL SHALL BE USED FOR ALL HOT-MIX PATCHES UNLESS OTHERWISE SHOWN ON THE PLANS. IN AREAS WHERE NO HOT MIX OVERLAY IS PROPOSED, PLACE 2" (50mm) HOT MIX TYPE C PATCHING OVER 6" (150mm) BCBC HOT MIX PATCHING. FOR HOT MIX PATCHING, PARTIAL DEPTH, REMOVE EXISTING HOT MIX TO DEPTH OF EXISTING AGGREGATE BASE. REPLACE WITH HOT MIX TYPE C PATCHING.

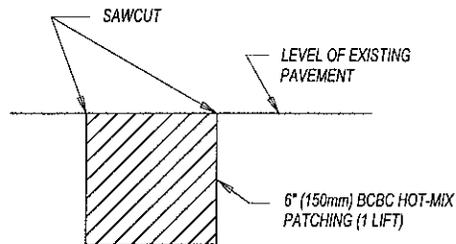

HOT-MIX PATCH DETAIL  
N.T.S.

DELAWARE DEPARTMENT OF TRANSPORTATION


CONTRACT NUMBER- T201203102

PAGE 22 OF 33

NORTH MAINTENANCE VARIOUS LOCATIONS

DETAILS SHEET

REMOVE AND DISPOSE OF EXISTING FRAME AND COVER AS DIRECTED BY OWNER IF NOT UTILIZED IN THE ADJUSTMENT. PLACE NEW OR EXISTING FRAME AND COVER (AS REQUIRED), TO CORRECT ELEVATION, RECOLLAR AND PLACE HOT MIX PATCH. NEW FRAME AND COVER (IF REQUIRED) TO BE PROVIDED BY OWNER.

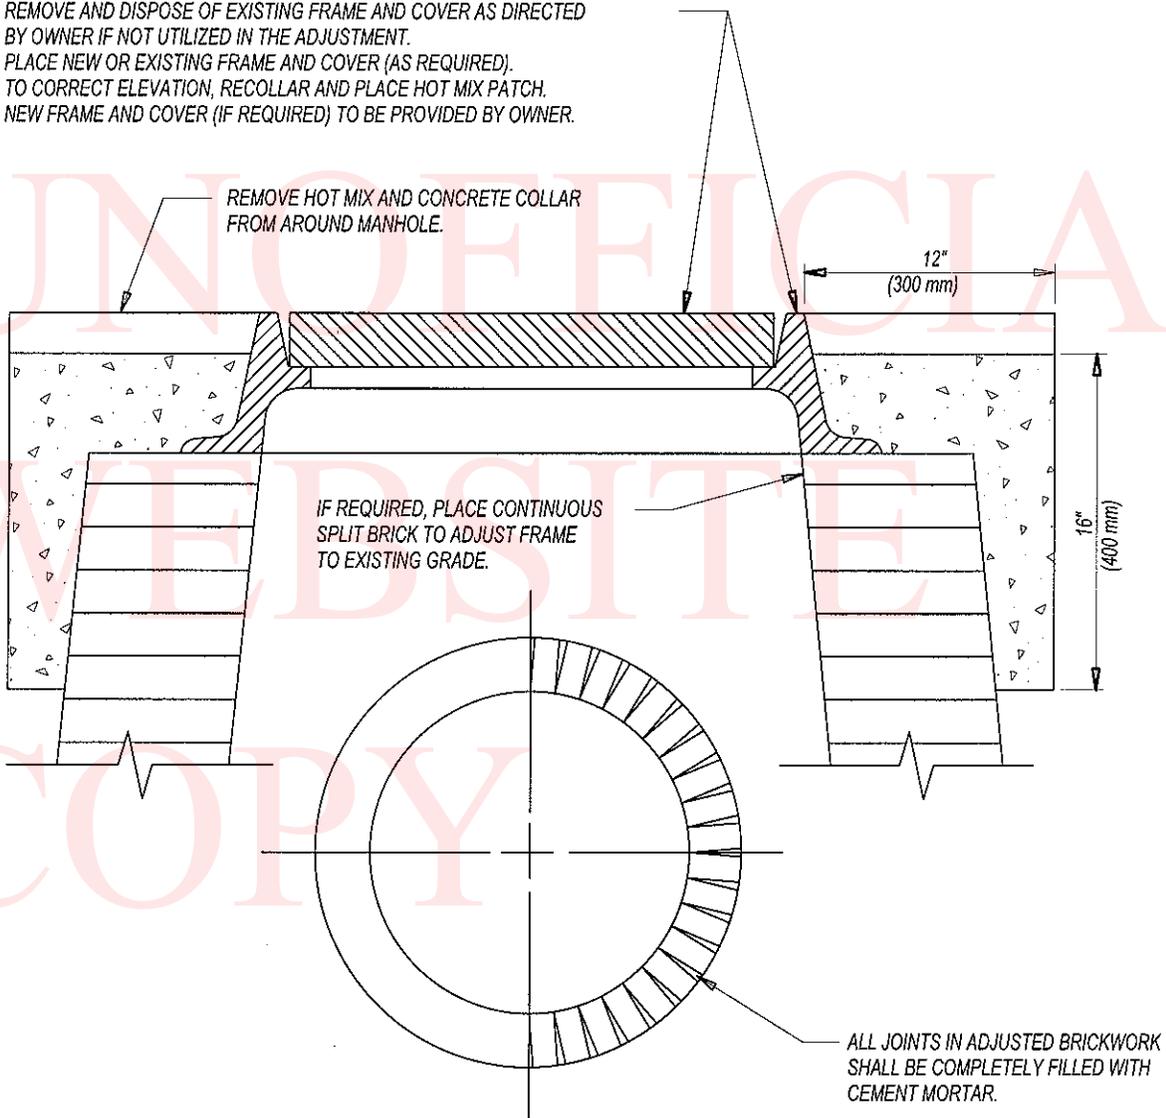

ADJUSTING AND REPAIRING MANHOLE

N.T.S.

NOTE: MANHOLES IN CONCRETE ROADWAYS SHALL BE SAWCUT FULL DEPTH TO THE SPECIFIED DIMENSION PRIOR TO ANY ADJUSTMENT BEING MADE. THE SAWCUTTING SHALL BE INCIDENTAL TO ITEM 710002.


DELAWARE DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102

PAGE 23 OF 33

NORTH MAINTENANCE VARIOUS LOCATIONS

DETAILS SHEET

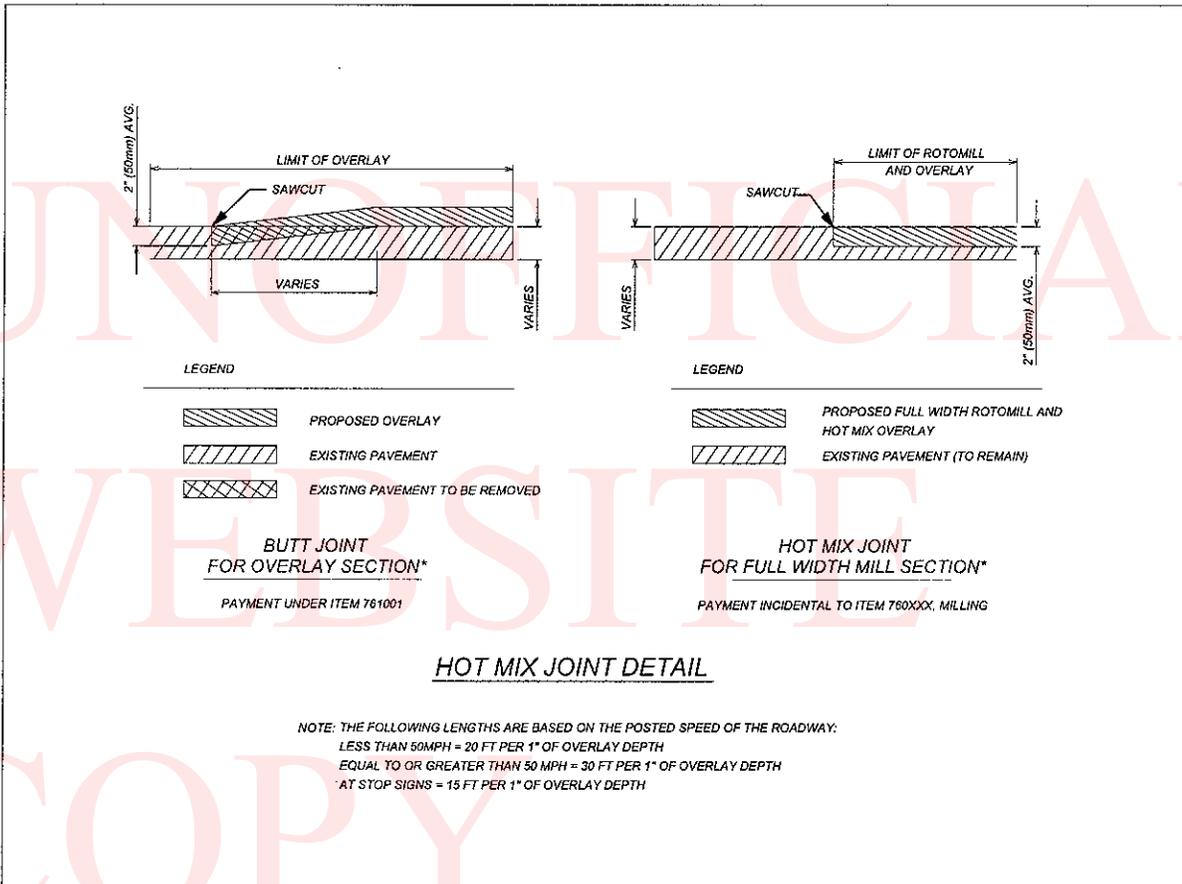

DELAWARE DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102


PAGE 24 OF 33

NORTH MAINTENANCE VARIOUS LOCATIONS


DETAILS SHEET

OPTION A

OPTION B

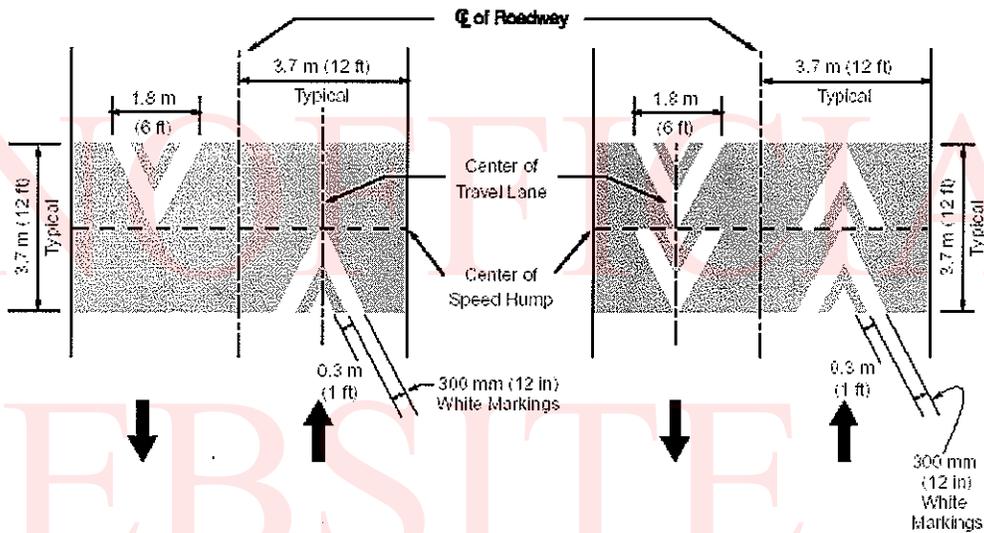

OPTION C

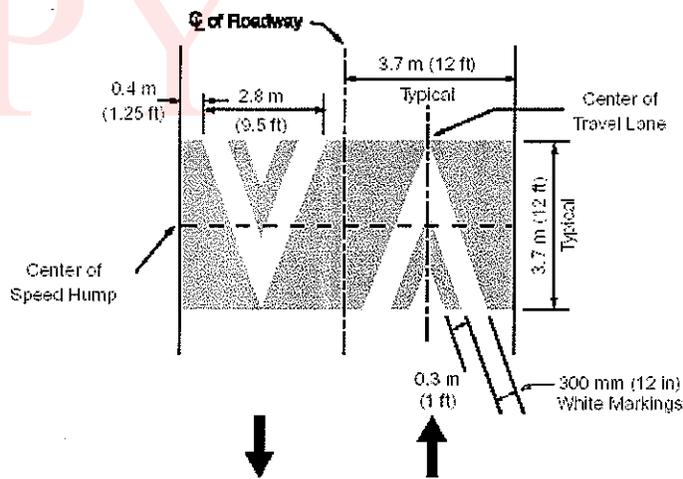

Legend

→ Direction of travel


DELAWARE DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102


PAGE 25 OF 33

NORTH MAINTENANCE VARIOUS LOCATIONS

DETAILS SHEET

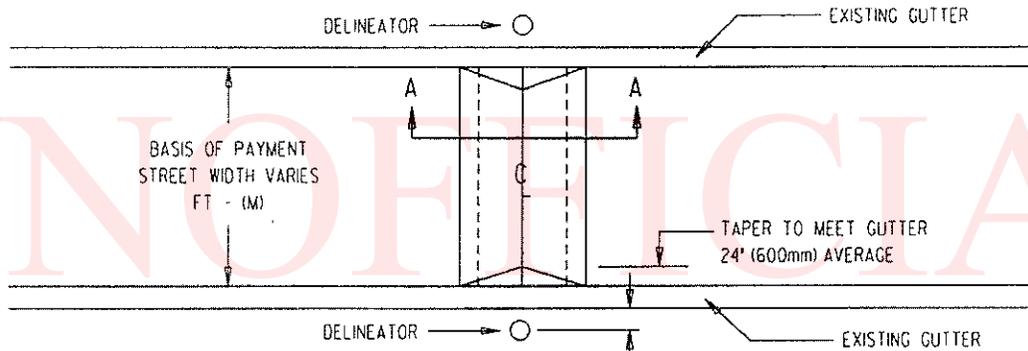

PLAN VIEW  
N.T.S.

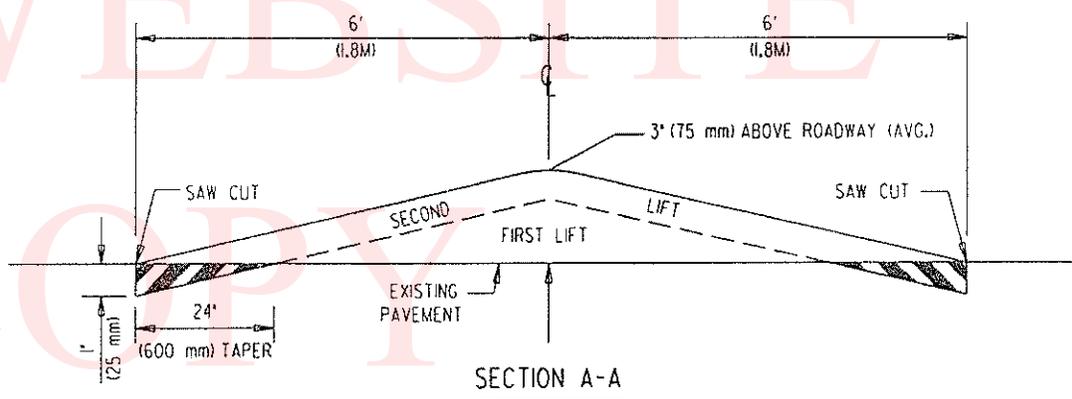

SECTION A-A  
N.T.S.

- NOTES:
1. SAW CUT EXISTING PAVEMENT AND REMOVE 1" (25mm) x 24" (600mm) WEDGE.
  2. PLACE FIRST LIFT AS SHOWN, 1/2" (38mm) TO 2" (50mm) AT  $\frac{1}{2}$ .
  3. PLACE SECOND LIFT 2" (50mm).
  4. TAPER SPEED HUMP APPROXIMATELY 2" (50mm) FROM FACE OF GUTTER EDGE. DO NOT BLOCK DRAINAGE.
  5. PAINTED STRIPING TO CONSIST OF:
    - a) TWO 4" (100mm) PARALLEL STRIPES PERPENDICULAR TO TRAFFIC FLOW.
    - b) ONE 4" (100mm) 'X' ACROSS THE ENTIRE SPEED HUMP.
    - c) HUMP SHALL BE TEMPORARILY OR PERMANENTLY STRIPED WITHIN 48 HOURS OF INSTALLATION.
  6. INSTALL 2 DELINEATORS

REMOVE AND CONSTRUCT SPEED HUMP (4015II)

N.T.S.

(ALL WORK TO BE INCIDENTAL TO PRICE BID FOR SECTION 4015II)

DELAWARE DEPARTMENT OF TRANSPORTATION


CONTRACT NUMBER- T201203102

PAGE 26 OF 33

NORTH MAINTENANCE VARIOUS LOCATIONS

DETAILS SHEET

\*SQUARE POST SHALL NOT BE LESS THAN 2" (50mm) X 2" (50mm)  
WITH A WALL THICKNESS OF 1/8" (2.774mm).

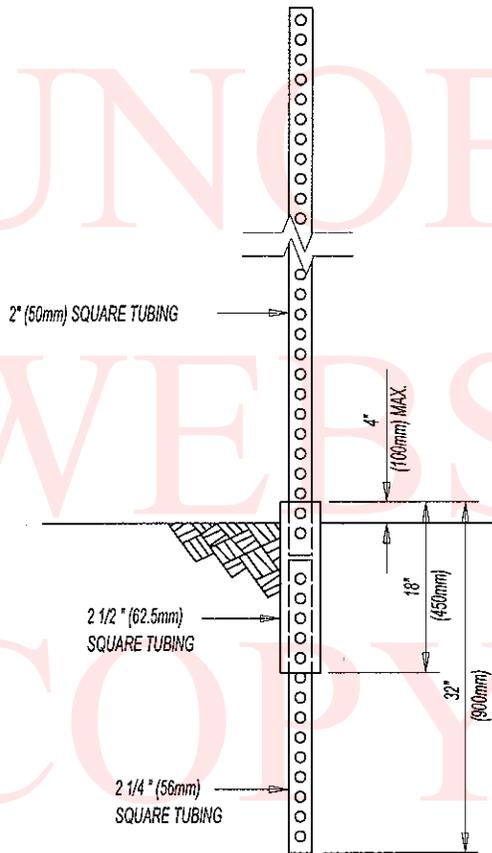

1. SQUARE TUBES ARE TO BE FORMED FROM GALVANIZED SHEET STRUCTURAL (PHYSICAL) QUALITY, ASTM A446, GRADE A, COATING DESIGNATION G90, REGULAR SPANGLE, OR HOT ROLLED CARBON SHEET STEEL STRUCTURAL (PHYSICAL) QUALITY, ASTM A570, GRADE 33.

A. NOMINAL OUTSIDE DIMENSIONS, IN. (mm):

2" (50) x (50) +/- .008 (.20)

2 1/4" (56) X 2 1/4" (56) +/- .01 (.25)

2 1/2" (62.5) X 2 1/2" (62.5) +/- .01 (.25)

B. ALL FOUR SIDES ARE TO HAVE EVENLY SPACED 7/16" (11mm) DIAMETER HOLES ON 1" (25mm) CENTERS THE ENTIRE LENGTH OF THE TUBE.

C. TOLERANCE ON THE HOLE IS +/- .016 IN. (.4mm). TOLERANCE ON THE HOLE SPACING IS +/- .12 IN. (3mm) IN 20 FT (6M).

D. STANDARD CORNER RADIUS SHALL BE .16 IN. (4mm) +/- .016 IN. (.4mm).

E. THE FASTENERS TO BE SUPPLIED UNDER THIS SPECIFICATION SHALL BE 5/16" (8mm) GRADE 5 UNC CORNER BOLTS WITH CADMIUM OR ZINC PLATING. INSTALLATION OF SIGNS SHALL BE WITH 3/8" (9.5mm) X 2 1/2" (63.5mm) BOLT WITH LOCKNUT AND WASHER.

BREAK-AWAY DELINEATOR POST ASSEMBLY

N.T.S.


DELAWARE DEPARTMENT OF TRANSPORTATION

CONTRACT NUMBER- T201203102

PAGE 27 OF 33


NORTH MAINTENANCE VARIOUS LOCATIONS

DETAILS SHEET

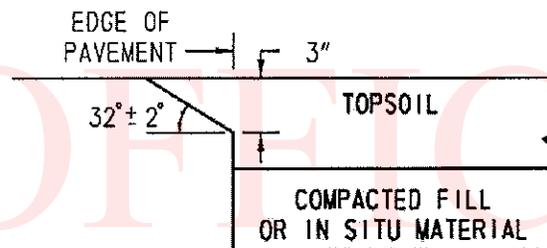

CONCRETE PAVEMENTS

N. T. S.

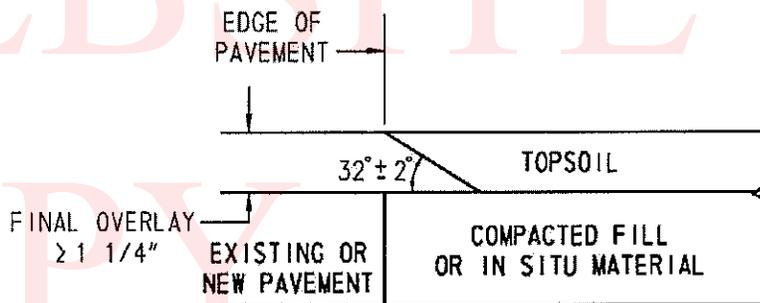

BITUMINOUS CONCRETE PAVEMENTS AND OVERLAYS

N. T. S.

SAFETY EDGE DETAIL

**DELAWARE DEPARTMENT OF TRANSPORTATION**

**CONTRACT T201203102**

**PAGE 28 OF 33**

**NORTH  
MAINTENANCE**

**COMMUNITY TRANSPORTATION FUND, NORTH II, 2012 OPEN END**

**LOCATION 1                    OPEN END ESTIMATE - OPEN END VARIOUS LOCATIONS FROM VARIOUS TO VARIOUS**

**LENGTH**

**GENERAL IMPROVEMENTS**  
**DEPENDENT ON LOCATION**

**COMMENTS:**

**MATERIAL ESTIMATE FOR LOCATION 1**

202000	EXCAVATION AND EMBANKMENT	60.00 C.Y.
302007	GRADED AGGREGATE BASE COURSE, TYPE B	300.00 C.Y.
302008	GRADED AGGREGATE BASE COURSE, TYPE B, PATCHING	150.00 C.Y.
401511	REMOVE AND CONSTRUCT SPEED HUMP	220.00 L.F.
401520	PAVING SURCHARGE, ZONE 1	1,000.00 TON
401521	PAVING SURCHARGE, ZONE 2	1,000.00 TON
401522	PAVING SURCHARGE, ZONE 3	1,000.00 TON
401524	PAVING SURCHARGE, ZONE 5	1,000.00 TON
401525	PAVING SURCHARGE, ZONE 6	1,000.00 TON
401526	PAVING SURCHARGE, ZONE 7	1,000.00 TON
401527	PAVING SURCHARGE, ZONE 8	1,000.00 TON
401528	PAVING SURCHARGE, ZONE 9	1,000.00 TON
401644	SUPERPAVE, TYPE C HOT-MIX, 115 GYRATIONS, PG 64-22 (CARBONATE STONE)	7,000.00 TON
401647	SUPERPAVE, TYPE B HOT-MIX, 115 GYRATIONS, PG 64-22	500.00 TON
401665	SUPERPAVE, TYPE C HOT-MIX, 160 GYRATIONS, PG 64-22, PATCHING	250.00 TON
401667	SUPERPAVE, BITUMINOUS CONCRETE BASECOURSE, 160 GYRATIONS, PG 64-22 PATCHING	250.00 TON
406001	HOT-MIX PATCHING	2,000.00 SY-IN
612020	REINFORCED CONCRETE PIPE, 12", CLASS IV	40.00 L.F.
612021	REINFORCED CONCRETE PIPE, 15", CLASS IV	40.00 L.F.
612022	REINFORCED CONCRETE PIPE, 18", CLASS IV	40.00 L.F.
612519	CORRUGATED POLYETHYLENE PIPE, TYPE C, 15"	100.00 L.F.
617002	REINFORCED CONCRETE FLARED END SECTION, 15"	1.00 EACH
701004	PORTLAND CEMENT CONCRETE VALLEY GUTTER, 8"	100.00 S.Y.
701010	PORTLAND CEMENT CONCRETE CURB, TYPE 1-8	250.00 L.F.
701011	PORTLAND CEMENT CONCRETE CURB, TYPE 2	30.00 L.F.
701020	IPCC CURB & GUTTER, TYPE 1-8	300.00 L.F.
701021	IPCC CURB & GUTTER, TYPE 2	4,400.00 L.F.
701022	IPCC CURB & GUTTER, TYPE 3-8	200.00 L.F.

DELAWARE DEPARTMENT OF TRANSPORTATION

CONTRACT T201203102

PAGE 29 OF 33

NORTH  
MAINTENANCE

COMMUNITY TRANSPORTATION FUND, NORTH II, 2012 OPEN END

LOCATION 1                    OPEN END ESTIMATE - OPEN END VARIOUS LOCATIONS FROM VARIOUS TO VARIOUS

LENGTH

GENERAL IMPROVEMENTS

DEPENDENT ON LOCATION

COMMENTS:

MATERIAL ESTIMATE FOR LOCATION 1

705001	P.C.C. SIDEWALK, 4"	1,300.00 S.F.
705002	P.C.C. SIDEWALK, 6"	2,100.00 S.F.
705007	SIDEWALK SURFACE DETECTABLE WARNING SYSTEM	500.00 S.F.
705008	CURB RAMP, TYPE 1	390.00 S.F.
705009	CURB RAMP, TYPE 2, 3, AND/OR 4	6,000.00 S.F.
708050	DRAINAGE INLET, 34" X 18"	5.00 EACH
708051	DRAINAGE INLET, 34" X 24"	3.00 EACH
708060	REPLACE DRAINAGE INLET GRATE(S)	20.00 EACH
708061	REPLACE DRAINAGE INLET FRAME(S)	10.00 EACH
708585	JUNCTION BOX, 48" X 30"	1.00 EACH
710001	ADJUSTING AND REPAIRING EXISTING DRAINAGE INLET	30.00 EACH
710002	ADJUSTING AND REPAIRING EXISTING MANHOLE	75.00 EACH
712005	RIPRAP, R-4	10.00 S.Y.
713003	GEOTEXTILES, RIPRAP	10.00 S.Y.
714003	DITCHING	200.00 L.F.
715001	PERFORATED PIPE UNDERDRAINS, 6"	300.00 L.F.
718000	ROOF DRAINS	70.00 L.F.
727502	ADJUSTING EXISTING MONUMENT BOX	3.00 EACH
732004	TOPSOIL (TON)	300.00 TON
734016	PERMANENT GRASS SEEDING, SUBDIVISION	1,000.00 S.Y.
735534	SOIL RETENTION BLANKET MULCH, TYPE 4	200.00 S.Y.
743003	ARROWPANELS, TYPE C	5.00 EA-DY
743009	FURNISH AND MAINTAIN TRUCK MOUNTED ATTENUATOR, TYPE I	5.00 EA-DY
743050	** FLAGGER, NEW CASTLE COUNTY, STATE	1,800.00 HOUR
743062	** FLAGGER, NEW CASTLE COUNTY, STATE, OVERTIME	250.00 HOUR
746774	SUPPLY AND INSTALLATION OF LOOP DETECTOR WIRE	200.00 L.F.
748015	PERMANENT PAVEMENT STRIPING, SYMBOL/LEGEND ALKYD-THERMOPLAST IC	225.00 S.F.
748019	TEMPORARY MARKINGS, PAINT, 4"	1,400.00 L.F.

DELAWARE DEPARTMENT OF TRANSPORTATION

CONTRACT T201203102

PAGE 30 OF 33

NORTH  
MAINTENANCE

COMMUNITY TRANSPORTATION FUND, NORTH II, 2012 OPEN END

**LOCATION 1**                      **OPEN END ESTIMATE - OPEN END VARIOUS LOCATIONS FROM VARIOUS TO VARIOUS**

LENGTH

**GENERAL IMPROVEMENTS**  
DEPENDENT ON LOCATION

COMMENTS:

**MATERIAL ESTIMATE FOR LOCATION 1**

748506	PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, 4"	1,400.00 L.F.
750000	ADJUST WATER VALVE BOXES	5.00 EACH
758000	REMOVAL OF EXISTING PORTLAND CEMENT CONCRETE PAVEMENT, CURB, SIDEWALK, ETC.	2,000.00 S.Y.
760000	PAVEMENT - MILLING, HOT-MIX	15,000.00 SY-IN
760006	PAVEMENT - MILLING, HOT-MIX, 2" DEPTH	70,000.00 S.Y.
760502	PAVEMENT MILLING, TAPER CUT	600.00 SY-IN
761001	BUTT JOINTS, HOT MIX	500.00 S.Y.
762001	SAW CUTTING, HOT MIX	7,000.00 L.F.
762002	SAW CUTTING, CONCRETE, FULL DEPTH	1,000.00 L.F.
763544	ROAD LOCATION MOBILIZATION, ZONE 1	5.00 EACH
763545	ROAD LOCATION MOBILIZATION, ZONE 2	5.00 EACH
763546	ROAD LOCATION MOBILIZATION, ZONE 3	5.00 EACH
763547	ROAD LOCATION MOBILIZATION, ZONE 4	5.00 EACH
763548	ROAD LOCATION MOBILIZATION, ZONE 5	5.00 EACH
763549	ROAD LOCATION MOBILIZATION, ZONE 6	5.00 EACH
763550	ROAD LOCATION MOBILIZATION, ZONE 7	5.00 EACH
763551	ROAD LOCATION MOBILIZATION, ZONE 8	5.00 EACH
763552	ROAD LOCATION MOBILIZATION, ZONE 9	5.00 EACH

\*\* DENOTES FIXED PRICE ITEM

---

DELAWARE DEPARTMENT OF TRANSPORTATION

CONTRACT: T201203102

PAGE 31 OF 33

NORTH COMMUNITY TRANSPORTATION FUND, NORTH II, 2012 OPEN END  
MAINTENANCE

---

CONTRACT QUANTITIES SUMMARY SHEET

202000	EXCAVATION AND EMBANKMENT	60.00 C.Y.
302007	GRADED AGGREGATE BASE COURSE, TYPE B	300.00 C.Y.
302008	GRADED AGGREGATE BASE COURSE, TYPE B, PATCHING	150.00 C.Y.
401511	REMOVE AND CONSTRUCT SPEED HUMP	220.00 L.F.
401520	PAVING SURCHARGE, ZONE 1	1,000.00 TON
401521	PAVING SURCHARGE, ZONE 2	1,000.00 TON
401522	PAVING SURCHARGE, ZONE 3	1,000.00 TON
401524	PAVING SURCHARGE, ZONE 5	1,000.00 TON
401525	PAVING SURCHARGE, ZONE 6	1,000.00 TON
401526	PAVING SURCHARGE, ZONE 7	1,000.00 TON
401527	PAVING SURCHARGE, ZONE 8	1,000.00 TON
401528	PAVING SURCHARGE, ZONE 9	1,000.00 TON
401644	SUPERPAVE, TYPE C HOT-MIX, 115 GYRATIONS, PG 64-22 (CARBONATE STONE)	7,000.00 TON
401647	SUPERPAVE, TYPE B HOT-MIX, 115 GYRATIONS, PG 64-22	500.00 TON
401665	SUPERPAVE, TYPE C HOT-MIX, 160 GYRATIONS, PG 64-22, PATCHING	250.00 TON
401667	SUPERPAVE, BITUMINOUS CONCRETE BASECOURSE, 160 GYRATIONS, PG 64-22 PATCHING	250.00 TON
406001	HOT-MIX PATCHING	2,000.00 SY-IN
612020	REINFORCED CONCRETE PIPE, 12", CLASS IV	40.00 L.F.
612021	REINFORCED CONCRETE PIPE, 15", CLASS IV	40.00 L.F.
612022	REINFORCED CONCRETE PIPE, 18", CLASS IV	40.00 L.F.
612519	CORRUGATED POLYETHYLENE PIPE, TYPE C, 15"	100.00 L.F.
617002	REINFORCED CONCRETE FLARED END SECTION, 15"	1.00 EACH
701004	PORTLAND CEMENT CONCRETE VALLEY GUTTER, 8"	100.00 S.Y.
701010	PORTLAND CEMENT CONCRETE CURB, TYPE 1-8	250.00 L.F.
701011	PORTLAND CEMENT CONCRETE CURB, TYPE 2	30.00 L.F.
701020	IPCC CURB & GUTTER, TYPE 1-8	300.00 L.F.
701021	IPCC CURB & GUTTER, TYPE 2	4,400.00 L.F.
701022	IPCC CURB & GUTTER, TYPE 3-8	200.00 L.F.

---

DELAWARE DEPARTMENT OF TRANSPORTATION

CONTRACT: T201203102

PAGE 32 OF 33

NORTH  
MAINTENANCE

COMMUNITY TRANSPORTATION FUND, NORTH II, 2012 OPEN END

---

CONTRACT QUANTITIES SUMMARY SHEET

705001	P.C.C. SIDEWALK, 4"	1,300.00 S.F.
705002	P.C.C. SIDEWALK, 6"	2,100.00 S.F.
705007	SIDEWALK SURFACE DETECTABLE WARNING SYSTEM	500.00 S.F.
705008	CURB RAMP, TYPE 1	390.00 S.F.
705009	CURB RAMP, TYPE 2, 3, AND/OR 4	6,000.00 S.F.
708050	DRAINAGE INLET, 34" X 18"	5.00 EACH
708051	DRAINAGE INLET, 34" X 24"	3.00 EACH
708060	REPLACE DRAINAGE INLET GRATE(S)	20.00 EACH
708061	REPLACE DRAINAGE INLET FRAME(S)	10.00 EACH
708585	JUNCTION BOX, 48" X 30"	1.00 EACH
710001	ADJUSTING AND REPAIRING EXISTING DRAINAGE INLET	30.00 EACH
710002	ADJUSTING AND REPAIRING EXISTING MANHOLE	75.00 EACH
712005	RIPRAP, R-4	10.00 S.Y.
713003	GEOTEXTILES, RIPRAP	10.00 S.Y.
714003	DITCHING	200.00 L.F.
715001	PERFORATED PIPE UNDERDRAINS, 6"	300.00 L.F.
718000	ROOF DRAINS	70.00 L.F.
727502	ADJUSTING EXISTING MONUMENT BOX	3.00 EACH
732004	TOPSOIL (TON)	300.00 TON
734016	PERMANENT GRASS SEEDING, SUBDIVISION	1,000.00 S.Y.
735534	SOIL RETENTION BLANKET MULCH, TYPE 4	200.00 S.Y.
743003	ARROWPANELS, TYPE C	5.00 EA-DY
743009	FURNISH AND MAINTAIN TRUCK MOUNTED ATTENUATOR, TYPE I	5.00 EA-DY
743050	** FLAGGER, NEW CASTLE COUNTY, STATE	1,800.00 HOUR
743062	** FLAGGER, NEW CASTLE COUNTY, STATE, OVERTIME	250.00 HOUR
746774	SUPPLY AND INSTALLATION OF LOOP DETECTOR WIRE	200.00 L.F.
748015	PERMANENT PAVEMENT STRIPING, SYMBOL/LEGEND ALKYD-THERMOPLAST IC	225.00 S.F.
748019	TEMPORARY MARKINGS, PAINT, 4"	1,400.00 L.F.

---

DELAWARE DEPARTMENT OF TRANSPORTATION

CONTRACT: T201203102

PAGE 33 OF 33

NORTH  
MAINTENANCE

COMMUNITY TRANSPORTATION FUND, NORTH II, 2012 OPEN END

---

CONTRACT QUANTITIES SUMMARY SHEET

748506	PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, 4"	1,400.00 L.F.
750000	ADJUST WATER VALVE BOXES	5.00 EACH
758000	REMOVAL OF EXISTING PORTLAND CEMENT CONCRETE PAVEMENT, CURB, SIDEWALK, ETC.	2,000.00 S.Y.
760000	PAVEMENT - MILLING, HOT-MIX	15,000.00 SY-IN
760006	PAVEMENT - MILLING, HOT-MIX, 2" DEPTH	70,000.00 S.Y.
760502	PAVEMENT MILLING, TAPER CUT	600.00 SY-IN
761001	BUTT JOINTS, HOT MIX	500.00 S.Y.
762001	SAW CUTTING, HOT MIX	7,000.00 L.F.
762002	SAW CUTTING, CONCRETE, FULL DEPTH	1,000.00 L.F.
763000	INITIAL EXPENSE	LUMP SUM
763544	ROAD LOCATION MOBILIZATION, ZONE 1	5.00 EACH
763545	ROAD LOCATION MOBILIZATION, ZONE 2	5.00 EACH
763546	ROAD LOCATION MOBILIZATION, ZONE 3	5.00 EACH
763547	ROAD LOCATION MOBILIZATION, ZONE 4	5.00 EACH
763548	ROAD LOCATION MOBILIZATION, ZONE 5	5.00 EACH
763549	ROAD LOCATION MOBILIZATION, ZONE 6	5.00 EACH
763550	ROAD LOCATION MOBILIZATION, ZONE 7	5.00 EACH
763551	ROAD LOCATION MOBILIZATION, ZONE 8	5.00 EACH
763552	ROAD LOCATION MOBILIZATION, ZONE 9	5.00 EACH
763643	MAINTENANCE OF TRAFFIC, ALL INCLUSIVE	LUMP SUM

\*\* DENOTES FIXED PRICE ITEM