

STATE OF DELAWARE



This Copy is for information only.
You must request a CD from
DelDOT in order to bid.

DEPARTMENT OF TRANSPORTATION

BID PROPOSAL

for

CONTRACT T201806501.01

Patching and Thin Overlay Open-End, Central, FY18-20

Kent County

ADVERTISEMENT DATE: August 6, 2018

COMPLETION TIME: 365 Calendar Days

SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION
DELAWARE DEPARTMENT OF TRANSPORTATION
AUGUST 2016

Bids will be received in the Bidder's Room at the Delaware Department of Transportation's Administration Building, 800 Bay Road, Dover, Delaware prior to 2:00 P.M. local time September 11, 2018

Contract No.T201806501.01

Patching and Thin Overlay Open-End, Central, FY18-20
Kent County

GENERAL DESCRIPTION

LOCATION

These improvements are located in Kent County more specifically shown on the Location Map(s) of the enclosed Plans.

DESCRIPTION

The improvements consist of furnishing all labor and materials for this contract. This project involves patching and thin overlay and other incidental construction in accordance with the location, notes and details shown on the plans and as directed by the Engineer.

COMPLETION TIME

All work on this contract must be complete within 365 Calendar Days. It is the Department's intent to issue a Notice to Proceed such that work starts on or about November 10, 2018.

PROSPECTIVE BIDDERS NOTES:

1. BIDDERS MUST BE REGISTERED with DelDOT and request a cd of the official plans and specifications in order to submit a bid. Contact DelDOT at dot-ask@state.de.us, or (302) 760-2031. Bids will be received in the Bidder's Room at the Delaware Department of Transportation's Administration Building, 800 Bay Road, Dover, Delaware prior to 2:00 P.M. local time September 11, 2018 unless changed via addendum.
2. QUESTIONS regarding this project are to be e-mailed to dot-ask@state.de.us no less than six business days prior to the bid opening date in order to receive a response. Please include T201806501.01 in the subject line. Responses to inquiries are posted on-line at <http://www.bids.delaware.gov>.
3. THE BID PROPOSAL incorporates a cd containing **Expedite, version 5.9a** and its installation file. Bidders are to use the cd provided to enter their bid amounts into the Expedite file. The Expedite bid file must be printed and submitted in paper form along with the cd and other required documents prior to the Bid due date and time.
4. SURETY BOND - Each proposal must be accompanied by a deposit of either surety bond or security for a sum equal to at least 10% of the bid.
5. DRUG TESTING - Regulation 4104; The state Office of Management and Budget has developed regulations that require Contractors and Subcontractors to implement a program of mandatory drug testing for Employees who work on Large Public Works Contracts funded all or in part with public funds pursuant to 29 Del.C. §6908(a)(6). **Refer to the full requirements by following the below link:** <http://regulations.delaware.gov/register/september2015/final/19%20DE%20Reg%20207%2009-01-15.htm> **Regulation was revised for projects advertised beginning 01/01/18.** Please review the revised regulation for details. Note a few of the requirements;
 - * At bid submission - Each Contractor must submit with the bid *a single signed affidavit certifying that the Contractor and Subcontractor(s) has in place or will implement during the entire term of the contract a Mandatory Drug Testing Program that complies with the regulation;*
 - * At least Two business days prior to contract execution - The awarded Contractor shall provide to DelDOT copies of the Employee Drug Testing Program for the Contractor, and any other listed Subcontractors;
 - * ~~Testing Report Forms shall be submitted to DelDOT monthly. No longer required.~~
 - * Subcontractors - Contractors that employ Subcontractors on the job site may do so only after submitting a copy of the Subcontractor's Employee Drug Testing Program along with the standard required subcontractor information. A Subcontractor shall not commence work until DelDOT has approved the subcontractor in writing;
 - * Penalties for non-compliance are specified in the regulation.
6. NO RETAINAGE will be withheld on this contract.
7. EXTERNAL COMPLAINT PROCEDURE can be viewed on DelDOT's Website [here](#), or you may request a copy by calling (302) 760-2555.

8. REMINDER; A copy of your firm's Delaware Business License must be submitted with your bid.
9. AUGUST 2016 STANDARD SPECIFICATIONS apply to this contract. The Contractor shall make himself aware of any revisions and corrections (Supplemental Specifications, if any) and apply them to the applicable item(s) of this contract. The 2016 Standard Specifications can be [viewed here](#).
- 9a. FLATWORK CONCRETE TECHNICIAN CERTIFICATION TRAINING:
Section 501.03, 503.03, 505.03, 610.03, 701.03 and 702.03 of the 2016 Standard Specifications require contractor's to provide an American Concrete Institute (ACI) or National Ready Mix Concrete Association (NRMCA) certified concrete flatwork technician to supervise all finishing of flatwork concrete. Concrete flatwork certification will be effective starting on June 1, 2018.
10. **BREAKOUT SHEETS** MUST be submitted either with your bid documents; or within seven (7) calendar days following the bid due date by the lowest apparent bidder. Refer to instructions adjacent to the Breakout Sheets in this document.
11. No utility relocation involvement is anticipated. Should any conflicts be encountered during construction requiring adjustment and/or relocation of the agencies' existing facilities, the necessary relocation work shall be accomplished by the respective agencies' forces, as directed by the District Engineer. Any adjustments and/or relocations of municipally owned facilities shall be done by the State's contractor in accordance with the respective agencies' standard specifications as directed by the District Engineer.
12. No environmental permits are required for this work provided no jurisdictional wetlands or waters are impacted. If there is any question as to whether or not a water or wetland is jurisdictional, contact the DelDOT Environmental Section at 302-760-2264.
13. It is anticipated that all work will occur within DelDOT's existing right of way or easement areas. Should the need occur to trespass onto private property; it will be the responsibility of the Project manager to secure such trespass needs.
14. It is anticipated that all work will occur within DelDOT's right of way. Should the need occur to trespass onto railroad property, including the highway-rail crossing; it will be the responsibility of the Project Manager to contact the railroad Chief Engineer and obtain written authorization before entering.
15. The project manager shall be responsible for coordinating with the Traffic Section relating to any impacts to Traffic Section facilities (including but not limited to traffic loops, junction wells etc.) at least 4 weeks in advance of the start of the activity. Prior to initiating any work on this contract (or sites), the Project Manager shall be responsible for preparing and submitting for approval of the Safety Section, a Maintenance of Traffic Plan. Sufficient time shall be provided for the review and approval of the plan. The Maintenance of Traffic Plan shall include proposed time restrictions on the closure of travel lanes subject to the approval of the Safety Section.
16. The Project Manager is responsible for ensuring any required documents and analysis as part of the adopted Work Zone Safety and Mobility Procedures and Guidelines has been completed prior to any work starting on this contract.

**STATE OF DELAWARE
CONSTRUCTION ITEMS UNITS OF MEASURE**

English Code	English Description	Multiply By	Metric Code	Metric Description	Suggested CEC Metric Code
ACRE	Acre	0.4047	ha	Hectare	HECTARE
BAG	Bag	N/A	Bag	Bag	BAG
C.F.	Cubic Foot	0.02832	m ³	Cubic Meter	M3
C.Y.	Cubic Yard	0.7646	m ³	Cubic Meter	M3
EA-DY	Each Day	N/A	EA-DY	Each Day	EA-DY
EA-MO	Each Month	N/A	EA-MO	Each Month	EA-MO
EA/NT	Each Night	N/A	EA-NT	Each Night	EA/NT
EACH	Each	N/A	EA	Each	EACH
GAL	Gallon	3.785	L	Liter	L
HOUR	Hour	N/A	h	Hour	HOUR
INCH	Inch	25.4	mm	Millimeter	MM
L.F.	Linear Foot	0.3048	m	Linear Meter	L.M.
L.S.	Lump Sum	N/A	L.S.	Lump Sum	L.S.
LA-MI	Lane Mile	1.609	LA-km	Lane-Kilometer	LA-KM
LB	Pound	0.4536	kg	Kilogram	KG
MFBM	Thousand Feet of Board Measure	2.3597	m ³	Cubic Meter	M3
MGAL	Thousand Gallons	3.785	kL	Kiloliter	KL
MILE	Mile	1.609	km	Kilometer	KM
S.F.	Square Foot	0.0929	m ²	Square Meter	M2
S.Y.	Square Yard	0.8361	m ²	Square Meter	M2
SY-IN	Square Yard-Inch	0.8495	m ² -25 mm	Square Meter-25 Millimeter	M2-25 MM
TON	Ton	.9072	t	Metric Ton (1000kg)	TON
N.A.*	Kip	4.448	kN	Kilonewton	N.A.*
N.A.*	Thousand Pounds per Square Inch	6.895	MPa	Megapascal	N.A.*

*Not used for units of measurement for payment.

TABLE OF CONTENTS

GENERAL DESCRIPTION..... i
LOCATION..... i
DESCRIPTION..... i
COMPLETION TIME..... i
PROSPECTIVE BIDDERS NOTES..... i
CONSTRUCTION ITEMS UNITS OF MEASURE..... iii

GENERAL NOTICES..... 1
SPECIFICATIONS..... 1
CLARIFICATIONS..... 1
ATTESTING TO NON-COLLUSION..... 1
QUANTITIES..... 1
PREFERENCE FOR DELAWARE LABOR..... 1
EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS..... 1
TAX CLEARANCE..... 2
LICENSE..... 2
DIFFERING SITE CONDITIONS..... 2
RIGHT TO AUDIT..... 3

PREVAILING WAGES..... 3
STATE WAGE RATES..... 5

SPECIAL PROVISIONS..... 6
401502 - ASPHALT CEMENT COST ADJUSTMENT..... 7
401517 - STONE MATRIX ASPHALT (SMA) WEARING SURFACE..... 11
401699 - QUALITY CONTROL/QUALITY ASSURANCE OF BITUMINOUS CONCRETE..... 16
503503 - PATCHING CONCRETE..... 29
801500 - MAINTENANCE OF TRAFFIC - ALL INCLUSIVE..... 30

BID PROPOSAL FORMS..... 35
BREAKOUT SHEET..... 42

DRUG TESTING AFFIDAVIT..... 45

CERTIFICATION..... 46

BID BOND..... 48

GENERAL NOTICES

SPECIFICATIONS:

The specifications entitled "Standard Specifications for Road and Bridge Construction, August, 2016", hereinafter referred to as the Standard Specifications, and Supplemental Specifications, the Special Provisions, notes on the Plans, this Bid Proposal, and any addenda thereto shall govern the work to be performed under this contract. The Specifications and any Supplemental Specifications can be [viewed here](#).

CLARIFICATIONS:

Under any Section or Item included in the Contract, the Contractor shall be aware that when requirements, responsibilities, and furnishing of materials are outlined in the details and notes on the Plans and in the paragraphs preceding the "Basis of Payment" paragraph in the Standard Specifications or Special Provisions, no interpretation shall be made that such stipulations are excluded because reiteration is not made in the "Basis of Payment" paragraph.

ATTESTING TO NON-COLLUSION:

The Department requires as a condition precedent to acceptance of bids a sworn statement executed by, or on behalf of, the person, firm, association, or corporation to whom such contract is to be awarded, certifying that such person, firm, association, or corporation has not, either directly or indirectly, entered into any agreement, participated in any collusion, or otherwise taken any action in restraint of free competitive bidding in connection with such contract. The form for this sworn statement is included in the proposal and must be properly executed in order to have the bid considered.

QUANTITIES:

The quantities shown are for comparison of bids only. The Department may increase or decrease any quantity or quantities without penalty or change in the bid price.

PREFERENCE FOR DELAWARE LABOR:

Delaware Code, Title 29, Chapter 69, Section 6962, Paragraph (d), Subsection (4)b:

"In the construction of all public works for the State or any political subdivision thereof, or by firms contracting with the State or any political subdivision thereof, preference in employment of laborers, workmen or mechanics shall be given to bona fide legal citizens of the State who have established citizenship by residence of at least 90 days in the State. Each public works contract for the construction of public works for the State or any political subdivision thereof shall contain a stipulation that any person, company or corporation who violates this section shall pay a penalty to the Secretary of Finance equal to the amount of compensation paid to any person in violation of this section."

EQUALITY OF EMPLOYMENT OPPORTUNITY ON PUBLIC WORKS:

Delaware Code, Title 29, Chapter 69, Section 6962, Paragraph (d), Subsection (7) states;

- a. As a condition of the awarding of any contract for public works financed in whole or in part by State appropriation, such contracts shall include the following provisions:

During the performance of this contract, the contractor agrees as follows:

1. The contractor will not discriminate against any employee or applicant for employment because of race, creed, color, sex, sexual orientation, gender identity or national origin. The contractor will take positive steps to ensure that applicants are employed and that employees are treated during employment without regard to their race, creed, color, sex, sexual orientation, gender identity or national origin. Such action shall include, but not be limited to, the following: employment, upgrading, demotion or transfer; recruitment or recruitment advertising; layoff or termination; rates of pay or other forms of compensation; and selection for training, including apprenticeship.

The contractor agrees to post in conspicuous places available to employees and applicants for employment notices to be provided by the contracting agency setting forth this nondiscrimination clause.

2. The contractor will, in all solicitations or advertisements for employees placed by or on behalf of the contractor, state that all qualified applicants will receive consideration for employment without regard to race, creed, color, sex, sexual orientation, gender identity or national origin.
3. The contractor will ensure employees receive equal pay for equal work, without regard to sex. Employee pay differential is acceptable if pursuant to a seniority system, a merit system, a system which measures earnings by quantity or quality of production, or if the differential is based on any other factor other than sex.

TAX CLEARANCE:

As payments to each vendor or contractor aggregate \$2,000, the Division of Accounting will report such vendor or contractor to the Division of Revenue, who will then check the vendor or contractor's compliance with tax requirements and take such further action as may be necessary to insure compliance.

LICENSE:

A person desiring to engage in business in this State as a contractor shall obtain a license upon making application to the Division of Revenue.

CONTRACTOR / SUBCONTRACTOR LICENSE: 29 DEL. C. §6967:

(b) No agency shall accept a proposal for a public works contract unless such contractor has provided a proper and current copy of its occupational and/or business license, as required by Title 30, to such agency.

(c) Any contractor that enters a public works contract must provide to the agency to which it is contracting, within 30 days of entering such public works contract, copies of all occupational and business licenses of subcontractors and/or independent contractors that will perform work for such public works contract. However, if a subcontractor or independent contractor is hired or contracted more than 20 days after the contractor entered the public works contract the occupational or business license of such subcontractor or independent contractor shall be provided to the agency within 10 days of being contracted or hired.

DIFFERING SITE CONDITIONS,

SUSPENSIONS OF WORK and SIGNIFICANT CHANGES IN THE CHARACTER OF WORK:

Differing site conditions: During the progress of the work, if subsurface or latent physical conditions are encountered at the site differing materially from those indicated in the contract or if unknown physical conditions of an unusual nature, differing materially from those ordinarily encountered and generally recognized as inherent in the work provided for in the contract are encountered at the site, the party discovering such conditions shall promptly notify the other party in writing of the specific differing conditions before they are disturbed and before the affected work is performed.

Upon written notification, the engineer will investigate the conditions, and if he/she determines that the conditions materially differ and cause an increase or decrease in the cost or time required for the performance of any work under the contract, an adjustment, excluding loss of anticipated profits, will be made and the contract modified in writing accordingly. The engineer will notify the contractor of his/her determination whether or not an adjustment of the contract is warranted.

No contract adjustment which results in a benefit to the contractor will be allowed unless the contractor has provided the required written notice.

No contract adjustment will be allowed under their clause for any effects caused on unchanged work.

Suspensions of work ordered by the engineer: If the performance of all or any portion of the work is suspended or delayed by the engineer in writing for an unreasonable period of time (not originally anticipated, customary or inherent to the construction industry) and the contractor believes that additional compensation and/or contract time is due as a result of such suspension or delay, the contractor shall submit to the engineer in writing a request for adjustment within 7 calendar days of receipt of the notice to resume work. The request shall set forth the reasons and support for such adjustment.

Upon receipt, the engineer will evaluate the contractor's request. If the engineer agrees that the cost and/or time required for the performance of the contract has increased as a result of such suspension and the suspension was caused by conditions beyond the control of and not the fault of the contractor, its suppliers, or subcontractors at any approved tier, and not caused by weather, the engineer will make an adjustment

(excluding profit) and modify the contract in writing accordingly. The engineer will notify the contractor of his/her determination whether or not an adjustment of the contract is warranted.

No contract adjustment will be allowed unless the contractor has submitted the request for adjustment within the time prescribed.

No contract adjustment will be allowed under this clause to the extent that performance would have been suspended or delayed by any other cause, or for which an adjustment is provided for or excluded under any other term or condition of this contract.

Significant changes in the character of work: The engineer reserves the right to make, in writing, at any time during the work, such changes in quantities and such alterations in the work as are necessary to satisfactorily complete the project. Such changes in quantities and alterations shall not invalidate the contract nor release the surety, and the contractor agrees to perform the work as altered.

If the alterations or changes in quantities significantly change the character of the work under the contract, whether or not changed by any such different quantities or alterations, an adjustment, excluding loss of anticipated profits, will be made to the contract. The basis for the adjustment shall be agreed upon prior to the performance of the work. If a basis cannot be agreed upon, then an adjustment will be made either for or against the contractor in such amount as the engineer may determine to be fair and equitable.

The term "significant change" shall be construed to apply only to the following circumstances:

- (A) When the character of the work as altered differs materially in kind or nature from that involved or included in the original proposed construction or
- (B) When a major item of work, as defined elsewhere in the contract, is increased in excess of 125 percent or decreased below 75 percent of the original contract quantity. Any allowance for an increase in quantity shall apply only to that portion in excess of 125 percent of original contract item quantity, or in case of a decrease below 75 percent, to the actual amount of work performed.

RIGHT TO AUDIT

The Department shall have the right to audit the books and records of the contractor or any subcontractor under this contract or subcontract to the extent that the books and records relate to the performance of the contract or subcontract. The books and records shall be maintained by the contractor for a period of 3 years from the date of final payment under the prime contract and by the subcontractor for a period of 3 years from the date of final payment under the subcontract (29 Del.C. §6930)

PREVAILING WAGES

Included in this proposal are the minimum wages to be paid various classes of laborers and mechanics as determined by the Department of Labor of the State of Delaware in accordance with Title 29 Del.C. §6960, relating to wages and the regulations implementing that Section.

REQUIREMENT BY DEPARTMENT OF LABOR FOR SWORN PAYROLL INFORMATION

Title 29 Del.C. §6960 stipulates;

- (b) Every contract based upon these specifications shall contain a stipulation that the employer shall pay all mechanics and laborers employed directly upon the site of the work, unconditionally and not less often than once a week and without subsequent deduction or rebate on any account, the full amounts accrued at time of payment, computed at wage rates not less than those stated in the specifications, regardless of any contractual relationship which may be alleged to exist between the employer and such laborers and mechanics. The specifications shall further stipulate that the scale of wages to be paid shall be posted by the employer in a prominent and easily accessible place at the site of the work, and that there may be withheld from the employer so much of accrued payments as may be considered necessary by the Department of Labor to pay to laborers and mechanics employed by the employer the difference between the rates of wages required by the contract to be paid laborers and mechanics on the work and rates of wages received by such laborers and mechanics to be remitted to the Department of Labor for distribution upon resolution of any claims.

(c) Every contract based upon these specifications shall contain a stipulation that sworn payroll information, as required by the Department of Labor, be furnished weekly. The Department of Labor shall keep and maintain the sworn payroll information for a period of 6 months from the last day of the work week covered by the payroll.

Bidders are specifically directed to note the Department of Labor's prevailing wage regulations implementing §6960 relating to the effective date of the wage rates, at Section 6.3, which in relevant part states:

"Public agencies (covered by the provisions of 29 Del.C. §6960) are required to use the rates which are in effect on the date of the publication of specifications for a given project. In the event that a contract is not executed within one hundred twenty (120) days from the date the specifications were published, the rates in effect at the time of the execution of the contract shall be the applicable rates for the project."

Contractor may contact:

Department of Labor, Division of Industrial Affairs, 4425 N. Market Street, Wilmington, DE 19802
Telephone (302) 761-8200.

STATE OF DELAWARE
DEPARTMENT OF LABOR
DIVISION OF INDUSTRIAL AFFAIRS
OFFICE OF LABOR LAW ENFORCEMENT
PHONE: 302 761 8200


Mailing Address:
4425 North Market St., 3rd Fl
Wilmington, DE 19802

Located at:
4425 North Market St., 3rd Fl
Wilmington, DE 19802

PREVAILING WAGES FOR HIGHWAY CONSTRUCTION EFFECTIVE MARCH 15, 2018

CLASSIFICATION	NEW CASTLE	KENT	SUSSEX
BRICKLAYERS	53.89	53.89	53.89
CARPENTERS	54.62	54.81	43.57
CEMENT FINISHERS	34.63	34.85	27.71
ELECTRICAL LINE WORKERS	24.02	46.36	22.69
ELECTRICIANS	68.70	68.70	68.70
IRON WORKERS	63.68	25.48	27.06
LABORERS	43.30	40.70	39.95
MILLWRIGHTS	17.20	16.69	14.41
PAINTERS	68.79	68.79	68.79
PILEDRIVERS	70.92	25.36	28.77
POWER EQUIPMENT OPERATORS	45.46	42.29	38.73
SHEET METAL WORKERS	24.30	21.68	19.64
TRUCK DRIVERS	36.49	30.14	36.72

CERTIFIED: 08/02/2018

BY: 

ADMINISTRATOR, OFFICE OF LABOR LAW ENFORCEMENT

NOTE: THESE RATES ARE PROMULGATED AND ENFORCED PURSUANT TO THE PREVAILING WAGE REGULATIONS ADOPTED BY THE DEPARTMENT OF LABOR ON APRIL 3, 1992.

CLASSIFICATIONS OF WORKERS ARE DETERMINED BY THE DEPARTMENT OF LABOR. FOR ASSISTANCE IN CLASSIFYING WORKERS, OR FOR A COPY OF THE REGULATIONS OR CLASSIFICATIONS, PHONE 302 761 8200

NON-REGISTERED APPRENTICES MUST BE PAID THE MECHANIC'S RATE.

PROJECT: T201806501.01 Patching and Thin Overlay Open End Central FY 18-20, Kent County

SPECIAL PROVISIONS

401502 - ASPHALT CEMENT COST ADJUSTMENT

For Sections 401, 402 and 403, payments to the Contractor shall be adjusted to reflect increases or decreases in the Delaware Posted Asphalt Cement Price when compared to the Project Asphalt Cement Base Price, as defined in these Special Provisions.

The Delaware Posted Asphalt Cement Price will be issued monthly by the Department and will be the industry posted price for Asphalt Cement, F.O.B. Philadelphia, Pennsylvania. The link for the [posting is here](#).

The Project Asphalt Cement Base Price will be the Delaware Posted Asphalt Cement Price in effect on the date of advertisement.

All deviations of the Delaware Posted Asphalt Cement Price from the Project Asphalt Cement Base Price are eligible for cost adjustment. No minimum increases or decreases or corresponding percentages are required to qualify for cost adjustment.

Actual quantity of asphalt cement qualifying for any Asphalt Cement Cost Adjustment will be computed using the weight of eligible asphalt that is shown on the QA/QC pay sheets as a percentage for the delivered material.

If the mix was not inspected and no QA/QC pay sheet was generated, then the asphalt percentage will be obtained from the job mix formula for that mix ID.

The asphalt percentage eligible for cost adjustment shall only be the virgin asphalt cement added to the mix.

There shall be no separate payment per ton cost of asphalt cement. That cost shall be included in the various unit prices bid per ton for those bid items that contain asphalt cement (mentioned above).

The Asphalt cement cost adjustment will be calculated on grade PG 64-22 asphalt regardless of the actual grade of asphalt used. The Project Asphalt Cement Base Price per ton for the project will be the Delaware Posted Asphalt Cement Price in effect on the date of project advertisement.

If the Contractor exceeds the authorized allotted completion time, the price of asphalt cement on the last authorized allotted work day, shall be the prices used for cost adjustment during the time liquidated damages are assessed. However, if the industry posted price for asphalt cement goes down, the asphalt-cement cost shall be adjusted downward accordingly.

NOTE:

Application of Asphalt Cement Cost Adjustment requirements as indicated above shall apply only to those contracts involving items related to bituminous base and pavements, and with bitumen, having a total of 1,000 tons or more of hot-mix bid quantity in case of Sections 401, 402 and 403.

5/05/15

404501 - BITUMINOUS ASPHALT TACK COAT

Description:

This work consists of furnishing and applying an un-cut PG 64-22 graded asphalt tack coat.

Materials:

Materials for tack coat shall conform to Section 1012 of the Standard Specifications. A Certificate of Analysis shall be submitted for each lot of material for approval.

Equipment:

Distributors. The distributors used shall be capable of uniformly applying the bituminous material in liquid form. Devices to control the pressure, volume, and temperature shall be provided. Each distributor shall have an approved calibration chart, be equipped with an approved sampling device, and conform to the following:

- a. *Pressure.* The pressure shall be supplied by a positive displacement pump or air compressor. The pressure shall be uniform throughout the entire width of spray. If pressure is supplied by an air compressor, automatic controls must be provided to maintain sufficient and even pressure throughout the application of an entire load.
- b. *Temperature.* The distributor shall be equipped with a heating system that applies heat uniformly across the width of the tank. Provisions shall be made for circulating or agitating the material whenever necessary while heating. The distributor shall be equipped with a thermometer marked in degrees Fahrenheit of sufficient range to determine the actual temperature of the material.
- c. *Tachometer.* All distributors shall be provided with an approved tachometer recording feet per minute with a tabulation of feet per load with adjustments. Each load tabulation shall start at zero. There shall also be a totaling tabulation of this instrument.
- d. *Volume.* A tachometer shall give correct readings of the speed, and the volumetric efficiency of the distributor shall ensure the correct volume at various speeds. Tests shall be required to prove the volumetric efficiency of the distributor at various speeds as directed by the Engineer.
- e. *Circulating System.* All pump distributors shall be equipped with a circulating system designed to maintain a homogenous liquid while circulating in the distributor tank. This circulating system shall also be arranged to circulate the material in the tank truck before application.

Air distributors shall be equipped with a device for agitating the bituminous material in the tank trucks when necessary.

- f. *Tests.* Necessary tests shall be made to determine the accuracy of all pressure gauges, tachometers, and pump efficiencies. The tests shall be made by the Contractor when and as required by the Engineer.
- g. *Spray Bars.* Each distributor shall be equipped with spray bars capable of applying material uniformly throughout the entire length of the spray bars when they are extended. Spray bar extensions shall be provided for applying up to a 12' width in one operation. Spray bars shall be equipped with a cleaning device and a shut-off valve to prevent dribbling, dripping, or streaking.
- h. *Tank Capacity Gauge.* A float or other approved type tank capacity gauge shall be furnished to indicate the volume in the tank in not less than 25 gal units. The gauge shall have adjustments for correction.

Tanks shall have a minimum capacity of 750 ga.

The rate of application of the distributor shall be calibrated by an approved method determined by the Engineer.

If the Engineer deems that the equipment applying the material is inadequate or fails to comply with all regulations, the Engineer will order the equipment to be removed from the job and require that another unit be placed on the work.

Heating and Application of Bituminous Material:

Bituminous materials used for each treatment shall be heated in a manner that ensures even heating of the entire mass and maintained within the specified temperature and pressure range during application. Any material which has been damaged shall be rejected, and any section treated with damaged material shall be removed and replaced.

The bituminous material shall be applied in one application at the rates specified using the pressure distributor for the full width of the paving operation, unless otherwise directed.

The nozzles of the spray bar shall be kept clean at all times. If one or more nozzles becomes blocked during the application of bituminous materials, the distributor shall be stopped immediately, and the nozzles shall be cleaned. The streaked areas shall be made uniform using a hand hose or other approved methods.

If the Contractor is unable to keep the application uniform, the operation shall be discontinued until a more experienced operator or a better distributor, or both, can be provided; or, the Contractor shall take such other precautions as may be necessary to keep the application within specified limits.

When applying bituminous materials adjacent to structures or curbs, the Contractor shall furnish and use effective means of protecting the structures or curbs from discoloration.

Construction Methods:

The surface upon which the tack coat is to be placed shall be cleaned thoroughly to the satisfaction of the Engineer. Tack coat shall be applied at a rate of 0.08 to 0.17 gal/yd², at a temperature of 310 to 340 °F. The application rate appropriate for the surface being overlaid shall be determined by the Engineer. This rate will be determined during the application of the warm-mix test strip. The tack coat should be a thin, uniform coating sufficient to bond the overlay to the underlying pavement. Tack coat shall be applied using pressurized distributing equipment with a spray bar or other approved distribution system. Tack coat shall be applied in advance of the hot-mix operation, but no further than 500 feet in front of the paver. All contact surfaces of curbing, gutters, manholes, and other facilities shall be coated with a uniform coat of hot asphalt cement (tack) just before the mixture is placed. During the application of tack coat, care shall be taken to prevent splattering of adjacent pavement, curb and gutter and structures. Prior to paving, the Contractor should verify that the tack coat has adequate adhesive properties. The Engineer may suspend paving operations until adequate adhesion is achieved.

Method of Measurement:

The quantity of Bituminous Asphalt Tack Coat will be measured as the actual number of gallons of tack coat applied. The quantity will be determined by any or all of the following methods and should be verified for accuracy by computations based on field measurements taken on and along the completed finished surfaces. Multiple layers will not be measured separately.

1. **Truck Measurement:** If bituminous materials are delivered to the Project in tank trucks, distributor tanks, or drums, the Contractor shall not remove any bituminous material from the transporting vehicle or container until necessary measurements have been made, nor shall the transporting vehicle or container be released until final outage has been measured. If weighing is not convenient, the Contractor shall furnish the Engineer with a certified chart showing the dimensions and volume of each container together with a gauge or calibrated measuring rod which will permit the volume of the material to be determined by vertical measurement.
2. **Metering:** The volume may be determined by metering, in which case the metering device used and the method of using it shall be subject to the approval of the Engineer.

3. **Time of Deliveries:** The arrival and departure of vehicles delivering bituminous materials to the Project site shall be so scheduled that the Engineer is afforded proper time for the measurements of delivered volume and final outage. The Engineer will make the necessary measurements only during the Contractor's normal daily working hours.

Basis of Payment:

The quantity of Bituminous Asphalt Tack Coat will be paid for at the Contract unit price per gallon. Price and payment will constitute full compensation for mobilizing and furnishing all equipment, materials, and labor; placing the material; and for all labor, equipment, tools and incidentals necessary to complete the work.

NOTE:

The Asphalt Cement Cost Adjustment for this item will use the conversion factor of 8.42 lb/gal. to convert to a weight for payment under item 401502 - Asphalt Cement Cost Adjustment.

6/28/2018

401517 - STONE MATRIX ASPHALT (SMA) WEARING SURFACE

Description:

This work shall consist of mixing and placement of SMA pavement on a prepared foundation in accordance with these specifications. The requirements of Section 401 Bituminous Pavement shall apply except as modified by this section.

Materials:

Aggregates used in SMA shall be non-carbonate.

Materials shall conform to the applicable requirements of Section 1000 with the following modifications.

Coarse Aggregate. Coarse aggregate for SMA shall conform to Section 1004 with the following modifications:

Test Property	Test Method	Specification Limits
Sodium Sulfate Soundness Loss,% Max. (5 cycles)	AASHTO T104	12
Absorption, % Max.	AASHTO T85	2.0
LA Abrasion Loss, % Max.	AASHTO T96	30
Flat and Elongated Particles: Retained on #4 Sieve, % Max. (Length to Thickness) 5:1 3:1	ASTM D4791	5 20

No gravel or slag shall be used in SMA mixes. A maximum of 10% RAP may be used.

Fine Aggregate. Fine aggregate shall consist of 100 % crushed aggregate and shall conform to the following:

Test Property	Test Method	Specification Limits
Sodium Sulfate Soundness Loss, % Max (5 cycles)	AASHTO T104	12
Sand Equivalent Value, % Min.	AASHTO T176	45
Uncompacted Void Content, % Min.	AASHTO T304	45
Liquid Limit, % Max.	AASHTO T89	25
Plasticity Index, %	AASHTO T90	Non-Plastic

Mineral Filler. Mineral filler shall conform to AASHTO M17 and shall be rock dust or crushed limestone free of organic impurities conforming to the following:

Test Property	Test Method	Specification Limits
Plasticity Index, % Max.	AASHTO T90	4

A sample of mineral filler shall be submitted to Materials & Research for hydrometer analysis performed as specified in AASHTO T88 for mineral filler.

Asphalt Cements. The asphalt cement shall be Superpave PG 76-22 Performance Grade Asphalt according to AASHTO M320, Table 1 and tested according to AASHTO R29.

Stabilizers. Stabilizers have been used to ensure the draindown requirements below are met (<0.3% draindown). Other technologies, in addition to various types of fibers, may be used in this item if test data and field performance demonstrate these specifications are met.

If cellulose fiber or mineral fiber stabilizers are chosen by the producer, they shall meet the requirements below and be specifically designed for use in hot-mix asphalt paving mixtures. The producer shall supply the Engineer with certified test results showing the stabilizers are specifically designed for hot-mix asphalt paving mixtures. A representative of the manufacturer of the stabilizers shall be present at initial production to provide technical assistance.

Cellulose Fibers. Cellulose fibers shall conform to the following requirements:

Test Property	Test Method	Specification Limits
Ash Content, % Non-Volatiles Max.	ASTM D128	23
pH	AASHTO MP8	6.5 to 8.5
Moisture Content, % Max by Mass	AASHTO MP8	5.0
Fiber Length, Max inches	AASHTO MP8	0.25

Mineral Fibers. Mineral fibers shall be made from virgin basalt, diabase, slag, or other silicious rock and shall conform to the following requirements:

Test Property	Test Method	Specification Limits
Fiber Length, Max inches	AASHTO MP8	0.25
Fiber Thickness, Max inches	AASHTO MP8	0.0002
Shot Content No. 60 Sieve No. 230 Sieve	ASTM C612	85 – 95 60 - 80

Antistripping Additives. An approved heat stable anti-stripping additive shall be added to the asphalt cement used for SMA if the TSR value dictates the need.

MIX DESIGN:

Aggregates. The washed gradation (AASHTO T11) of the final mixture for the SMA shall conform to the following gradation:

Sieve	% Passing
12.5 mm (1/2")	100
9.5 mm (3/8")	70 - 95
4.75 mm (#4)	30 - 50
2.36 mm (#8)	20 - 30
1.18 mm (#16)	0 - 21
0.60 mm (#30)	0 - 18
0.30 mm (#50)	0 - 15
0.075 mm (#200)	8.0 – 12.0

Mix Design. The SMA shall meet the following mix design parameters at 100 design gyrations ($N_d=100$) in the Superpave Gyrotory Compactor:

Property	Requirement
Air Voids, %	4.0
VMA, % Min.	18.0
Draindown at production temperature (AASHTO T305), % Max at 1 hour	0.30
Target Asphalt Content, % Min	6.0

Anti-Strip Additives. Tensile Strength Ratio (TSR) values, as determined by the AASHTO T283 Test Method, shall be a minimum of 80. If an anti-strip additive is required, the amount of the additive used shall be 0.25 to 1.0 % by weight of the asphalt cement as determined by the TSR testing, recommended by the additive manufacturer, and approved by the Engineer.

Stabilizer Content. The dosage rates of any stabilizing agent shall be determined by the Contractor to meet these specifications.

Plant Control:

Mineral Filler Supply. Mineral filler dust shall be added to the mixture in a consistent manner to ensure the job mix formula requirements are met. The mineral filler supply system shall be submitted to the Engineer for review and the approval of the submitted system will be at the discretion of the Engineer.

Stabilizer Supply System. When stabilizing additives are required in the mixture, a separate system for feeding shall be used to proportion the required amount into the mixture so that uniform distribution is obtained. The feeding system shall be interlocked into the production plant to ensure correct proportioning.

When a batch plant is used, the stabilizer shall be added through a separate inlet directly into the weigh hopper above the pugmill. The addition of the stabilizer shall be timed to occur during the hot aggregate charging of the hopper. Adequate dry mixing time is required to ensure proper blending of the aggregate and the stabilizer. Dry mixing time shall be increased 5 to 15 seconds. Wet mixing time shall be increased at least 5 seconds for the stabilizer to ensure adequate blending with asphalt cement.

When a drum plant is used, the stabilizer shall be added into the drum mixer to ensure complete blending of the stabilizer into the mix. For this purpose, when adding loose fiber, a separate fiber feeding system shall be utilized that can accurately and uniformly introduce fiber into the drum at such a rate as not to limit the normal production of mix through the drum. An in-line no-flow detector shall be installed in the output side of the fiber blower to ensure that a flow of fiber is entering the drum. It shall be connected to an approved alarm system which will indicate when fiber is not entering the drum. Also, an easily visible portion of the fiber feed tube shall be clear to allow the Engineer to ensure that fiber is flowing into the drum. At no time shall there be any evidence of fiber in the baghouse or returned/wasted baghouse fines.

All stabilizer addition systems shall be approved by the Engineer prior to start-up of the contract.

Construction Methods:

Demonstration:

Before proceeding with the actual production paving work, the Contractor shall demonstrate that an acceptable mix can be produced, placed, and compacted to these Specifications. A minimum of 100 tons of acceptable SMA material shall be produced, placed, and compacted utilizing all paving equipment that will be used on the mainline paving, over a suitable and representative hot-mix base, approved by the Engineer, outside the project limits.

Weather Restrictions:

Placement of SMA will be permitted only when the ambient and surface temperatures are at least 50 F and rising.

Hauling Units:

Hauling units shall be as specified in Section 401.03 and the following:

The time between plant mixing and shipment shall not exceed one half hour, i.e. the SMA shall not be stored in the silo for more than one half hour. The haul trucks shall deliver the SMA to a material transfer device capable of continuously re-mixing and/or re-blending the material internally to ensure that the SMA is free from physical and thermal segregation. The material transfer device shall be self-propelled and capable to move freely between delivery trucks and the asphalt paver, equipped with a hopper insert, without requiring additional equipment. The Engineer will evaluate the performance of the paving operation by measuring the temperature of the mat surface immediately behind the screed of the paver during placement to develop a temperature profile. Surface temperature profile measurements shall be taken transversely across the mat, at any time during the project, to determine if the equipment is working properly. Each temperature profile will consist of three surface temperature measurements; the location of the temperature measurements will be at the approximate center and one foot to three feet from the edge of each side of the mat parallel to the paver screed. The difference between the maximum and minimum temperature within each temperature profile shall not be more than 25°F.

If the difference between any two temperatures taken in a single profile exceeds 25°F, the paving operation shall be halted and adjustments made to ensure that the hot-mix placed is within the temperature profile requirements. Once adjustments are made, the Engineer will take measurements for an additional temperature profile to verify that corrective actions taken resulted in the mix placed meeting temperature differential requirements.

Mix Placement Temperature:

The temperature of the mixture at the time of placement shall not be less than 290 F.

Compaction:

The pavement shall be compacted to 94% of maximum theoretical density or 6% air voids. Item 401699 will be used by the Engineer to calculate payment for this item; Table 5 is modified as referenced below for this item:

Table 5: Compaction Price Adjustment Highway Locations	
<u>Degree of Compaction (%)</u>	<u>Pay Adjustment Factor (%)</u>
>97	-100*
96	-10
95	0
94	+5
93	0
92	-10
91	-15
90	-25
89	-30
88	-100*
*or remove and replace at Engineer's discretion.	

Opening to Traffic:

Traffic shall not be allowed on the finished roadway until the roadway temperature cools to at least 140°F.

Method of Measurement and Basis of Payment:

This work will be measured and paid for at the Contract unit price bid per ton for Stone Matrix Asphalt complete, in place, and accepted, which price and payment will be full compensation for furnishing, hauling, preparing and placing all materials; for labor, equipment, tools; and incidentals necessary to complete this item.

Materials produced and striping used for the demonstration will not be paid for but will be considered incidental to the item Stone Matrix Asphalt.

3/16/17

401699 - QUALITY CONTROL/QUALITY ASSURANCE OF BITUMINOUS CONCRETE

.01 Description

This item shall govern the Quality Assurance Testing for supplying bituminous asphalt plant materials and constructing bituminous asphalt pavements and the calculation for incentives and disincentives for materials and construction. The Engineer will evaluate all materials and construction for acceptance. The procedures for acceptance are described in this Section. Include the costs for all materials, labor, equipment, tools, and incidentals necessary to meet the requirements of this specification in the bid price per ton for the bituminous asphalt. Payment to the Contractor for the bituminous asphalt item(s) will be based on the Contract price per ton and the pay adjustments described in this specification.

.02 Bituminous Concrete Production – Quality Acceptance

(a) Material Production - Tests and Evaluations.

All acceptance tests shall be performed by qualified technicians at qualified laboratories following AASHTO or DelDOT procedures, and shall be evaluated using Quality Level Analysis. The Engineer will conduct acceptance tests. The Engineer will directly base acceptance on the acceptance test results, the asphalt cement quality, the Contractor's QC Plan work, and the comparisons of the acceptance test results to the QC test results. The Engineer may elect to utilize test results of the Contractor in some situations toward judging acceptance.

Supply and capture samples, as directed by the Engineer under the purview of the Engineer from delivery trucks before the trucks leave the production plant. Hand samples to the Engineer to be marked accordingly. The sample shall represent the material produced by the Contractor, and shall be of sufficient size to allow the Engineer to complete all required acceptance tests. The Engineer will direct the Contractor when to capture these samples, on a statistically random, unbiased basis, established before production begins each day based upon the anticipated production tonnage. The captured sample shall be from the Engineer specified delivery truck. The Contractor may visually inspect the specified delivery load during sampling and elect to reject the load. If the contractor elects to reject the specified delivery truck, each subsequent load will be inspected until a visually acceptable load is produced for acceptance testing. All visually rejected loads shall not be sent to a Department project.

The first sample of the production day will be randomly generated by the Engineer between loads 0 and 12 (0-250 tons). Subsequent samples will be randomly generated by the Engineer on 500-ton sub-lots for the production day. Samples not retrieved in accordance with the Contractor's QC plan will be deemed unacceptable and may be a basis for rejection of material produced. Parallel tests or dispute resolution tests will only be performed on material captured at the same time and location as the acceptance test sample. Parallel test samples or Dispute Resolution samples will be created by splitting a large sample or obtaining multiple samples that equally represent the material. The Engineer will perform all splitting and handling of material after it is obtained by the Contractor.

The Contractor may retain dispute resolution samples or perform parallel tests with the Engineer on any acceptance sample.

The Engineer will evaluate and accept the material on a lot basis. All the material within a lot shall have the same JMF (mixture ID). The lot size shall be targeted for 2000 tons or a maximum period of three days, whichever is reached first. If the 2000th ton target lot size is achieved during a production day, the lot size shall extend to the end of that production day. The Contractor may interrupt the production of one JMF in order to produce different material; this type of interruption will not alter the determination of the size or limits of material represented by a lot. The Engineer will evaluate each lot on a subplot basis. The size for each subplot shall be 100 to 500 tons and testing for the sub lots will be completed on a daily basis. For each subplot, the Engineer will evaluate one sample.

The target size of sub-lots within each lot, except for the first sample of the production day, is equal-sized 500 ton sub lots and will be based upon anticipated production, however, more or fewer sublots, with differing sizes, may result due to the production schedule and conditions. If the actual production is less than anticipated, and it's determined a sample will not be obtained (based upon the anticipated tonnage), a new sample location will be determined on a statistically random, unbiased basis based upon the new actual production. If the actual production is going to be 50 tons or greater over the anticipated sub lot production,

a new sample location will be determined on a statistically random, unbiased basis based upon the new actual production. The Engineer will combine the evaluation and test results for all of the applicable sublots in order to evaluate each individual lot.

If the Engineer is present, and the quantity exceeds 25 tons, a statistically random sample will be used for analysis. When the anticipated production is less than 100 tons and greater than 25 tons, and the Engineer is not present, the contractor shall randomly select a sample using the Engineer's random location program. The captured sample shall be placed in a suitable box, marked to the attention of the Engineer, and submitted to the Engineer for testing. A box sample shall also be obtained by the contractor at the same time and will be used as the Dispute Resolution sample if requested by the Engineer. The Contractor shall also obtain one liquid asphalt sample (1 pint) per grade of asphalt used per day and properly label it with all pertinent information.

The Engineer will conduct the following tests in order to characterize the material for the pavement compaction quality and to judge acceptance and the pay adjustment for the material:

- AASHTO T312 - Preparing and Determining the Density of Hot Mix Asphalt (HMA) Specimens by Means of the Superpave Gyrotory Compactor
- AASHTO T166, Method C (Rapid Method) - Bulk Specific Gravity of Compacted Hot Mix Asphalt (HMA) Using Saturated Surface Dry Specimens
- AASHTO T308 - Determining the Asphalt Binder Content of Hot Mix Asphalt (HMA) by the Ignition Method
- AASHTO T30 - Mechanical Analysis of Extracted Aggregate
- AASHTO T209 - Theoretical Maximum Specific Gravity and Density of Hot Mix Asphalt (HMA)
- ASTM D7227 - Standard Practice for Rapid Drying of Compacted Asphalt Specimens using Vacuum Drying Apparatus

(b) Pavement Construction - Tests and Evaluations.

The Engineer will directly base acceptance on the compaction acceptance test results, and on the inspection of the construction, the Contractor's QC Plan work, ride smoothness as referenced in the contract documents, lift thickness as referenced in the contract documents, joint quality as referenced in the contract documents, surface texture as referenced in the contract documents, and possibly the comparisons of the acceptance test results to the independent test results. For the compaction acceptance testing, the Engineer will sample the work on a statistically random basis, and will test and evaluate the work based on daily production.

Notify the Engineer of any locations within that road segment that may not be suitable to achieve minimum (93%) compaction due to existing conditions prior to paving the road segment. Schedule and hold a meeting in the field with the Engineer in order to discuss all areas that may potentially be applicable to Table 5a before paving starts. Areas that will be considered for Table 5a will be investigated in accordance to the method described in Appendix B. If this meeting is not held prior to paving, no areas will be considered for Table 5a. Areas of allowable exemptions that will not be cored include the following: partial-depth patch areas, driveway entrances, paving locations of less than 100 tons, areas around manholes and driveway entrances, and areas of paving that are under 400 feet in continuous total length and/or 5 feet in width.

The exempt areas around manholes will be a maximum of 4 feet transversely on either side from the center of the manhole, and 20 feet longitudinally on either side from the center of the manhole. The exempt areas around driveway entrances shall be the entire width of the driveway, and 3 feet from the edge of the longitudinal joint next to the driveway. Areas of exemption that will be cored for informational purposes only include: areas where the mat thickness is less than three times the nominal maximum aggregate size as directed by the Engineer, violations of Section 401.08 in the Standard Specifications as directed by the Engineer, and areas shown to contain questionable subgrade properties as proven by substantial yielding under a fully legally loaded truck. Failure to obtain core samples in these areas will result in zero payment for compaction regardless of the exempt status. The Engineer will evaluate and accept the compaction work on a daily basis. Payment for the compaction will be calculated by using the material production lots as referenced in **.02 Acceptance Plan (a) Material Production - B Tests and Evaluation** and analyzing the compaction results over the individual days covered in the material production lot. The compaction results will be combined with the material results to obtain a payment for this item.

The minimum size of a compaction lot shall be 100 tons. If the compaction lot is between 101 and 1000 tons, the Engineer shall randomly determine four compaction acceptance test locations. If the compaction lot is between 1001 and 1500 tons, the Engineer shall randomly determine six compaction acceptance test locations. If the compaction lot is between 1501 and 2000 tons, the Engineer shall randomly determine eight compaction acceptance test locations. If the compaction lot is greater than 2000 tons, the Engineer shall randomly determine two compaction acceptance test locations per 500 tons.

If a randomly selected area falls within an Engineer approved exemption area, the Engineer will select one more randomly generated location to be tested per the requirements of this Specification. If that cannot be accomplished, or if an entire location has been declared exempt, the compaction testing shall be performed as per these Specifications but a note will be added to the results that the location was an Engineer approved exempt location.

Testing locations will be a minimum of 1.0 feet from the newly placed longitudinal joint and 50 feet from a new transverse joint.

Cut one six (6) inch diameter core through the full lift depth at the exact location marked by the Engineer. Cores submitted that are not from the location designated by the Engineer will not be tested and will be paid at zero pay.

Notify the Engineer prior to starting paving operations with approximate tonnage to be placed. The Contractor is then responsible for notifying the appropriate Engineer test personnel within 12 hours of material placement. The Engineer will mark core locations within 24 hours of notification. After determination of locations, the Contractor shall complete testing within two operational days of the locations being marked. If the cores are not cut within two operational days, the area in question will be paid at zero pay for compaction testing.

Provide any traffic control required for the structural number investigation, sampling, and testing work at no additional cost to the Department.

Commence coring of the pavement after the pavement has cooled to a temperature of 140°F or less. Cut each core with care in order to prevent damaging the core. Damaged cores will not be tested. Label each core with contract number, date of construction, and number XX of XX upon removal from the roadway. Place cores in a 6-inch diameter plastic concrete cylinder mold or approved substitute for protection. Separate cores in the same cylinder mold with paper. Attach a completed QC test record for the represented area with the corresponding cores. The Engineer will also complete a test record for areas tested for the QA report and provide to Materials & Research. Deliver the cores to the Engineer for testing, processing, and report distribution at the end of each production day.

Repair core holes per Appendix A, Repairing Core Holes in Bituminous Asphalt Pavements. Core holes shall be filled immediately. Failure to repair core holes at the time of coring will result in zero pay for compaction testing for the area in question.

The Engineer will conduct the following tests on the applicable portion of the cores in order to evaluate their quality:

- AASHTO T166, Method C (Rapid Method) – Bulk Specific Gravity of Compacted Hot Mix Asphalt (HMA) Using Saturated Surface Dry Specimens
- AASHTO T209 - Theoretical Maximum Specific Gravity and Density of Hot Mix Asphalt
- ASTM D7227 - Standard Practice for Rapid Drying of Compacted Asphalt Specimens using Vacuum Drying Apparatus

The Engineer will use the average of the last five test values of the same JMF (mixture ID) material at the production plant in order to calculate the average theoretical maximum specific gravity of the cores. The average will be based on the production days test results and as many test results needed from previous days production to have an average of five samples. If there are less than five values available, the Engineer will use the JMF design value in addition to the available values to calculate the average theoretical maximum specific gravity.

.03 Payment and Pay Adjustment Factors.

The Engineer will determine pay adjustments for the bituminous asphalt item(s) in accordance with this specification. The Engineer will determine a pay adjustment factor for the material produced and a pay adjustment factor for the pavement construction. Pay adjustments for material and construction will be calculated independently. When the pay adjustment calculation for either material or construction falls to zero payment per tables 4, 5, or 5a, the maximum pay adjustment for the other factor will not exceed 100.

Pay Adjustment factors will only be calculated on in place material. Removed material will not be used in payment adjustment calculations.

Material Production Pay Adjustments will be calculated based upon 70% of the contract unit price and calculated according to section .03(a) of this specification. Pavement construction Pay Adjustments will be calculated based upon 30% of the contract unit price and calculated according to section .03(b) of this specification.

(a) Material Production - Pay Adjustment.

Calculate the material pay adjustment by evaluating the production material based on the following parameters:

Table 2 - Material Parameter Weight Factors		
Material Parameter	Single Test Tolerance (+/-)	Weight Factor
Asphalt Content	0.4	0.30
#8 Sieve (>=19.0 mm)	7.0	0.30
#8 Sieve (<=12.5 mm)	5.0	0.30
#200 Sieve (0.075mm Sieve)	2.0	0.30
Air Voids (4.0% Target)	2.0	0.10

Using the JMF target value, the single test tolerance (from Table 2), and the test values, the Engineer will use the following steps to determine the material pay adjustment factor for each lot of material:

1. For each parameter, calculate the mean value and the standard deviation of the test values for the lot to the nearest 0.1 unit.
2. For each parameter, calculate the Upper Quality Index (QU):
 $QU = ((JMF \text{ target}) + (\text{single test tolerance}) - (\text{mean value})) / (\text{standard deviation}).$
3. For each parameter, calculate the Lower Quality Index (QL):
 $QL = ((\text{mean value}) - (JMF \text{ target}) + (\text{single test tolerance})) / (\text{standard deviation}).$
4. For each parameter, locate the values for the Upper Payment Limit (PU) and the Lower Payment Limit (PL) from Table 3 - Quality Level Analysis by the Standard Deviation Method. (Use the column for “n” representing the number of sublots in the lot. Use the closest value on the table when the exact value is not listed).
5. Calculate the PWL for each parameter from the values located in the previous step:
 $PWL = PU + PL - 100.$
6. Calculate each parameter’s contribution to the payment adjustment by multiplying its PWL by the weight factor shown in Table 2 for that parameter.
7. Add the calculated adjustments of all the parameters together to determine the Composite PWL for the lot.
8. From Table 4, locate the value of the Pay Adjustment Factor corresponding to the calculated PWL. When all properties of a single test are within the single test tolerance of Table 2, Pay Adjustment factors shall be determined by Column B. When any property of a single test is outside of the Single Test Tolerance parameters defined in Table 2, the Material Pay Adjustment factor shall be determined by Column C.
9. For each lot, determine the final material price adjustment:

Final Material Pay Adjustment =
 (Lot Quantity) x (Item Bid Price) x (Pay Adjustment Factor) x 70%. This final pay calculation will be paid to the cent.

In lieu of being assessed a pay adjustment penalty, the Contractor may choose to remove and replace the material at no additional cost to the Department. When the PWL of any material parameter in Table 2 is below 60, the Engineer may require the removal and replacement of the material at no additional cost to the Department. Test results on removed material shall not be used in calculation of future PWL calculations for Mixture ID.

The test results from the Engineer on production that is less than 100 tons will be combined with the two most recently completed Engineer tests with the same Mixture ID to calculate payment for the lot encompassing the single test. If that cannot be accomplished, the approved JMF will be used to calculate payment for the lot encompassing the single test. Payment for previously closed lots will not be affected by the analysis.

When a sample is outside of the allowable single test tolerance for any Materials criteria in Table 2, that sample will be isolated. For payment purposes, the test result of the out of acceptable tolerance sample will be combined with the two previous acceptable samples of the same JMF and analyzed per this specification. The material that is considered out of the acceptable tolerance will only include the material within the represented sub-lot (i.e., a maximum of 500 tons). If the previous acceptable test result is from the previous production day, only the material produced on the second production day will be considered out of tolerance. All future sub lots will not include the isolated test. The pay factors for the out of tolerance sample lot will be calculated using column C of table 4.

If, during production, a QA sample test result does not meet the acceptable tolerances and the Contractors QC sample duplicates the QA sample test result, the Contractor can make an appropriate change to the mixture (within the JMF boundaries), and request to have that sample further isolated. After the Contractor has made appropriate changes, the Contractor will visually inspect each produced load. The first visually acceptable load will be sampled and tested. If that sample test result shows compliance with the specifications, the material that is considered out of the acceptable tolerance will include the material from the previous acceptable test result to the third load after the initially sampled and tested sample. If the sample does not meet the specification requirements, the Engineer will no longer accept material. Production may resume when changes have been made and an acceptable sample and test result is obtained.

Table 3 – Quality Level Analysis by the Standard Deviation Method							
PU or PL	QU and QL for “n” Samples						
	n = 3	n = 4	n = 5	n = 6	n = 7	n = 8	n = 9
100	1.16	1.50	1.79	2.03	2.23	2.39	2.53
99	-	1.47	1.67	1.80	1.89	1.95	2.00
98	1.15	1.44	1.60	1.70	1.76	1.81	1.84
97	-	1.41	1.54	1.62	1.67	1.70	1.72
96	1.14	1.38	1.49	1.55	1.59	1.61	1.63
95	-	1.35	1.44	1.49	1.52	1.54	1.55
94	1.13	1.32	1.39	1.43	1.46	1.47	1.48
93	-	1.29	1.35	1.38	1.40	1.41	1.42
92	1.12	1.26	1.31	1.33	1.35	1.36	1.36
91	1.11	1.23	1.27	1.29	1.30	1.30	1.31
90	1.10	1.20	1.23	1.24	1.25	1.25	1.26
89	1.09	1.17	1.19	1.20	1.20	1.21	1.21
88	1.07	1.14	1.15	1.16	1.16	1.16	1.17
87	1.06	1.11	1.12	1.12	1.12	1.12	1.12
86	1.04	1.08	1.08	1.08	1.08	1.08	1.08
85	1.03	1.05	1.05	1.04	1.04	1.04	1.04

84	1.01	1.02	1.01	1.01	1.00	1.00	1.00
83	1.00	0.99	0.98	0.97	0.97	0.96	0.96
82	0.97	0.96	0.95	0.94	0.93	0.93	0.93
81	0.96	0.93	0.91	0.90	0.90	0.89	0.89
80	0.93	0.90	0.88	0.87	0.86	0.86	0.86
79	0.91	0.87	0.85	0.84	0.83	0.82	0.82
78	0.89	0.84	0.82	0.80	0.80	0.79	0.79
77	0.87	0.81	0.78	0.77	0.76	0.76	0.76
76	0.84	0.78	0.75	0.74	0.73	0.73	0.72
75	0.82	0.75	0.72	0.71	0.70	0.70	0.69
74	0.79	0.72	0.69	0.68	0.67	0.66	0.66
73	0.75	0.69	0.66	0.65	0.64	0.63	0.63
72	0.74	0.66	0.63	0.62	0.61	0.60	0.60
71	0.71	0.63	0.60	0.59	0.58	0.57	0.57
70	0.68	0.60	0.57	0.56	0.55	0.55	0.54
69	0.65	0.57	0.54	0.53	0.52	0.52	0.51
68	0.62	0.54	0.51	0.50	0.49	0.49	0.48
67	0.59	0.51	0.47	0.47	0.46	0.46	0.46
66	0.56	0.48	0.45	0.44	0.44	0.43	0.43
65	0.52	0.45	0.43	0.41	0.41	0.40	0.40
64	0.49	0.42	0.40	0.39	0.38	0.38	0.37
63	0.46	0.39	0.37	0.36	0.35	0.35	0.35
62	0.43	0.36	0.34	0.33	0.32	0.32	0.32

Table 3 – Quality Level Analysis by the Standard Deviation Method

PU or PL	QU and QL for “n” Samples						
	n = 3	n = 4	n = 5	n = 6	n = 7	n = 8	n = 9
61	0.39	0.33	0.31	0.30	0.30	0.29	0.29
60	0.36	0.30	0.28	0.27	0.27	0.27	0.26
59	0.32	0.27	0.25	0.25	0.24	0.24	0.24

Table 4 - PWL Pay Adjustment Factors

PWL	Pay Adjustment Factor (%) Column B	Pay Adjustment Factor (%) Column C
100	+5	0
99	+4	-1
98	+3	-2
97	+2	-3
96	+1	-4
95	0	-5
94	-1	-6
93	-2	-7

92	-3	-8
91	-4	-9
PWL<91	PWL - 100	PWL - 100

(b) Pavement Construction - Pay Adjustments.

The Engineer will determine the pavement construction pay adjustment by evaluating the construction of the pavement, based on the following parameter:

- Degree of compaction of the in-place material

Using the test values for the cores, the Engineer will use the following steps to determine the pavement construction pay adjustment for each lot of work.

1. Calculate the core bulk specific gravity values from the subplot tests values, to the nearest 0.001 unit. Obtain the Theoretical maximum Specific Gravity values from the corresponding laboratory subplot tests.
2. Calculate the Degree of Compaction:
Degree of Compaction =
((Core Bulk Specific Gravity) / (Theoretical Maximum Specific Gravity)) x 100% recorded to the nearest 0.1%.
3. The average compaction for the sublots shall be averaged together for the compaction level of the lot. The lots compaction test level shall be averaged and recorded to the nearest whole percent.
4. Locate the value of the Payment Adjustment Factor corresponding to the calculated degree of compaction from Table 5 or Table 5a.
5. Determine the pavement construction price adjustment by using the following formula:
Construction Pay adjustment = (Lot Quantity) x (Bid Price) x (Pay Adjustment Factor) x 30%.

Table 5: Compaction Price Adjustment Highway Locations		
Degree of Compaction (%)	Range	Pay Adjustment Factor (%)
>= 97.0	>= 96.75	-100*
96.5	96.26 – 96.74	-5
96.0	95.75 – 96.25	-3
95.5	95.26 – 95.74	-2
95.0	94.75 – 95.25	0
94.5	94.26 – 94.74	0
94.0	93.75 – 94.25	1
93.5	93.26 – 93.74	3
93.0	92.75 – 93.25	5
92.5	92.26 – 92.74	3

92.0	91.75 – 92.25	0
91.5	91.26 – 91.74	0
91.0	90.75 – 91.25	-5
90.5	90.26 – 90.74	-15
90.0	89.75 – 90.25	-20
89.5	89.26 – 89.74	-25
89.0	88.75 – 89.25	-30
88.5	88.26 – 88.74	-50
=<88.0	=<88.25	-100*

* or remove and replace it at Engineer's discretion

Table 5A: Compaction Price Adjustment Other¹ Locations		
Degree of Compaction	Range	Pay Adjustment Factor (%)
>= 97.0	>= 96.75	-100*
96.5	96.26 – 96.74	-5
96.0	95.75 – 96.25	-3
95.5	95.26 – 95.74	-2
95.0	94.75 – 95.25	0
94.5	94.26 – 94.74	0
94.0	93.75 – 94.25	0
93.5	93.26 – 93.74	1
93.0	92.75 – 93.25	3
92.5	92.26 – 92.74	1
92.0	91.75 – 92.25	0
91.5	91.26 – 91.74	0
91.0	90.75 – 91.25	0
90.5	90.26 – 90.74	0
90.0	89.75 – 90.25	0
89.5	89.26 – 89.74	0
89.0	88.75 – 89.25	-1
88.5	88.26 – 88.74	-3
88.0	87.75 – 88.25	-5
87.5	87.26 – 87.74	-10
87.0	86.75 – 87.25	-15

86.5	86.26 – 86.74	-20
86.0	85.75 – 86.25	-25
85.5	85.26 – 85.74	-30
85.0	84.75 – 85.25	-40
84.5	84.26 – 84.74	-50
=< 84.0	=<84.25	-100*

* or remove and replace at Engineer's discretion

¹ This chart is to be used for areas where the structural value of the area to be paved is less than 1.75 as determined by the Engineer. See Appendix B - Method for Obtaining Cores for Determination of Roadway Structure. This chart is applicable to rehabilitation work only; full depth construction will not be considered for Table 5a.

.04 Dispute Resolution.

Disputes or questions about any test result shall be brought to the attention of the Contractor and the Engineer within two operational days of reported test results. The following dispute resolution procedures will be used.

The Engineer and the Contractor will review the sample quality, the test method, the laboratory equipment, and the laboratory technician. If these factors are not the cause of the dispute, a third party dispute resolution will be used.

Third party resolution testing can be performed at either another Contractor’s laboratory, the Engineer’s laboratory, or an independent accredited laboratory. Unless otherwise mutually agreed upon by DAPA and the Engineer, the Engineer’s qualified laboratory in Dover and qualified personnel shall conduct the necessary testing for third party Dispute Resolution after the Engineer has provided reasonable notice to allow the Contractor to witness this testing.

When disputes over production testing occur, the samples used for Dispute Resolution testing will be those samples the properly captured, labeled, and stored, as described in the second paragraph of the section of these specifications titled **.02 Acceptance Plan, (a) Material Production - Tests and Evaluations**. If no samples are available, the original testing results will be used for payment calculations.

Dispute Resolution samples for air void content will be heated by a microwave oven.

If there is a discrepancy between the Engineer’s acceptance test result and the Contractor’s test result, the Contractor may ask for the Dispute Resolution sample to be tested. The Contractor may request up to two dispute resolution samples be tested per calendar year without charge. Any additional Dispute Resolution samples run at the Contractors request where the results substantiate the acceptance test result will be assessed a fee of \$125. Any additional Dispute Resolution samples that substantiate the Contractors test result will not be assessed the fee.

When disputes over compaction core test results occur, the Engineer’s acceptance core will be used for the dispute resolution sample. The Contractor will be advised on when the testing will occur as referenced above to witness the testing. The results of the dispute resolution testing shall replace all of the applicable disputed test results for payment purposes.

Appendix A - Repairing Core Holes in Bituminous Asphalt Pavement

Description.

This appendix describes the procedure required to repair core holes in a bituminous concrete pavement.

Materials and Equipment.

The following material shall be available to complete this work:

- Patch Material - DelDOT approved High Performance Cold Patch material shall be used.

The following equipment shall be available to complete this work:

- Sponge or other absorbent material - Used to extract water from the hole.
- Compaction Hammer - mechanical (electrical, pneumatic, or gasoline driven) tamping device with a flat, circular tamping face smaller than 6 inches in diameter.

Construction Method.

After core removal from the hole, remove all excess water from within the hole, and prevent water from re-entering the hole.

Place the patch material in lifts no greater than 3 inches and compact with mechanical tamping device. If the hole is deeper than 3 inches, use two lifts of approximately equal depths so that optimum compaction is achieved. Make sure that the patch surface matches the grade of the existing roadway. Make every effort to achieve the greatest possible compaction

Performance Requirements.

The Engineer will judge the patch on the following basis:

- The patch shall be well compacted
- The patch surface shall match the grade of the surrounding roadway surface.

Basis of Payment.

No measurement or payment will be made for the patching work. The Contractor must gain the Engineer's acceptance of the patching work before the Engineer will accept the material represented by the core.

Appendix B - Method for Obtaining Cores for Determination of Roadway Structure

The Contractor is responsible for obtaining cores in areas that they propose are eligible for compaction price adjustments according to Table 5a in this specification. Table 5a is not applicable for new full-depth pavement box construction. Cores submitted for this process shall be obtained according to the following process.

1. Contact Materials & Research (M&R) personnel to determine if information about the area is already available. If M&R has already obtained cores in the location that is being investigated, the contractor may opt to use the laboratory information for the investigation and not core the area on their own.
2. If M&R does not have information concerning the section of the roadway, the contractor needs to contact M&R to arrange for verification of coring operations. Arrangements shall be made to allow for an individual from M&R to be on the site when the cores are obtained. Cores will be turned over to M&R for evaluation.
3. The Contractor is responsible for providing all traffic control and repairing core holes in accordance to 401699 Appendix A - Repairing Core Holes in Bituminous Asphalt Pavements.
4. Cores are to be taken throughout the entire project for the area in question. Cores will be spaced, from the start of the project in increments determined based on field and project specifics. Cores will be evenly distributed throughout the project location. The cores will be taken in the center of the lane in question.
5. Additional cores may be taken at other locations, if surface conditions indicate that there may be a substantial difference in the underlying section. The location of these cores should be documented and submitted to M&R.
6. Cores shall be full depth and include underlying materials. If there is a stone base included in the pavement section, at a minimum 1 core must have information concerning the thickness of the base. This is determined by augering to the subgrade surface.
7. The calculations used to determine the structural capacity of the roadway is as follows. If the contractor finds, upon starting the coring process, that the areas are of greater thickness than applicable to Table 5a, they may terminate the coring process on their own and retract the request.

Structural Number Calculations

Each pavement box material is assigned a structural coefficient based upon AASHTO design guides. The structural coefficient is used to determine the total strength of the pavement section.

Materials used in older pavement sections are assigned lower structural coefficients to compensate for aging of the materials. The coefficients used to determine the structural number of an existing pavement are:

Existing Material	Structural Coefficient
HMA	0.32
Asphalt Treated Base	0.26
Soil Cement	0.16
Surface Treatment (Tar & Chip)	0.10
GABC	0.14
Concrete	0 - 0.7*

* The Structural Coefficient of Concrete is dependent upon the condition of the concrete. Compressive strengths & ASR analysis are used to determine condition - contact the Engineer if this situation arises.

Newly placed materials use a different set of structural coefficients. They are as follows:

New Material	Structural Coefficient
HMA	0.40
Asphalt Treated Base (BCBC)	0.32
Soil Cement	0.20
GABC	0.14

Example:

Location includes placement of a 1.25" Type C overlay on 2.25" Type B. Existing roadway is cored and is shown to consist of 2" HMA on 7" GABC.

Calculation:

For the Type B lift the calculation would be:

Existing HMA	$2 * 0.32 =$	0.64
GABC	$7 * 0.14 =$	0.98
		<hr/>
		1.62

For the Type C lift the calculation would be:

Newly Placed B	$2.25 * 0.4 =$	0.90
Existing HMA	$2 * 0.32 =$	0.64
GABC	$7 * 0.14 =$	0.98
		<hr/>
		2.52

503503 - PATCHING CONCRETE

Description:

This item consists of furnishing and placing Portland Cement Concrete, conforming to the requirements of Section 503 of the Standard Specifications and/or as modified herein under this Contract. After removal of the existing P.C.C. pavement, if the base material is unsuitable or washed out, the unsuitable material shall be excavated and the void replaced with the same concrete used in the patch area. This additional depth shall not exceed 6" from the bottom of the existing P.C.C. Pavement. Excessive moisture remaining after excavation, shall require construction of a pipe underdrain system, when directed by the Engineer and as shown on the Plans. All excavation below the bottom of existing pavement shall be paid for under the item "Undercut Excavation, Patching".

This item may also be used in areas of composite pavements (hot-mix over concrete) if the Contractor elects to pour concrete patch flush with existing hot-mix pavement to eliminate grade differential. This additional depth shall be as directed by the Engineer, but shall not exceed 6" in depth.

Method of Measurement:

The quantity of concrete patching will be measured as the actual number of square yards per inch of thickness of additional thickness either above or below the existing concrete pavement. The area measured shall be the square yards on the surface of the base course and the depth measured in inches from either top or bottom of the original P.C.C. pavement as determined from the adjacent pavement. The depth shall be as directed by the Engineer, but shall not exceed 6" in measurement or payment.

Basis of Payment:

The quantity of concrete patching will be paid for at the Contract unit price per square yard per inch of thickness. Price and payment will constitute full compensation for furnishing and placing additional depth of concrete as described above, for all labor, tools, equipment, and incidentals to complete the item.

NOTE

Also, under the items 503001 - Patching P.C.C. Pavement, 6" to 15", Type A and 503002 - Patching P.C.C. Pavement, Greater than 15" to 100", Type B, the Contractor shall be paid for the additional thickness of concrete actually poured in the field above the thickness specified on the P.C.C. Patching Plans at a the Contract unit price per square yard per inch of thickness.

7/25/2018

801500 - MAINTENANCE OF TRAFFIC - ALL INCLUSIVE

Description:

This item shall consist of furnishing, installing, maintaining and/or relocating the necessary temporary traffic control devices used to maintain vehicular, bicycle and pedestrian traffic, including persons with disabilities in accordance with the Americans with Disabilities Act, as amended. All work shall be performed in a manner that will provide reasonably safe passage with the least practicable obstruction to all users, including vehicular, bicycle and pedestrian traffic.

All requirements of the Delaware Manual on Uniform Traffic Control Devices (MUTCD), Part 6, herein referred to as the Delaware MUTCD. (latest edition with all revisions made up to the date of Advertisement of this project) shall apply for all temporary traffic control devices. Any, and all, control, direction, management and maintenance of traffic shall be performed in accordance with the requirements of the Delaware MUTCD, notes on the Plans, this specification, and as directed by the Engineer.

The Contractor shall be aware that the Case Diagrams and safety measures outlined in the Delaware MUTCD are for common construction situations and modifications may be warranted based on the complexity of the job. The Contractor shall submit justification for modifications to the Temporary Traffic Control Plan (TTCP) to the Engineer for approval prior to implementation.

The Department reserves the right to impose additional restrictions, as needed, for the operational movement and safety of the traveling public. The Department reserves the right to suspend the Contractor's operations until compliance with the Engineer's directive for remedial action, based on but not limited to the following reasons:

1. The Contractor's operations are not in compliance with the Delaware MUTCD, the specifications or the Plans.
2. The Contractor's operations have been deemed unsafe by the Traffic Safety Engineer or District Safety Officer.

Materials and Construction Methods:

The Contractor shall submit a Temporary Traffic Control Plan (TTCP) or a Letter of Intent to use the Plan recommended Delaware MUTCD Case Diagram(s) at or prior to the pre-construction meeting. The Contractor shall submit the TTCP for all Contractor and subcontractor work to be performed on the project for the Department's approval before the start of work.

When specified by a note in the Plans, the Contractor shall be required to have an American Traffic Safety Services Association (ATSSA) certified Traffic Control Supervisor on the project. The authorized designee must be assigned adequate authority, by the Contractor, to ensure compliance with the requirements of the Delaware MUTCD and provide remedial action when deemed necessary by the Traffic Safety Engineer or the District Safety Officer. The ATSSA certified Traffic Control Supervisor's sole responsibility shall be the maintenance of traffic throughout the project. This responsibility shall include, but is not limited to, the installation, operations, maintenance and service of temporary traffic control devices. Also required is the daily maintenance of a log to record maintenance of traffic activities, i.e., number and location of temporary traffic control devices; and times of installation, changes and repairs to temporary traffic control devices. The ATSSA Traffic Control Supervisor shall serve as the liaison with the Engineer concerning the Contractor's maintenance of traffic. The name, contact number and certification for the designated Traffic Control Supervisor shall be submitted at or prior to the pre-construction meeting. The cost of the ATSSA certified Traffic Control Supervisor shall be incidental to this item.

Temporary traffic control devices shall be maintained in good condition in accordance with the brochure entitled "Quality Guidelines for Temporary Traffic Control Devices", published by the American Traffic Safety Services Association (ATSSA). Any temporary traffic control devices that do not meet the quality guidelines shall be removed and replaced with acceptable devices. Failure to comply will result in work stoppage with time charges continuing to be assessed.

Any existing signs that conflict with any temporary or permanent construction signs shall be covered as needed or as directed by the Engineer. The cost for temporarily covering conflicting signs shall be incidental to this item.

Access to all transit stops located within the project limits shall be maintained unless otherwise directed by the Plans or the Engineer. Maintaining access shall include maintaining an area for the transit vehicle and also an accessible path for pedestrians to safely access the transit stop.

The Contractor shall notify the Engineer, in writing, no less than fourteen (14) calendar days prior to the start of any detour(s) and road closures. The Engineer will notify the following entities:

- Local 911 Center
- Local School Districts
- Local Post Offices
- DelDOT's Transportation Management Center (TMC)
- Town Managers
- Local Police
- DelDOT's Public Relations
- Delaware Transit Corporation (DTC)

Immediately prior to the implementation of any lane or road closures, the Engineer shall notify the DelDOT TMC at (302) 659-4600. Notifications shall also be provided when the closures are lifted. The Engineer shall notify TMC and the District Safety Officer if any lane closures cannot be removed prior to the end of the allowable work hours.

The Contractor shall notify the local 911 center if access to a fire hydrant is temporarily restricted. The Contractor shall provide written confirmation to the Engineer that the local 911 center has been notified.

If a detour is required during any part or the entire period of this Contract, an approved detour plan shall be obtained from the Department's Traffic Safety Section. All signs, barricades and other temporary traffic control devices required as part of the approved detour plan shall be installed and maintained by the Contractor on the route that is closed and on the detour route. Road closures without an approved detour plan shall not be allowed. If a road is closed without an approved detour plan, the Contractor's operations shall be stopped immediately.

The Contractor shall provide and maintain ingress and egress for each property abutting the construction area and each property located between the diversion points of any detour and the actual construction site. Construction activities which may temporarily or otherwise interfere with property access shall be coordinated in advance with the affected property owners.

The Contractor shall conduct construction operations in a manner which will minimize delays to traffic, and shall meet the following requirements:

1. If work is being performed within 200 feet in any direction of an intersection that is controlled by a traffic signal, the flagger(s) shall direct the flow of traffic in concert with the traffic signals in construction areas to avoid queuing, unless active work prohibits such action. The flagger shall direct traffic to prevent traffic from queuing through an intersection (i.e., blocking an intersection). Only a Traffic Officer may direct traffic against the operation of a traffic signal and only until the operation occurring within the intersection is completed.
2. When a lane adjacent to an open lane is closed to travel, the temporary traffic control devices shall be set 2 feet (0.61 m) into the closed lane from the edge of the open lane, unless an uncured patch exists or actual work is being performed closer to the open lane with minimum restriction to traffic.
3. Except for "buffer lanes" on high volume and/or high speed roadways, lanes shall not be closed unless construction activity requiring lane closure is taking place, or will take place within the next hour. Lanes shall be reopened immediately upon completion of the work. Moving operations will require the lane closures be shortened as the work progresses and as traffic conditions warrant to minimize the length of the closure. The Contractor shall conduct construction operations in a manner so as to minimize disruption to traffic during

peak hours and periods of heavy flow. The Department reserves the right to stop or change the Contractor's operations, if in the opinion of the Engineer, such operations are unnecessary at that time or the operations are unnecessarily impeding traffic.

4. Work in the vicinity of traffic signals, shall be scheduled to minimize the time during which the signal is operated without detectors, and prior approval from the Engineer shall be required. TMC shall be notified in advance of cutting a loop detector, and be immediately notified once the loop detector has been reinstalled. The Contractor shall provide sufficient advance notice of the loop detector work with the Engineer to ensure the aforementioned requirements are met.

It is required that all temporary traffic control work and related items shall either be performed entirely by the Contractor's own organization, or totally subcontracted. Maintenance of equipment shall not be subject to this requirement.

Any deficiencies related to temporary traffic control that are reported to the Contractor in writing shall be corrected within 24 hours or as directed by the Engineer. Failure to comply will result in non-payment for those devices that are found to be deficient for the duration of the deficiency. Serious deficiencies that are not corrected immediately shall result in suspension of work until items identified are brought back into compliance.

At the end of each day's work, the Contractor shall correct all pavement edge drop-offs in accordance with Table 6G-1 in the Delaware MUTCD. This corrective work shall be accomplished with Temporary Roadway Material (TRM) unless an alternate method is specified in the Plans. All ruts and potholes shall be filled with TRM as soon as possible but no later than the end of each work day. Placement and Payment of TRM shall be completed in accordance with Section 403 of the Standard Specifications. If temporary elimination of a drop-off hazard cannot be accomplished, then the area should be properly marked and protected with temporary traffic control devices such as temporary barricades, warning signs, flashing lights, etc. as required by Section 6G.21 of the Delaware MUTCD.

All open trench excavation accessible by vehicular traffic must be backfilled prior to the end of each working day. Steel plates shall not be used except in emergency situations and only with prior written approval from the Engineer unless otherwise directed by the Plans.

The Contractor shall submit, at or prior to the preconstruction meeting, detailed drawings including but not limited to existing striping lengths, lane and shoulder widths, turn lane lengths, locations of stop bars, turn arrows, crosswalks and railroad crossings. The drawings shall depict the existing pavement markings for each project location. These drawings will be reviewed by the Department's Traffic Section to determine the need for modification(s) for compliance with the Delaware MUTCD. Temporary pavement markings, on the final pavement surface, shall match the Plan dimensions and layout or the approved drawings of the permanent markings in compliance with Section 3 of the Delaware MUTCD. All conflicting or errant striping shall be removed as directed by the Engineer in compliance with the specifications for Item 817031 - Removal of Pavement Striping.

At the end of each day's operation and before traffic is returned to unrestricted roadway use, temporary striping shall be utilized when the existing pavement is milled and hot mix will not be placed the same day or more than a single course of hot mix is to be placed or permanent roadway striping cannot be placed on the same day as the placement of the final course of hot mix. Placement of temporary striping shall receive prior approval from the Engineer and the contractor shall apply temporary pavement markings in accordance with the requirements of Section 817 of Delaware Standard specifications and the Delaware MUTCD. Payment for temporary pavement striping shall be made at the unit price bid for item 817 - Temporary Striping. Payment for final striping will be included in the applicable striping item.

The Contractor shall have temporary striping/delineating materials (such as raised markers, tape, and other approved materials) available at the job site for verification by the Department prior to starting the hot-mix paving operation on roads to be immediately opened to traffic. These materials shall be used by the Contractor for temporary markings if he/she fails to apply temporary marking paint, etc., as required by the Delaware MUTCD. No paving operations on roads to be immediately opened to traffic will be allowed unless such verification has been made for the availability of the materials at the job site.

Travel lane and ramp closings on multilane highways and Interstates shall not be permitted during the following holiday periods:

- December 24 through December 27 (Christmas Day)
- December 31 through January 3 (New Years Day)
- Friday prior to Easter through Easter Sunday
- Thursday prior to Memorial Day through the Tuesday following Memorial Day
- Dover International Speedway Race Weekends (Thursday prior to the race event through the day after the race event)
- July 3 through July 5 (Independence Day)
- Thursday prior to Labor Day through the Tuesday following Labor Day
- Wednesday prior to Thanksgiving Day through the Monday following Thanksgiving Day

Additional time restrictions may apply as noted in the project plans or as directed by the Engineer. Any requests to waive any restrictions must be made in writing to the Engineer for review and approval. A copy of the request shall be provided to the District Safety Officer for review.

Certification:

Temporary traffic control devices used on all highways open to the public in this State shall conform to the Delaware MUTCD. All devices shall be crashworthy in accordance with the National Cooperative Highway Research Program (NCHRP) Report 350, the memorandum issued August 28, 1998 by The USDOT Federal Highway Administration, and/or in accordance with the latest edition of the Manual for Assessing Safety Hardware (MASH), published by the American Association of State Highway and Transportation Officials (AASHTO).

The Contractor shall submit certification for temporary traffic control devices or vendors used specifically on this project at or prior to the pre-construction meeting.

Certification of compliance with NCHRP report 350 and/or MASH is required for the following categories of temporary traffic control devices:

Category I contains small and lightweight channelizing and delineating control devices which includes cones, tubular markers, flexible delineator post and drums, all without any accessories or attachments.

Category II includes temporary traffic control devices that are not expected to produce significant vehicular velocity changes to impacting vehicles. These devices which shall weigh 100 pounds or less, include Type I, II and III barricades, portable sign supports with signs, and intrusion alarms. Also included are drums, cones, and vertical panels with accessories or attachments.

Category III includes temporary traffic control devices that are expected to cause significant vehicular velocity changes to impacting vehicles. These devices which weigh more than 100 pounds include temporary barrier, temporary impact attenuators, and truck-mounted attenuators.

Category IV includes portable or trailer-mounted devices such as arrow panels, variable message signs, temporary traffic signals and temporary area lighting.

For Category I devices, the manufacturer or Contractor may self-certify that the devices meet the NCHRP-350 and/or MASH criteria. The Contractor shall supply the Federal Highway Administration's NCHRP-350 and/or MASH acceptance letter for each type of device that falls under Category II and III devices.

Basis of Payment:

Payment will be made at the Lump Sum price for "Maintenance of Traffic", for which price and payment constitutes full compensation for all maintenance of traffic activities accepted by the Engineer, which shall include the cost of furnishing and relocating permanent and temporary traffic control signs, traffic cones or drums, submission of temporary traffic control plan(s), submission of existing pavement marking drawings, submission of all required certifications, labor, equipment and incidentals necessary to complete the item. Payment to furnish and maintain other temporary traffic control devices including but not limited to Portable

P.C.C. Safety Barrier, Truck Mounted Attenuators, Portable Changeable Message Signs, Arrow Panels and Portable Light Assemblies will be made at the contract unit price for each item.

NOTE

If the Contractor does not complete the Contract work within the Contract completion time (including approved extension time), the Contractor shall be responsible for providing the necessary temporary traffic control devices that are required to complete any remaining work. The costs of such temporary traffic control shall be borne by the Contractor. No additional payment will be made to the Contractor to maintain traffic in accordance with the Delaware MUTCD, contract plans and specifications. Temporary traffic control items include, but not be limited to, warning lights, warning signs, barricades, plastic drums, P.C.C. safety barrier, flaggers, traffic officers, arrow panels, message boards, and portable impact attenuators.

10/5/16

BID PROPOSAL FORMS

CONTRACT T201806501.01

UNLESS OTHERWISE DIRECTED, SUBMIT ALL FOLLOWING PAGES TO:

DEPARTMENT OF TRANSPORTATION
BIDDERS ROOM (B1.11.01)
800 BAY ROAD
DOVER, DELAWARE 19901

Identify the following on the outside of the sealed envelope:

- Contract Number T201806501.01
- Name of Contractor

CONTRACT ID: T201806501.01

PROJECT(S): T201806501

All figures must be typewritten.

CONTRACTOR :

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS

SECTION 0001 Category 0001

0010	202004 UNDERCUT EXCAVATION, PATCHING	15.000 CY				
0020	211001 REMOVAL OF PORTLAND CEMENT CONCRETE PAVEMENT, CURB AND SIDEWALK	5100.000 SY				
0030	301002 GRADED AGGREGATE BASE COURSE, TYPE B, PATCHING	60.000 CY				
0040	301003 GRADED AGGREGATE BASE COURSE, TYPE B	60.000 TON				
0050	401005 SUPERPAVE TYPE C, PG 64-22 (CARBONATE STONE)	4600.000 TON				
0060	401026 BITUMINOUS CONCRETE, SUPERPAVE TYPE C, 160 GYRATIONS PG 64-22 PATCHING	3200.000 TON				
0070	401027 BITUMINOUS CONCRETE, SUPERPAVE TYPE B, 160 GYRATIONS PG 64-22 PATCHING	90.000 TON				
0080	401028 BITUMINOUS CONCRETE, SUPERPAVE BITUMINOUS CONCRETE BASE COURSE, 160 GYRATIONS PG 64-22 PATCHING	310.000 TON				

CONTRACT ID: T201806501.01

PROJECT(S): T201806501

All figures must be typewritten.

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0090	401054 SUPERPAVE TYPE C, PG 70-22, THIN LIFT	17600.000 TON				
0100	401501 BITUMINOUS ASPHALT TACK COAT	32000.000 GAL				
0110	401517 STONE MATRIX ASPHALT (SMA) WEARING SURFACE	80.000 TON				
0120	402000 BITUMINOUS CONCRETE PATCHING	1807.000 SYN				
0130	403000 BITUMINOUS CONCRETE AND/OR COLD-LAID BITUMINOUS (TRM) CONCRETE	12.000 TON				
0140	503001 PATCHING PORTLAND CEMENT CONCRETE PAVEMENT, 6' TO 15', TYPE A	250.000 SY				
0150	503002 PATCHING PORTLAND CEMENT CONCRET PAVEMENT, 15' TO 100', TYPE B	210.000 SY				
0160	503006 DOWEL BARS	600.000 EACH				
0170	503503 PATCHING CONCRETE	350.000 SYIN				
0180	504001 CRACK AND JOINT SEALING LESS THAN 3/4 INCH WIDE	1100.000 LF				

CONTRACT ID: T201806501.01

PROJECT(S): T201806501

All figures must be typewritten.

CONTRACTOR :

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0190	504002 CRACK AND JOINT SEALING, 3/4 INCH TO 1 3/4 INCH WIDE	400.000 LF				
0200	602100 REPLACE DRAINAGE INLET GRATE(S)	40.000 EACH				
0210	602130 ADJUSTING AND REPAIRING EXISTING DRAINAGE INLET	180.000 EACH				
0220	602132 ADJUSTING AND REPAIRING EXISTING MANHOLE	35.000 EACH				
0230	619002 POINTING EXISTING MASONRY	50.000 LF				
0240	628040 SHALLOW SPALL REPAIR	190.000 CF				
0250	628041 DEEP SPALL REPAIR	190.000 CF				
0260	701012 PORTLAND CEMENT CONCRETE CURB, TYPE 1-6	250.000 LF				
0270	701018 INTEGRAL PORTLAND CEMENT CONCRETE CURB AND GUTTER, TYPE 1-8	250.000 LF				
0280	705001 PORTLAND CEMENT CONCRETE SIDEWALK, 4"	900.000 SF				

CONTRACT ID: T201806501.01

PROJECT(S): T201806501

All figures must be typewritten.

CONTRACTOR : _____

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0290	705002 PORTLAND CEMENT CONCRETE SIDEWALK, 6"	600.000 SF				
0300	705007 SIDEWALK SURFACE DETECTABLE WARNING SYSTEM	5200.000 SF				
0310	705008 CURB RAMP, TYPE 1	3000.000 SF				
0320	705009 CURB RAMP, TYPE 2, 3, AND/OR 4	37500.000 SF				
0330	705010 CURB RAMP, TYPE 5	3000.000 SF				
0340	710002 ADJUST WATER VALVE BOXES	30.000 EACH				
0350	760010 PAVEMENT MILLING, BITUMINOUS CONCRETE PAVEMENT	36000.000 SYIN				
0360	762000 SAW CUTTING, BITUMINOUS CONCRETE	1050.000 LF				
0370	762001 SAW CUTTING, CONCRETE, FULL DEPTH	1050.000 LF				
0380	762003 SAW CUTTING, GREATER THAN 18" IN DEPTH	200.000 LF				
0390	762004 BUTT JOINTS	3600.000 SY				

CONTRACT ID: T201806501.01

PROJECT(S): T201806501

All figures must be typewritten.

CONTRACTOR :

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0400	763000 INITIAL EXPENSE/DE-MOBILIZATION	LUMP	LUMP			
0410	801500 MAINTENANCE OF TRAFFIC, ALL INCLUSIVE	LUMP	LUMP			
0420	802003 ARROW PANELS TYPE C	EADY 260.000				
0430	803001 FURNISH AND MAINTAIN PORTABLE CHANGEABLE MESSAGE SIGN	EADY 40.000				
0440	804001 FURNISH AND MAINTAIN PORTABLE LIGHT ASSEMBLY (FLOOD LIGHTS)	EADY 40.000				
0450	806001 TRAFFIC OFFICERS	HOUR 80.000	75.00000		6000.00	
0460	808002 FURNISH AND MAINTAIN TRUCK MOUNTED ATTENUATOR, TYPE II	EADY 8.000				
0470	811002 FLAGGER, KENT COUNTY, STATE	HOUR 3200.000				
0480	811014 FLAGGER, KENT COUNTY, STATE, OVERTIME	HOUR 215.000				
0490	817002 PERMANENT PAVEMENT STRIPING, SYMBOL/LEGEND, ALKYD-THERMOPLASTIC	SF 3000.000				

CONTRACT ID: T201806501.01

PROJECT(S): T201806501

All figures must be typewritten.

CONTRACTOR :

LINE NO	ITEM DESCRIPTION	APPROX. QUANTITY AND UNITS	UNIT PRICE		BID AMOUNT	
			DOLLARS	CTS	DOLLARS	CTS
0500	817003 TEMPORARY MARKINGS, PAINT, 4"	100000.000 LF				
0510	817004 TEMPORARY MARKINGS, PAINT, SYMBOL/LEGEND	521.000 SF				
0520	817005 PERMANENT PAVEMENT STRIPING, ALKYD-THERMOPLASTIC, 5"	8500.000 LF				
0530	817006 PERMANENT PAVEMENT STRIPING, ALKYD-THERMOPLASTIC, 12"	8500.000 LF				
0540	817013 PERMANENT PAVEMENT STRIPING, EPOXY RESIN PAINT, WHITE/YELLOW, 5"	50000.000 LF				
0550	817015 PREFORMED RETROREFLECTIVE THERMOPLASTIC MARKINGS, BIKE SYMBOL	8.000 EACH				
0560	817027 RAISED/RECESSED PAVEMENT MARKER	500.000 EACH				
0570	846001 FURNISH AND INSTALL LOOP WIRE 1-CONDUCTOR #14 AWG ENCASED IN 1/4" FLEXIBLE TUBING IN A LOOP SAWCUT	900.000 LF				
0580	846002 FURNISH AND INSTALL A 1-1/2 INCH GALVANIZED RIGID METAL CONDUIT DETECTOR SLEEVE WITH LOOP WIRE	200.000 LF				
0590	908001 TOPSOIL	200.000 TON				
0600	908014 PERMANENT GRASS SEEDING, DRY GROUND	1000.000 SY				
	SECTION 0001 TOTAL					
	TOTAL BID					

BREAKOUT SHEET INSTRUCTIONS

BREAKOUT SHEET(S) MUST BE SUBMITTED EITHER WITH YOUR BID DOCUMENTS; OR WITHIN SEVEN (7) CALENDAR DAYS FOLLOWING THE BID DUE DATE BY THE LOWEST APPARENT BIDDER.

BREAKOUT SHEETS ARE TO BE SUBMITTED TO DELDOT'S CONTRACT ADMINISTRATION AS SHOWN BELOW. BREAKOUT SHEETS CANNOT BE CHANGED AFTER AWARD. THE DEPARTMENT WILL REVIEW THE FIGURES SUBMITTED ON THE BREAKOUT SHEET(S) TO ENSURE THEY MATCH THE RESPECTIVE LUMP SUM BID AMOUNT(S). MATHEMATICALLY INCORRECT BREAKOUT SHEETS WILL BE RETURNED FOR IMMEDIATE CORRECTION.

BREAKOUT SHEETS MAY BE SUBMITTED;

VIA E-MAIL TO: DOT-ASK@STATE.DE.US
SUBJECT: **T201806501.01** Breakout Sheet

OR MAILED TO: DELDOT
CONTRACT ADMINISTRATION
PO BOX 778, DOVER, DE 19903

'BREAKOUT SHEET' AND THE PROJECT NUMBER
MUST APPEAR ON THE ENVELOPE.

BREAKOUT SHEET - 1

CONTRACT NO. T201806501.01

Item 801500 - MAINTENANCE OF TRAFFIC, ALL INCLUSIVE

ITEM NO.	APPROX. QTY.	MOT CASE NUMBER	WORKING HOURS	UNIT PRICE	AMOUNT
1	38	TA-10; OPEN-END LOCATIONS FOR PATCHING	TIME RESTRICTIONS FOR OPEN-END LOCATIONS ARE DETERMINED BY THE DISTRICT SAFETY OFFICER AND ENGINEER	\$	\$
2	16	TA-33; OPEN-END LOCATIONS FOR PATCHING	TIME RESTRICTIONS FOR OPEN-END LOCATIONS ARE DETERMINED BY THE DISTRICT SAFETY OFFICER AND ENGINEER	\$	\$
3	12	TA-10; OPEN-END LOCATIONS FOR THIN OVERLAY	TIME RESTRICTIONS FOR OPEN-END LOCATIONS ARE DETERMINED BY THE DISTRICT SAFETY OFFICER AND ENGINEER	\$	\$
4	4	TA-33; OPEN-END LOCATIONS FOR THIN OVERLAY	TIME RESTRICTIONS FOR OPEN-END LOCATIONS ARE DETERMINED BY THE DISTRICT SAFETY OFFICER AND ENGINEER	\$	\$
5	5	TA-3; OPEN-END LOCATIONS FOR SIDEWALK, CURB AND CURB RAMP	TIME RESTRICTIONS FOR OPEN-END LOCATIONS ARE DETERMINED BY THE DISTRICT SAFETY OFFICER AND ENGINEER	\$	\$
6	5	TA-3A; OPEN-END LOCATIONS FOR SIDEWALK, CURB AND RAMP	TIME RESTRICTIONS FOR OPEN-END LOCATIONS ARE DETERMINED BY THE DISTRICT SAFETY OFFICER AND ENGINEER	\$	\$
7	5	TA-28; OPEN-END LOCATIONS FOR SIDEWALK, CURB AND CURB RAMP	TIME RESTRICTIONS FOR OPEN-END LOCATIONS ARE DETERMINED BY THE DISTRICT SAFETY OFFICER AND ENGINEER	\$	\$
8	5	TA-29; OPEN END LOCATIONS FOR SIDEWALK, CURB AND CURB RAMP	TIME RESTRICTIONS FOR OPEN-END LOCATIONS ARE DETERMINED BY THE DISTRICT SAFETY OFFICER AND ENGINEER	\$	\$
TOTAL ITEM 801500 - MAINTENANCE OF TRAFFIC, ALL INCLUSIVE \$ (LUMP SUM BID PRICE FOR ITEM 801500 - MAINTENANCE OF TRAFFIC, ALL INCLUSIVE)					

"ATTENTION"

TO BIDDERS

BREAKOUT SHEET(S) MUST BE SUBMITTED EITHER WITH YOUR BID DOCUMENTS; OR WITHIN SEVEN (7) CALENDAR DAYS FOLLOWING THE BID DUE DATE BY THE LOWEST APPARENT BIDDER.

BREAKOUT SHEETS ARE TO BE SUBMITTED TO DELDOT'S CONTRACT ADMINISTRATION AS SHOWN BELOW. BREAKOUT SHEETS CANNOT BE CHANGED AFTER AWARD. THE DEPARTMENT WILL REVIEW THE FIGURES SUBMITTED ON THE BREAKOUT SHEET(S) TO ENSURE THEY MATCH THE RESPECTIVE LUMP SUM BID AMOUNT(S). MATHEMATICALLY INCORRECT BREAKOUT SHEETS WILL BE RETURNED FOR IMMEDIATE CORRECTION.

BREAKOUT SHEETS MAY BE SUBMITTED;

VIA E-MAIL TO: DOT-ASK@STATE.DE.US
SUBJECT: **T201806501.01** Breakout Sheet

OR MAILED TO: DELDOT
CONTRACT ADMINISTRATION
PO BOX 778, DOVER, DE 19903

'BREAKOUT SHEET' AND THE PROJECT NUMBER
MUST APPEAR ON THE ENVELOPE.



**AFFIDAVIT
OF
EMPLOYEE DRUG TESTING PROGRAM**

4104 Regulations for the Drug Testing of Contractor and Subcontractor Employees Working on Large Public Works Projects requires that Contractors and Subcontractors implement a program of mandatory drug testing for Employees who work on Large Public Works Contracts funded all or in part with public funds.

We hereby certify that we have in place or will implement during the entire term of the contract a Mandatory Drug Testing Program for our employees on the jobsite, including subcontractors, that complies with this regulation:

Contractor Name: _____

Contractor Address: _____

Authorized Representative (typed or printed): _____

Authorized Representative (signature): _____

Title: _____

Sworn to and Subscribed before me this _____ day of _____ 20____.

My Commission expires _____. NOTARY PUBLIC _____.

THIS PAGE MUST BE SIGNED, NOTARIZED, AND RETURNED WITH YOUR BID.

(This form is required from the prime contractor only)

CERTIFICATION
Contract No. T201806501.01

The undersigned bidder, _____
whose address is _____
and telephone number is _____ hereby certifies the following:

I/We have carefully examined the location of the proposed work, the proposed plans and specifications, and will be bound, upon award of this contract by the Department of Transportation, to execute in accordance with such award, a contract with necessary surety bond, of which contract this proposal and said plans and specifications shall be a part, to provide all necessary machinery, tools, labor and other means of construction, and to do all the work and to furnish all the materials necessary to perform and complete the said contract within the time and as required in accordance with the requirements of the Department of Transportation, and at the unit prices for the various items as listed on the preceding pages.

The foregoing quantities are considered to be approximate only and are given as the basis for comparison of bids. The Department of Transportation may increase or decrease the amount of any item or portion of the work as may be deemed necessary or expedient. Any such increase or decrease in the quantity for any item will not be regarded as a sufficient ground for an increase or decrease in the unit prices, nor in the time allowed for the completion of the work, except as provided in the contract.

Accompanying this proposal is a surety bond or a security of the bidder assigned to the Department of Transportation, for at least ten (10) percentum of total amount of the proposal, which deposit is to be forfeited as liquidated damages in case this proposal is accepted, and the undersigned shall fail to execute a contract with necessary bond, when required, for the performance of said contract with the Department of Transportation, under the conditions of this proposal, within twenty (20) days after date of official notice of the award of the contract as provided in the requirement and specifications hereto attached; otherwise said deposit is to be returned to the undersigned.

I/We are licensed, or have initiated the license application as required by Section 2502, Chapter 25, Title 30, of the Delaware Code.

By submission of this proposal, each bidder and each person signing on behalf of any bidder, certifies as to its own organization, under penalty of perjury, that to the best of each signer's knowledge and belief:

1. The prices in this proposal have been arrived at independently without collusion, consultation, communication, or Agreement with any other bidder or with any competitor for the purpose of restricting competition.
2. Unless required by law, the prices which have been quoted in this proposal have not been knowingly disclosed and will not knowingly be disclosed by the bidder, directly or indirectly, to any other bidder or competitor prior to the opening of proposals.
3. No attempt has been made or will be made by the bidder to induce any other person, partnership, or corporation to submit or not to submit a proposal for the purpose of restricting competition.

=====
I/We acknowledge receipt and incorporation of addenda to this proposal as follows:

No.	Date								
_____	_____	_____	_____	_____	_____	_____	_____	_____	_____

BIDDERS MUST ACKNOWLEDGE RECEIPT OF ALL ADDENDA

MUST INSERT DATE OF FINAL QUESTIONS AND ANSWERS ON WEBSITE: _____



AFFIRMATION:

Within the past five (5) years, has your firm, any affiliate, any predecessor company or entity, owner, Director, officer, partner or proprietor been the subject of a Federal, State, Local government suspension or debarment?

YES _____ NO _____ if yes, please explain _____

Sealed and dated this _____ day of _____ in the year of our Lord two thousand _____ (20__).


Name of Bidder (Organization)
Corporate Seal By: _____
Authorized Signature

Attest _____ Title

SWORN TO AND SUBSCRIBED BEFORE ME this _____ day of _____, 20__.

Notary Seal

Notary

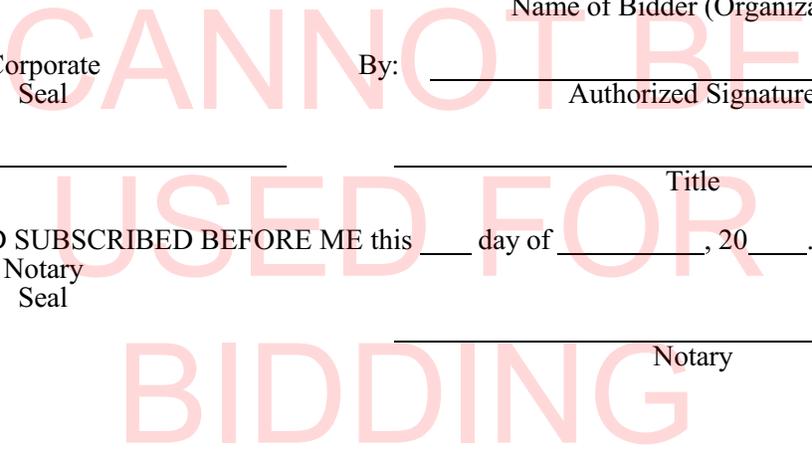

BID BOND

TO ACCOMPANY PROPOSAL
(Not necessary if security is used)

KNOW ALL MEN BY THESE PRESENTS That: _____

of _____ in the County of _____ and State of _____
as **Principal**, and _____ of _____ in the County of _____
and State of _____ as **Surety**, legally authorized to do business in the
State of Delaware ("**State**"), are held and firmly bound unto the **State** in the sum of _____
Dollars (\$ _____), or _____ percent not to exceed _____

_____ Dollars (\$ _____) of amount of bid on
Contract No. T201806501.01, to be paid to the **State** for the use and benefit of its Department of
Transportation ("**DelDOT**") for which payment well and truly to be made, we do bind ourselves, our and
each of our heirs, executors, administrators, and successors, jointly and severally for and in the whole
firmly by these presents.

NOW THE CONDITION OF THIS OBLIGATION IS SUCH That if the above bounden **Principal**
who has submitted to the **DelDOT** a certain proposal to enter into this contract for the furnishing of
certain materiel and/or services within the **State**, shall be awarded this Contract, and if said **Principal**
shall well and truly enter into and execute this Contract as may be required by the terms of this Contract
and approved by the **DelDOT**, this Contract to be entered into within twenty days after the date of official
notice of the award thereof in accordance with the terms of said proposal, then this obligation shall be
void or else to be and remain in full force and virtue.

Sealed with _____ seal and dated this _____ day of _____ in the year of our Lord
two thousand and _____ (20____).

SEALED, AND DELIVERED IN THE
presence of

Name of Bidder (Organization)

Corporate
Seal

By: _____
Authorized Signature

Attest _____

Title

Name of Surety

Witness: _____

By: _____

Title