



STATE OF DELAWARE
DEPARTMENT OF TRANSPORTATION
800 BAY ROAD
P.O. BOX 778
DOVER, DELAWARE 19903

SHANTÉ HASTINGS
SECRETARY

VIA WEBSITE POSTING

August 7, 2026

Contract No. **T202153104.03**

DOVER BUS CANOPY SOLAR PANELS – READVERTISEMENT

Federal No. 5339-2021(02)

Prospective Bidders,

Enclosed is **Addendum No. 2** for the referenced contract consisting of the following:

1. **Revised** Bid Proposal Cover, to be substituted for the same page of the Proposal.
2. **Revised** Plan pages 3 & 21, to be substituted for the same pages of the Plans.
3. **Amendment** file is not required for this addendum.

Please note the revisions listed above and attached, and submit bid based upon this information.

Sincerely,
~signature on file~
Kimberly Smith
Contract Administration
(302) 760-2031

DIGITAL ACCESSIBILITY NOTICE

The Delaware Department of Transportation (DelDOT) is committed to ensuring that its digital services, content, and documents are accessible to all users and is actively working to comply with applicable federal and state accessibility requirements. DelDOT continues to make improvements over time, with current efforts focused on programs, applications, content, and documents that are actively in use and available to the public.

Due to the nature and complexity of certain materials, including construction plans, technical drawings, historical documents, maps, and other graphic-intensive files, some documents may not currently be fully digitally accessible or compliant with current accessibility standards. In some cases, these documents are provided for historical, reference, informational, or procurement purposes only.

If you require an accessible version of a document or need assistance accessing any content, please contact DelDOT at (302) 760-2031 or DOT-ask@delaware.gov and reasonable efforts will be made to provide the information in an accessible format upon request. DelDOT appreciates your patience and understanding as accessibility improvements continue to be implemented.

STATE OF DELAWARE
DEPARTMENT OF TRANSPORTATION

ADDENDUM 2
August 7, 2026



BID PROPOSAL

CONTRACT T202153104.03

**DOVER BUS CANOPY SOLAR PANELS -
READVERTISEMENT**

FTA Funding No. 5339-2021(02)

FTA is providing 80 % of funding for this project

CFDA: 20.526

Advertisement Date: July 1, 2026

INCLUDED IN THIS DOCUMENT:

BID PROPOSAL:

GENERAL DESCRIPTION

PROSPECTIVE BIDDERS NOTES

GENERAL NOTICES

ADDITIONAL BID PROPOSAL ITEMS:

ATTACHED OR POSTED DOCUMENTS:

PROJECT PLANS

QUESTIONS & ANSWERS (if posted)

REFERENCED DOCUMENTS

BIDDERS LIST

**PAPER BIDDERS CONTACT DELDOT
FOR BID SUBMITTAL DOCUMENTS:**

DRUG TESTING AFFIDAVIT

CERTIFICATION FORM

BID BOND FORM

CD FOR BID PRICE ENTRY & PRINTING

BIDDERS LIST

This Bid Proposal and related documents can be viewed on <https://bids.delaware.gov/> and, for subscribers <https://bidx.com/de/main>

Internet Bids for Bidders with Bid Express® accounts can be submitted at [BIDX.com/de](https://bidx.com/de/); **OR**;

Paper Bids with CD will be received in the Bidder's Room at the DelDOT Administration Building, Dover, DE;

ALL BIDS DUE PRIOR TO 2:00 P.M. Local Time, AUGUST 18, 2026

ADDENDUM PREPARED BY
JMT


SEAL

Paul Reutter

7-30-26

THIS SEAL APPLIES TO THE FOLLOWING
SHEETS CHANGED UNDER ADDENDUM #2: 21

DATE

REVISION PREPARED BY
JMT

THIS SEAL APPLIES TO THE FOLLOWING
SHEETS CHANGED UNDER ADDENDUM #X:
XX, XX-XX, XX

DATE

AD-01											
ADDENDA / REVISIONS				NOT TO SCALE	DOVER BUS CANOPY SOLAR PANELS	CONTRACT		BRIDGE NO.	N/A	ADDENDA AND REVISIONS	SECTION
 ADDENDUM 2 - REVISING INVERTER LAYOUT - 7-30-26						T202153104.03		DESIGNED BY: P. REUTTER			JMT
						COUNTY					SHEET NO.
											KENT

GENERAL SHEET NOTES:

1. INFORMATION SHOWN ON THIS DRAWING PERTAINING TO EXISTING CONDITIONS HAS BEEN OBTAINED FROM AVAILABLE BUILDING DRAWINGS OR GENERAL FIELD OBSERVATIONS AND MAY NOT INDICATE ACTUAL EXISTING CONDITIONS IN DETAIL OR DIMENSION. THE CONTRACTOR IS RESPONSIBLE FOR DETERMINING THE ACTUAL EXISTING CONDITIONS PRIOR TO FABRICATION OR PERFORMANCE OF ANY WORK. SHOULD CONDITIONS BE DISCOVERED THAT PREVENT EXECUTION OF THE WORK AS INDICATED, THE CONTRACTOR SHALL IMMEDIATELY NOTIFY THE ARCHITECT IN WRITING AND AWAIT DIRECTION BEFORE PROCEEDING WITH THE WORK.
2. UNLESS OTHERWISE NOTED, ELECTRICAL ITEMS SHOWN HEAVY SOLID (————) SHALL BE NEW, AND ELECTRICAL ITEMS SHOWN LIGHT SOLID (-----) SHALL BE EXISTING TO REMAIN.
3. ALL WIRING SHALL BE INSTALLED IN CONDUIT, INCLUSIVE OF LOW VOLTAGE/CONTROL WIRING. BURIED CONDUIT SHALL BE PVC SCHEDULE 40. CONDUIT SHALL BE ENCASED IN CONCRETE UNDER DRIVE AISLES AND PARKING AREAS, AND DIRECT BURIED IN ALL OTHER AREAS.
4. COORDINATE EXACT LOCATIONS OF DIRECT BURIES DUCTBANKS WITH DTC.
5. REFER TO SHEET E-601 FOR ELECTRICAL PANEL SCHEDULES, SINGLE LINE, AND FIXTURE SCHEDULES.
6. COMMUNICATIONS DUCTBANK SHALL HAVE AT LEAST 12 INCHES OF SEPARATION FROM POWER DUCTBANK.
7. CONTRACTOR SHALL SUPPORT CONDUITS AS REQUIRED BY NEC.
8. REFER TO SHEET DT-02 FOR TRAFFIC RATED JUNCTION WELL DETAILS WITHIN PARKING LOT LIMITS. COORDINATE WITH CIVIL PLANS.

SHEET KEYNOTES:

- 1 PROVIDE LIGHTING FIXTURE MOUNTED TO THE UNDERSIDE OF THE CANOPY. EXISTING LIGHTING CONTROLS FROM BUILDING SHALL BE RE-USED, (TYPICAL)
- 2 COORDINATE FINAL LOCATION AND TERMINATION REQUIREMENTS OF CCTV HEAD-END EQUIPMENT WITH OWNER.
- 3 PROVIDE SOLAR ARRAY INVERTER MOUNTED TO CANOPY COLUMN. COORDINATE FINAL LOCATION WITH SOLAR PANEL LAYOUT.
- 4 LIGHTING FIXTURE POWER SHALL BE DISCONNECTED FROM EXISTING SOURCE AND RE-ROUTED TO ALTERNATE EXISTING LIGHTING CIRCUIT. MATCH ALTERNATING CIRCUIT NUMBER SCHEME USED ON NEW CIRCUIT FOR LIGHTING (1,3,5 ETC.). SEE CIVIL PLANS FOR PHASING REQUIREMENTS.
- 5 PROVIDE NEW 1" CONDUIT FOR CONNECTING EXISTING-TO-REMAIN LIGHTING FIXTURES TO ALTERNATE EXISTING POWER SOURCE. MATCH CONDUIT TYPE, AND WIRING SIZE AND TYPE FOR CIRCUIT CONNECTION.
- 6 REFER TO DETAIL 1 ON SHEET E-502 FOR MORE INFORMATION ON VERTICAL CONDUIT ROUTING TRANSITIONS.
- 7 REFER TO DETAIL 2 ON SHEET E-502 FOR MORE INFORMATION ON VERTICAL CONDUIT ROUTING TRANSITION INTO BUILDING. COORDINATE TERMINATION LOCATION OF CCTV CONDUIT WITH OWNER.
- 8 PROVIDE JUNCTION WELL FOR INTERCEPTING EXISTING POWER CONDUIT FOR NEW CCTV EQUIPMENT. USE A SPARE BREAKER FOR EACH CANOPY FROM PANEL "F1" TO NEW CANOPY MOUNTED CCTV EQUIPMENT. JUNCTION WELL IN DRIVE ISLES, OR SUBJECT TO TRAFFIC SHALL BE RATED FOR THOSE CONDITIONS AND SIZED PER NEC REQUIREMENTS. SEE SHEET DT-03 FOR ADDITIONAL DETAILS OF DRIVE AISLE RATED JUNCTION WELL.
- 9 PROVIDE JUNCTION WELL TYPE 1 FOR NEW CANOPY LIGHTING CIRCUIT, AND TO FEED EXISTING PERIMETER LIGHTING CIRCUIT. USE SPARE BREAKER FROM PANEL H2 IN ELECTRICAL ROOM 185 FOR THE TWO NEW CIRCUITS. SEE CIVIL PLANS FOR PHASING REQUIREMENTS.
- 10 PROVIDE JUNCTION WELL FOR INTERCEPTING EXISTING POWER FOR SITE LIGHTING. USE SPARE BREAKERS FROM PANEL H3A IN ELECTRICAL ROOM 111 FOR NEW CANOPY LIGHTING CIRCUIT. JUNCTION WELLS IN DRIVE AISLES, OR SUBJECT TO TRAFFIC SHALL BE RATED FOR THOSE CONDITIONS AND SIZED PER NEC REQUIREMENTS. SEE CIVIL PLANS FOR PHASING REQUIREMENTS. SEE SHEET DT-03 FOR ADDITIONAL DETAILS OF DRIVE AISLE RATED JUNCTION WELL.
- 11 LIGHTING FIXTURE POWER SHALL BE DISCONNECTED FROM EXISTING SOURCE AND RE-ROUTED TO NEW LIGHTING CIRCUIT FROM PANEL H2 IN ELECTRICAL ROOM 185. SEE CIVIL PLANS FOR PHASING REQUIREMENTS.
- 12 PROVIDE QUAZITE HANDHOLE ADJACENT TO POLE FOR INTERCEPTING CONDUIT, AND EXTENDING CONDUIT TO EXISTING POLE MOUNTED FIXTURE. COORDINATE FINAL LOCATION WITH EXISTING LIGHTING. SEE DETAIL 2 ON SHEET E-501 FOR ADDITIONAL DETAIL.


LEGEND

DRAWING SYMBOL FOR CONDUIT/WIRING DESCRIPTION.

AA UNDERGROUND CONDUITS

NOTES:

- SEE CONDUIT/WIRING SCHEDULE ON DRAWING E-503.

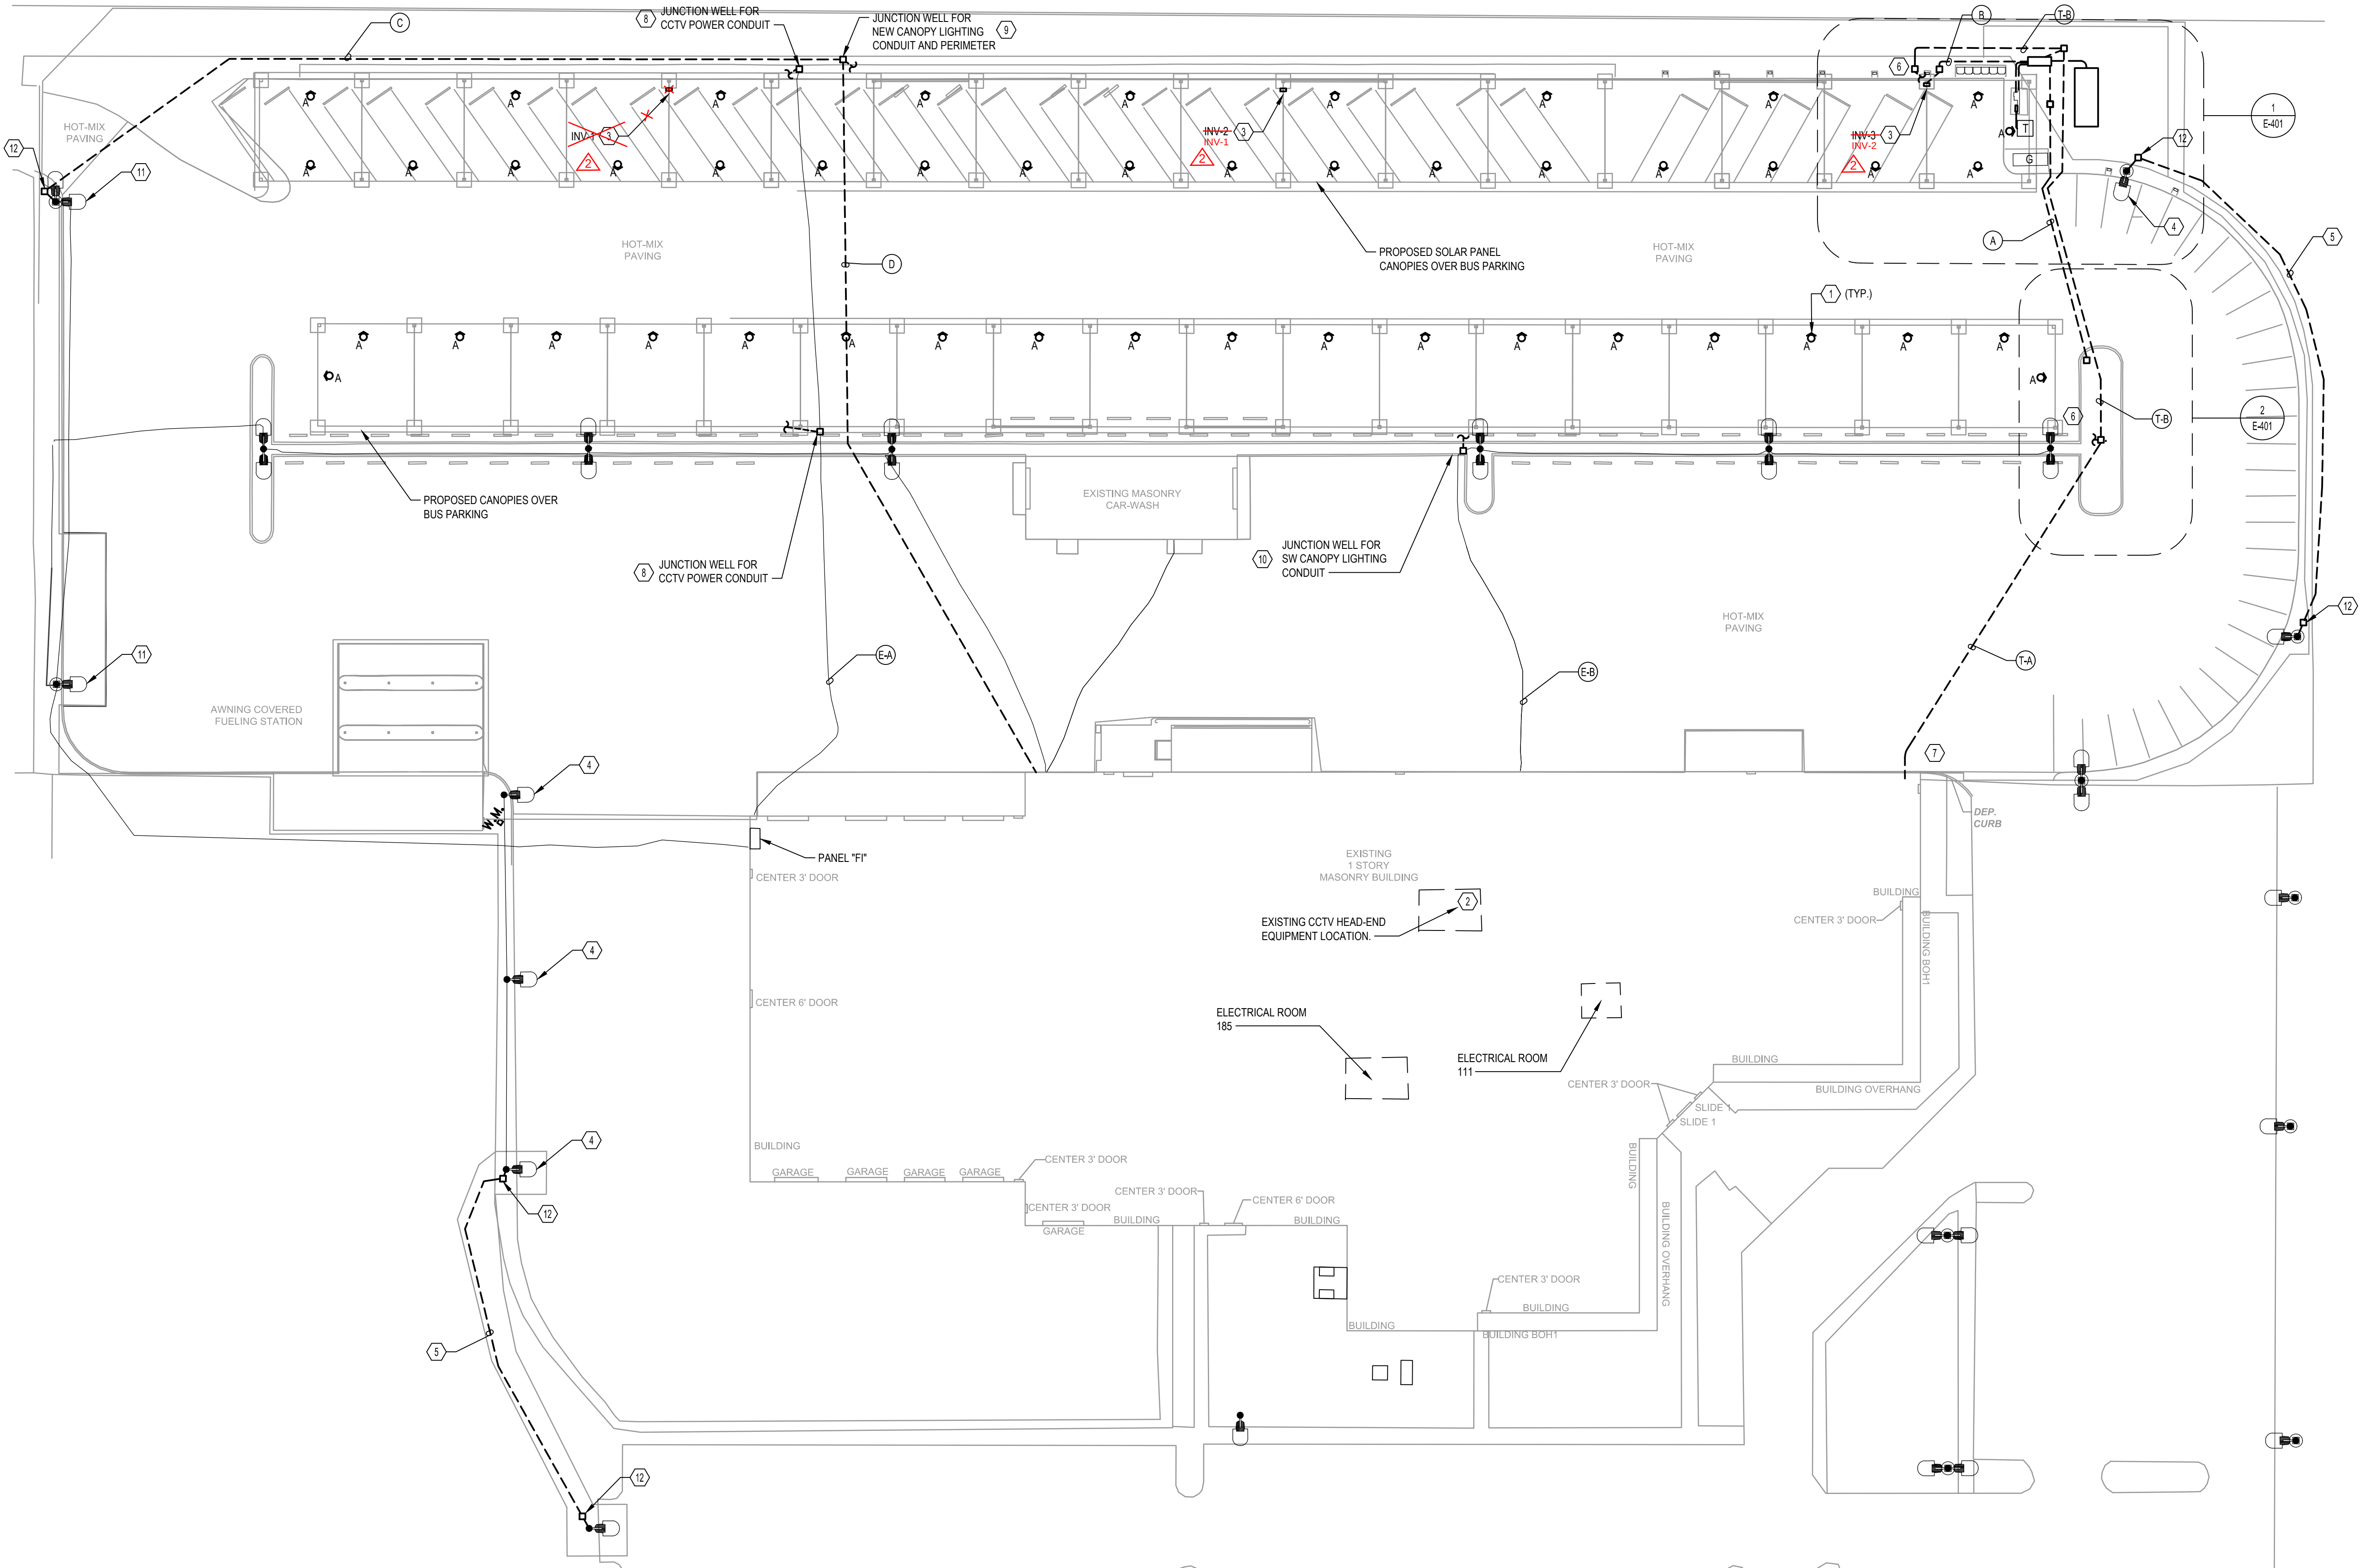

1 ELECTRICAL SITE PLAN - NEW WORK
E-101 SCALE: 1"= 30'-0"

15' 0 15' 30'
SCALE: 1"= 30'-0"

ADDENDUMS / REVISIONS

ADDENDUM 2 - REVISING INVERTER LAYOUT - 7-30-26

DOVER BUS CANOPY
SOLAR PANELS

CONTRACT	BRIDGE NO.	N/A
T202153104.02	DESIGNED BY:	JRM
COUNTY	CHECKED BY:	JL
KENT		

ELECTRICAL SITE
PLAN - NEW

E-101

SECTION

JMT

SHEET NO.

21